

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09641217800](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

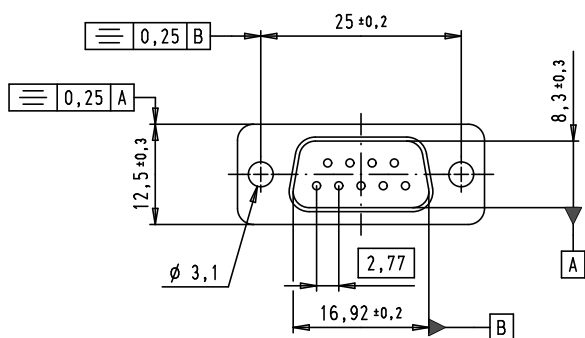


SPECIFICATIONS

FREQUENCY (MHz)	ATTENUATION (dB)
5	0,5
10	1
50	2,5
100	3
500	3,5
1000	4

Operating voltage	< 250 V AC
Working current	< 7,5 A
Insulation resistance	> 16Ω
Contact resistance	< 15 mΩ
Dielectric withstanding voltage	500 V AC / minute

Solder bucket termination inner diameter: 1,20 mm

			Det.	Name
			Detail.	11/06/09 PK
			Insp.	
			Stand.	
36160	22/09/10	SC		
EC00332	11/06/09	PK		
Mod.	Det.	Name		



D-Sub, male, straight, 9 poles, tin plated shell with dimples, solder buckets, ferrite filter

Maßstab/
Scale
1,5:1

09 64 121 7800	PL3
Part number	Performance level

HARTING EURL
F-95972 Paris



TB 09 64 121 7800

Sub.

Blatt/ Page
1 / 1