

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)


[09670370511](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

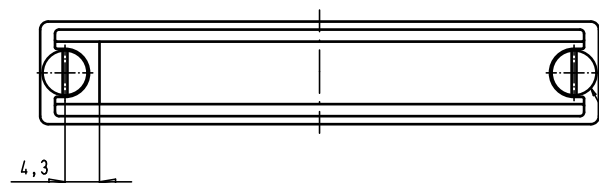

Slotted pan head tapping screws
DIN 7971-ST 2,9x6,5-F
screwing torque=35Ncm +/-5Ncm

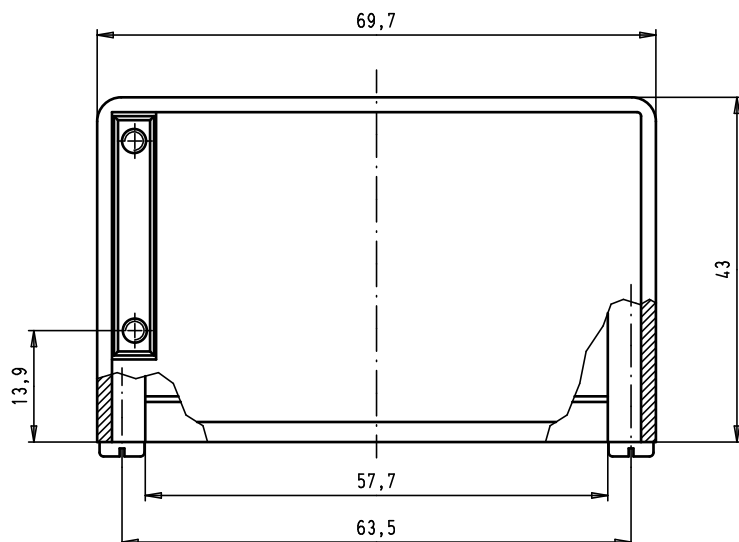

Slotted pan head tapping screws
DIN 7971-ST 2,2 x 9,5-F
Maximum screwing torque= 0,25 mN

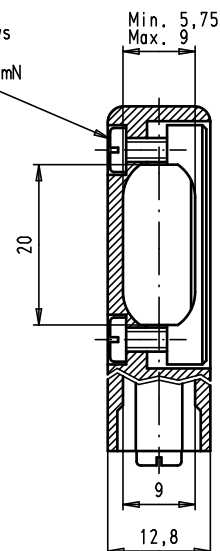

			Det.	Name	
			Detail.	28/03/02	CV
			Insp.	25-MAY-11	JMDV
			Stand.		
EC03223	25-MAY-11	SD			
34886	26/02/08	PK			
29760	28/03/02	CV			
Mod.	Det.	Name			

HARTING EURL
F-95972 Paris



D-Sub, hood 37 poles
for spring or slide
locking, side cable entry

Maßstab/
Scale

1,5:1

09 67 037 0513	Thermoplastic metallized
09 67 037 0511	Thermoplastic grey RAL 7032
Part number	Material

TB 09 67 037 051X
Sub.

Blatt/ Page
1 / 1