

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[21032821405](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

(1:1)



ca. 52

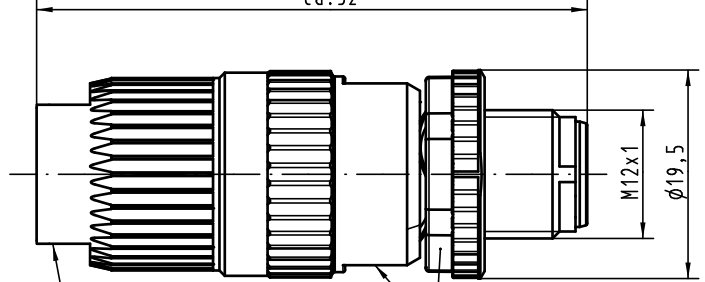


SW13

width across flats 13

SW17

width across flats 17

Steckgesicht n.
Contact face acc.to
IEC 61076-2-101




Leiterquerschnitt
conductor cross section

0,34 - 0,75mm²
AWG22-AWG18

Kabeldurchmesser
cable outside diameter

4,5 - 8,8mm



All Dimensions in mm
Original Size DIN A 4

Techn. Character.

Dat.

Name

Maßstab/Scale

EC01527

01.07.11

DY

Detail.

10.01.05

DY

413867

13.05.08

DY

Insp.

SR

412800

19.03.07

DY

Stand.

411606

08.08.05

DY

411391

Mod.

Dat.

Name

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



Nicht tolerierte Maß/Free size tolerances

M12-L

RSV geschirmt, Stift, D-kodiert, 4-polig
Circular Connector shielded, male,
D-coded, 4-pole

TB 21 03 282 1405

Sub.

Blatt/ page