



**Distributor of Molex Connector Corporation: Excellent Integrated System Limited**  
Datasheet of 0192030380 - Connector Quick Connect Receptacle 10-12 AWG 0.250"  
(6.35mm) Crimp

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)  
[0192030380](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

This document was generated on 02/24/2015

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **19016-0006**  
**Status:** **Active**  
**Overview:** Standard Quick-Disconnect Terminals  
**Description:** Krimptite™ Quick Disconnect, Female, for 18-22 (0.80-0.35mm<sup>2</sup>) Wire, Box, Tab 4.75 x 0.81mm

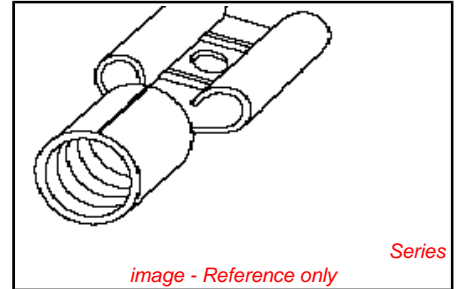

**Documents:**

- [Drawing \(PDF\)](#)
- [Product Specification PS-19902-005 \(PDF\)](#)
- [Product Specification PS-19902-011 \(PDF\)](#)
- [Product Specification PS-19902-013 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR18689  
 UL E79133

**General**

Product Family Quick Disconnects  
 Series 19016  
 Comments Butted Seam  
 Crimp Quality Equipment Yes  
 Insulated No  
 Overview [Standard Quick-Disconnect Terminals](#)  
 Product Name Krimptite™  
 Type Quick Disconnect  
 UPC 800753034419

**Physical**

Barrel Type Closed  
 Gender Female  
 Glow-Wire Compliant No  
 Insulation None  
 Lock to Mating Part None  
 Material - Metal Brass  
 Material - Plating Mating Tin  
 Material - Plating Termination Tin  
 Net Weight 0.441/g  
 Orientation Straight  
 Packaging Type Bag  
 Polarized to Mating Part No  
 Tab Thickness 0.81mm  
 Tab Width 4.75mm  
 Temperature Range - Operating Per Wire Specification  
 Wire Size AWG 18, 20, 22  
 Wire Size mm<sup>2</sup> 0.35 - 0.80

**Electrical**

Voltage - Maximum Per Wire Specification

**Material Info**

Old Part Number AA-1137-032

**Reference - Drawing Numbers**

Product Specification PS-19902-005, PS-19902-011, PS-19902-013  
 Sales Drawing SD-19016-004

<p><b>EU RoHS</b>  <b>ELV and RoHS</b>  <b>Compliant</b>  <b>REACH SVHC</b>          Not Reviewed  <b>Low-Halogen Status</b>  <b>Low-Halogen</b></p>	<p><b>China RoHS</b></p>
--	--------------------------

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
 19016Series

**Application Tooling | FAQ**  
*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Hand Crimp Tool	<a href="#">0640031100</a>
Crimp Head for the AT-200™ Pneumatic Hand Tool	<a href="#">0640071100</a>



**Distributor of Molex Connector Corporation: Excellent Integrated System Limited**  
Datasheet of 0192030380 - Connector Quick Connect Receptacle 10-12 AWG 0.250"  
(6.35mm) Crimp

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

This document was generated on 02/24/2015

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**