



Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0190030023 - Connector Quick Connect Receptacle 18-22 AWG 0.187"
(4.75mm) Crimp

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0190030023](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

This document was generated on 03/02/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0190030023](#)
Status: **Active**
Overview: Standard Quick-Disconnect Terminals
Description: InsulKrimp™ Quick Disconnect, Female, for 18-22 (0.80-0.35mm²), Mylar Tape, Tab 4.75 x 0.81mm

Documents:

- | | |
|--|--|
| 3D Model | Product Specification PS-19902-011 (PDF) |
| Drawing (PDF) | Product Specification PS-19902-015 (PDF) |
| Product Specification PS-19902-008 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

CSA	LR18689
UL	E79133

General

Product Family	Quick Disconnects
Series	19003
Comments	Funnel Entry
Crimp Quality Equipment	Yes
Insulated	Fully
Overview	<u>Standard Quick-Disconnect Terminals</u>
Product Name	InsulKrimp™
Type	Quick Disconnect
UPC	800753028777

Physical

Barrel Type	Closed
Color - Resin	Red
Flammability	94V-2
Gender	Female
Glow-Wire Compliant	Yes
Insulation	Nylon (PA)
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	0.842/g
Orientation	Straight
Packaging Type	Adhesive Tape on Reel
Plating min - Mating	4.064µm
Plating min - Termination	4.064µm
Polarized to Mating Part	No
Tab Thickness	0.81mm
Tab Width	4.75mm
Temperature Range - Operating	-65°C to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	5.84mm max.
Wire Size AWG	18, 20, 22


Electrical

Voltage - Maximum	600V
-------------------	------

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

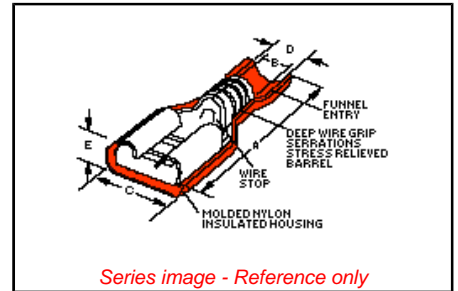

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per - ED/108/2014 (17 Dec 2014)

Halogen-Free Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant

Search Parts in this Series

[19003 Series](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Mini-Mac™ Applicator	0638857000
ATP Crimp Dies for the Tape Crimp Module and ATP-101 & 301 Press	0192880049



Distributor of Molex Connector Corporation: Excellent Integrated System Limited
Datasheet of 0190030023 - Connector Quick Connect Receptacle 18-22 AWG 0.187"
(4.75mm) Crimp

Old Part Number

AA-2203XT

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Reference - Drawing Numbers

Product Specification

PS-19902-008, PS-19902-011, PS-19902-015

Sales Drawing

SD-19003-006

This document was generated on 03/02/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION