

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0513389873](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

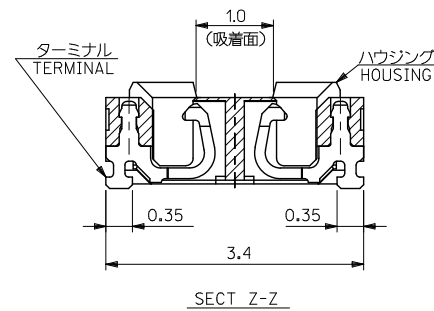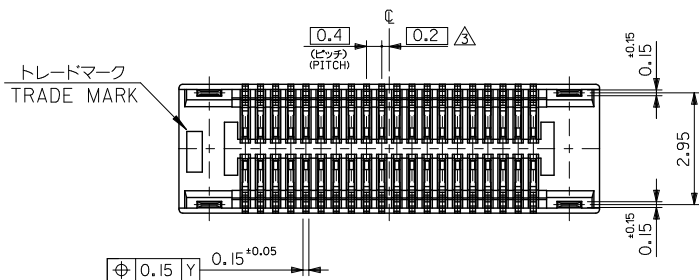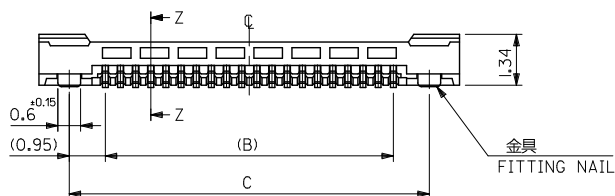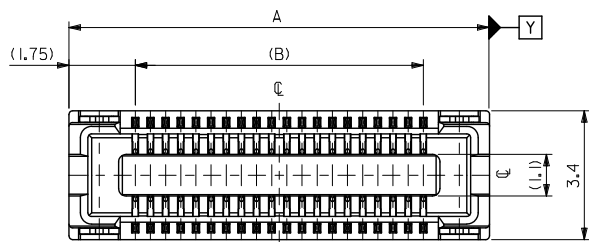

14.3	12.4	15.9	51338-6473	64
12.3	10.4	13.9	51338-5473	54
10.3	8.4	11.9	51338-4473	44
3.5	1.6	5.1	51338-9873	10
C	B	A	EMBOSSD TAPE PKG	極数
			ORDER No. オーダー番号	CIRCUIT

REVISED		EC NO.: I2010-2586		DRAWN: Y0002		CHK'D: S. MARIYAMA		2010/06/14		2010/06/29		2010/06/29		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		SERIES No.: 51338-***9		THIRD ANGLE PROJECTION			
																MM ONLY		---		METRIC							
REVISED		DESCRIPTION		10 UNDER		± 0.2		DRAWN BY		DATE		TITLE															
				10 OVER 30 UNDER		± 0.25		Y. NUKANOBU		2010/01/25																	
				30 OVER		± 0.3		CHECKED BY		DATE																	
				ANGULAR		± 3 °		S. MARIYAMA		2010/01/25																	
REVISED		DESCRIPTION						APPROVED BY		DATE		MOLEX INCORPORATED															
								M. SASAO		2010/01/25																	
								MATERIAL NO.				DOCUMENT NO.															

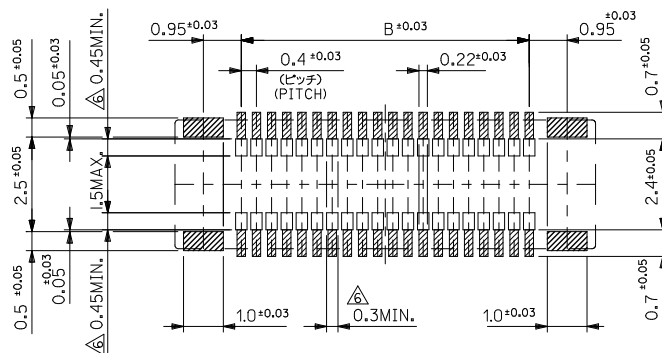

参考基板レイアウト (マウント面)
P.W. BOARD PATTERN DIMENSION (REFERENCE)
(MOUNTING AREA)

注記 NOTES:

1. 使用材料 MATERIAL
ハウジング: 液晶ポリマー (LCP) ガラス充填 UL94V-0 (黒)
HOUSING: LIQUID CRYSTAL POLYMER (GLASS FILLED)
UL94V-0 (COLOR: BLACK)
ターミナル: リン青銅 (t=0.15)
TERMINAL: PHOSPHOR BRONZE (t=0.15)
金具: リン青銅 (t=0.15)
FITTING NAIL: PHOSPHOR BRONZE (t=0.15)
 2. メッキ仕様 PLATING
ターミナル TERMINAL
金メッキ 0.2 マイクロメートル以上 (コンタクト部)
GOLD 0.2 MICROMETER MINIMUM (CONTACT AREA)
金メッキ 0.4 マイクロメートル以上 (テール部)
GOLD 0.4 MICROMETER MINIMUM (TAIL AREA)
下地メッキ: ニッケルメッキ 1.5 マイクロメートル以上
UNDER PLATING: NICKEL 1.5 MICROMETER MINIMUM
* コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.
金具 FITTING NAIL
鍍メッキ 1.0 マイクロメートル以上
TIN PLATING 1.0 MICROMETER MINIMUM
下地メッキ: ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING: NICKEL 1.0 MICROMETER MINIMUM
- △ (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.
4. 嵌合相手: 55909シリーズ
MATE WITH: 55909 SERIES.
 5. テール平坦度は、0.08以下
TAIL COPLANARITY TO BE 0.08 MAXIMUM
テール及び金具の平坦度は、0.1以下
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM
- △ 同一回路以外のパターン書き込み禁止範囲を示す。
NO PRINT CIRCUIT AREA OTHER THAN THE SAME CIRCUIT.
7. 本製品は 51338-***3 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***3.
 8. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT


REVISED	EC NO. J2010-2586	2010/06/24	DRWN:YON002	2010/06/29	CHKD:S. MARIYAMA	2010/06/29	APPR:M.SASAO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		CONNECTOR SERIES NO.: 51338-***9		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
									10 UNDER ± 0.2		DRAWN BY Y. NUKANOBU		DATE 2010/01/25		TITLE 0.4 B-T0-B REC ASSY HGT=1.5 J-BEND TAIL					
									10 OVER 30 UNDER ± 0.25		CHECKED BY S. MARIYAMA		DATE 2010/01/25							
									30 OVER ± 0.3		APPROVED BY M. SASAO		DATE 2010/01/25		MOLEX INCORPORATED					
									ANGULAR ± 3 °		MATERIAL NO. SEE SHEET 1		DOCUMENT NO. SD-51338-005							
B								REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10 9 8 7 6 5 4 3 2 1

CONFIDENTIAL

NOTES

- 製品詳細寸法については、SD-51338-005 を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING SD-51338-005.
- 梱包数量 : 2500個/リール
NUMBER OF CONNECTORS : 2500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

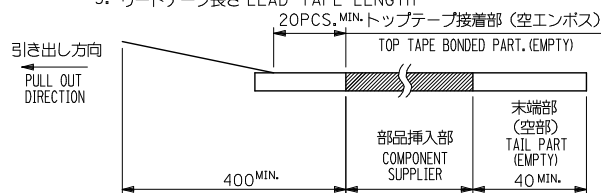

4. 材料


キャリアテープ : PS
トップテープ : PS, OTHER
リール : PS<リサイクル材を含む>

MATERIAL

CARRIER TAPE : PS
TOP TAPE : PS, OTHER
REEL : PS <RECYCLE MATERIAL CONTAINED>


5. ELV 及び RoHS 適合品。

ELV AND RoHS COMPLIANT.

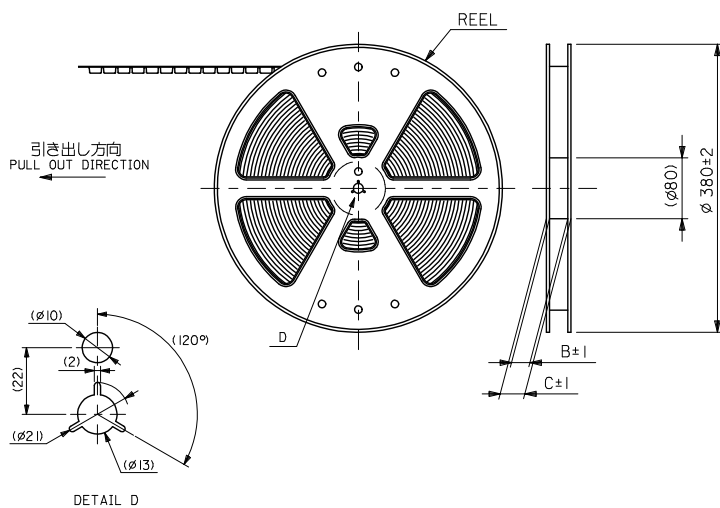

REVISED	EC NO.	DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
REVISED	J2015-0987	DRINKMI YAHARA	2015/01/27	CHIKO TAKAKA	2015/09/07	APPR. MORIKAWA	2015/09/11			
DESCRIPTION										
GENERAL TOLERANCES (UNLESS SPECIFIED)										
0.25 UNDER UNDER ±0.03										
0.25 OVER 0.5 UNDER ±0.05										
0.5 OVER 1.0 UNDER ±0.1										
1.0 OVER 10 UNDER ±0.2										
10 OVER 30 UNDER ±0.25										
30 OVER ±0.3										
ANGULAR ±3 °										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
SEE CHART										
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

CONFIDENTIAL

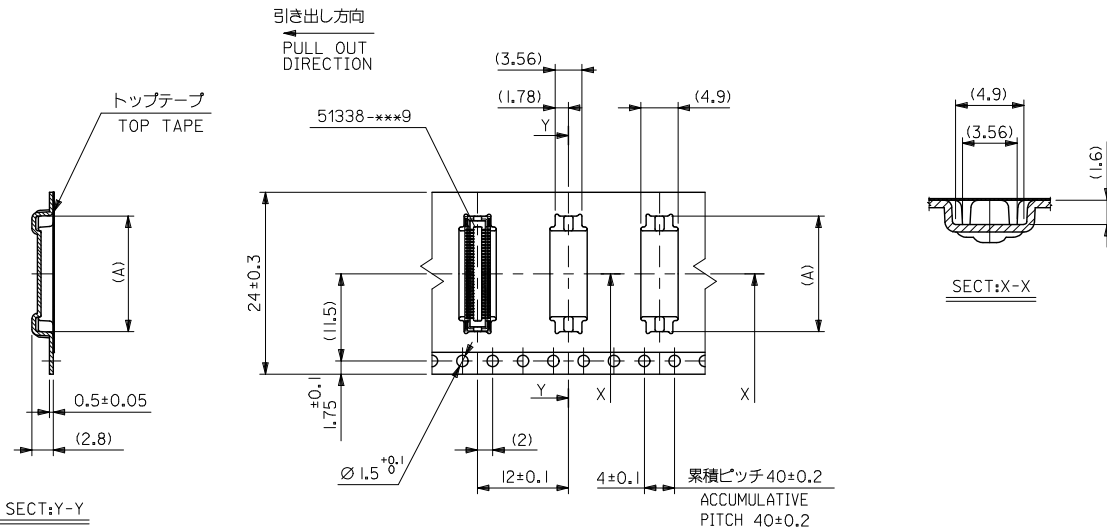

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

注記) 製品がポケット内に問題なく納まること。
NOTE. Pocket should contain product smoothly.

24	29.4	25.4	16.06	51338-6473	64
			14.06	51338-5473	54
			12.06	51338-4473	44
			5.26	51338-9873	10
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	オーダー番号 ORDER NO.	極数 CIRCUITS

REVISED EC NO. J2015-0987 DRAWN BY YAHARA 2015/01/27 CHKD KATANAOKI 2015/09/07 APPR. MORIKAWA 2015/09/11 A	DESCRIPTION REV A	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
		0.25 UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 0.4 B-TO-B CONN. REC HSG ASSY(HGT=1.5) EMBSTP PKG				
		0.25 OVER	0.5 UNDER	±0.05	YON002	2010/06/23					
		0.5 OVER	1.0 UNDER	±0.1	CHECKED BY		DATE				
		1.0 OVER	10 UNDER	±0.2	APPROVED BY		DATE	molex			
		10 OVER	30 UNDER	±0.25	MSASAO		2010/06/29				
		30 OVER		±0.3	MATERIAL NO.		DOCUMENT NO.				
		ANGULAR	±3 °		SEE CHART		SD-51338-006				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
					SHEET NO. 2 OF 2						

A