

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0513386473](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

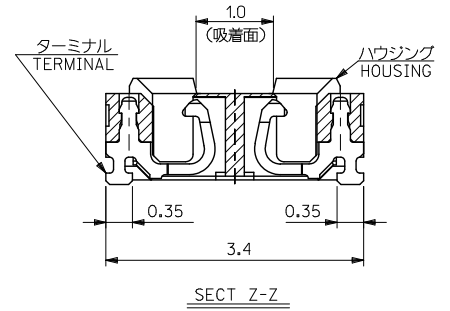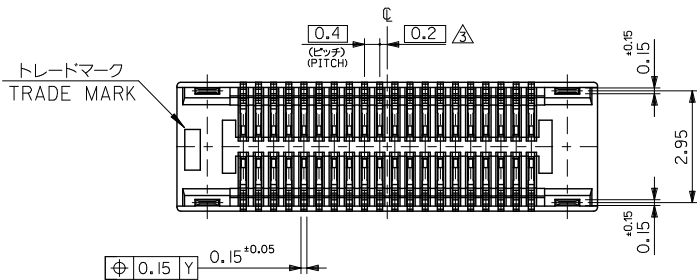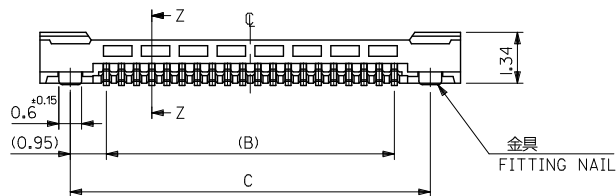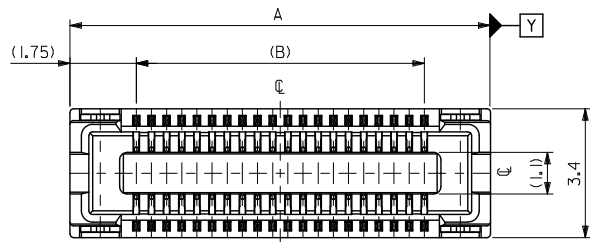

14.3	12.4	15.9	51338-6473	64
12.3	10.4	13.9	51338-5473	54
10.3	8.4	11.9	51338-4473	44
3.5	1.6	5.1	51338-9873	10
C	B	A	EMBOSSD TAPE PKG	極数 CIRCUIT
CONNECTOR SERIES No.: 51338-***9				
ORDER No. オーダー番号				

GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---
10 UNDER	± 0.2	DRAWN BY Y. NUKANOBU	DATE 2010/01/25	TITLE 0.4 B-T0-B REC ASSY HGT=1.5 J-BEND TAIL
10 OVER 30 UNDER	± 0.25	CHECKED BY S. MARIYAMA	DATE 2010/01/25	MOLEX INCORPORATED
30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2010/01/25	
ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51338-005
REVISED		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

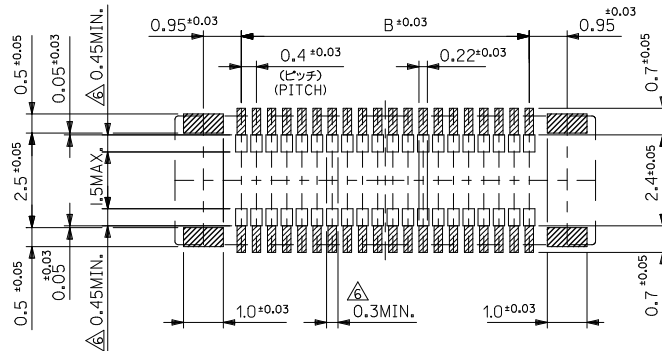

参考基板レイアウト (マウント面)
P.W. BOARD PATTERN DIMENSION (REFERENCE)
(MOUNTING AREA)

注記 NOTES:

1. 使用材料 MATERIAL
ハウジング: 液晶ポリマー (LCP) ガラス充填 UL94V-0 (黒)
HOUSING: LIQUID CRYSTAL POLYMER (GLASS FILLED)
UL94V-0 (COLOR: BLACK)
ターミナル: リン青銅 (t=0.15)
TERMINAL: PHOSPHOR BRONZE (t=0.15)
金具: リン青銅 (t=0.15)
FITTING NAIL: PHOSPHOR BRONZE (t=0.15)
 2. メッキ仕様 PLATING
ターミナル TERMINAL
金メッキ 0.2 マイクロメートル以上 (コンタクト部)
GOLD 0.2 MICROMETER MINIMUM (CONTACT AREA)
金メッキ 0.4 マイクロメートル以上 (テール部)
GOLD 0.4 MICROMETER MINIMUM (TAIL AREA)
下地メッキ: ニッケルメッキ 1.5 マイクロメートル以上
UNDER PLATING: NICKEL 1.5 MICROMETER MINIMUM
* コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.
金具 FITTING NAIL
鍍メッキ 1.0 マイクロメートル以上
TIN PLATING 1.0 MICROMETER MINIMUM
下地メッキ: ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING: NICKEL 1.0 MICROMETER MINIMUM
- △ (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.
4. 嵌合相手: 55909シリーズ
MATE WITH: 55909 SERIES.
 5. テール平坦度は、0.08以下
TAIL COPLANARITY TO BE 0.08 MAXIMUM
テール及び金具の平坦度は、0.1以下
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM
- △ 同一回路以外のパターン書き込み禁止範囲を示す。
NO PRINT CIRCUIT AREA OTHER THAN THE SAME CIRCUIT.
7. 本製品は 51338-***3 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***3.
 8. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT


REVISED	EC NO. J2010-2586		2010/06/24		DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		CONNECTOR SERIES NO.: 51338-***9		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		
	B	DRWN: YON002		2010/06/29		10 UNDER	± 0.2	DRAWN BY Y. NUKANOBU		DATE 2010/01/25		TITLE 0.4 B-T0-B REC ASSY HGT=1.5 J-BEND TAIL						
		CHKD: S. MARIYAMA		2010/06/29		10 OVER 30 UNDER	± 0.25	CHECKED BY S. MARIYAMA		DATE 2010/01/25								
		APPR: M. SASAO		2010/06/29		30 OVER	± 0.3	APPROVED BY M. SASAO		DATE 2010/01/25								
REV						ANGULAR ± 3 °		MATERIAL NO. SEE SHEET 1		DOCUMENT NO. SD-51338-005		SHEET NO. 2 OF 2						
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

10 9 8 7 6 5 4 3 2 1

CONFIDENTIAL

NOTES

- 製品詳細寸法については、SD-51338-005 を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING SD-51338-005.
- 梱包数量 : 2500個/リール
NUMBER OF CONNECTORS : 2500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

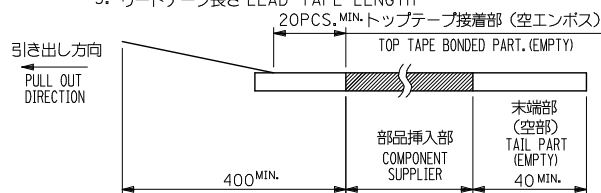

4. 材料


キャリアテープ : PS
トップテープ : PS, OTHER
リール : PS<リサイクル材を含む>

MATERIAL

CARRIER TAPE : PS
TOP TAPE : PS, OTHER
REEL : PS <RECYCLE MATERIAL CONTAINED>


5. ELV 及び RoHS 適合品。

ELV AND RoHS COMPLIANT.

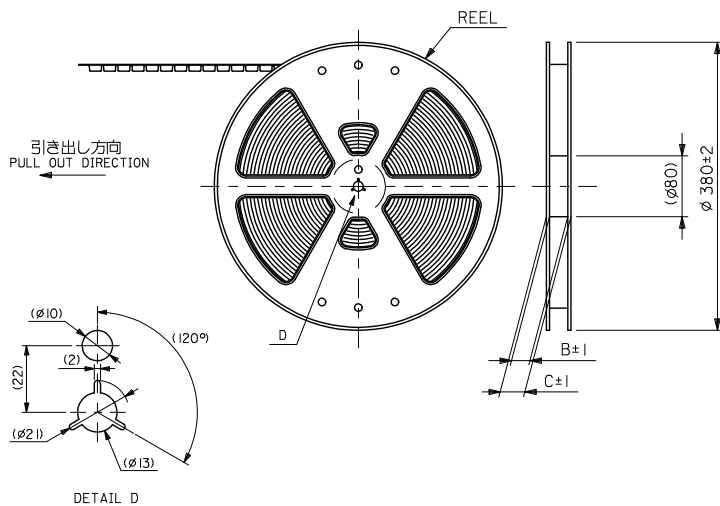

REVISED	EC NO: 12015-0987 DRAWN BY: YAHARA CHKD BY: TANAKA03 APPR: KNOB/KAWA 2015/01/27 2015/09/07 2015/09/11	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		MODEL NO. SD-51338-006		THIRD ANGLE PROJECTION				
			0.25 UNDER	UNDER	± 0.03	DRAWN BY	DATE	TITLE										
			0.25 OVER	0.5 UNDER	± 0.05	YON002	2010/06/23	0.4 B-TO-B CONN. REC HSG ASSY(HGT=1.5) EMBSTP PKG										
			0.5 OVER	1.0 UNDER	± 0.1	CHECKED BY		DATE										
			1.0 OVER	1.0 UNDER	± 0.2	APPROVED BY		DATE										
			10 OVER	30 UNDER	± 0.25	MSASAO		2010/06/29										
			30 OVER		± 0.3	MATERIAL NO.		DOCUMENT NO.										
			ANGULAR	± 3 °		SEE CHART												
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											SHEET NO. 1 OF 2				
			SIZE A3											THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

CONFIDENTIAL

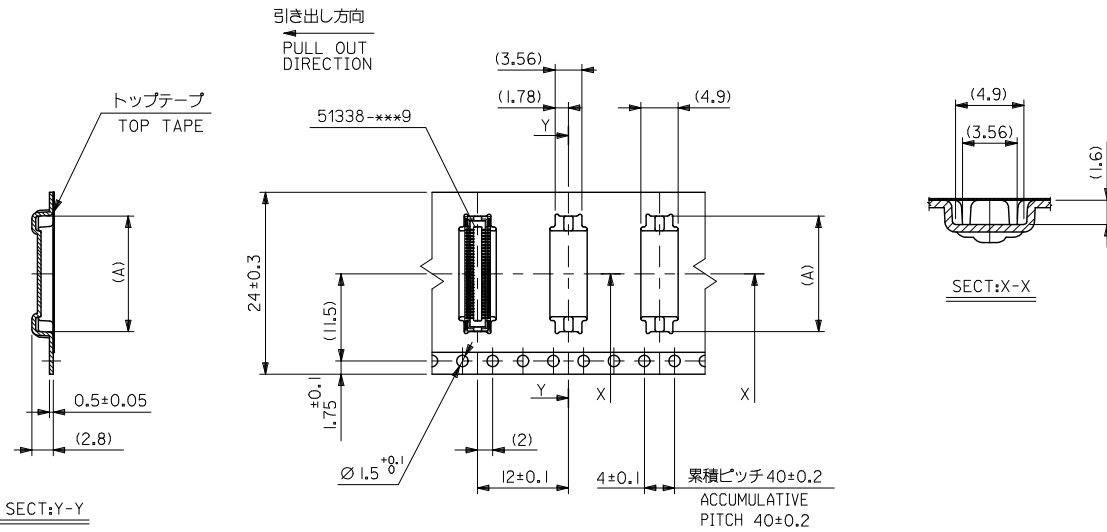

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

注記) 製品がポケット内に問題なく納まること。
NOTE. Pocket should contain product smoothly.

24	29.4	25.4	16.06	51338-6473	64
			14.06	51338-5473	54
			12.06	51338-4473	44
			5.26	51338-9873	10
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	オーダー番号 ORDER NO.	極数 CIRCUITS

REVISED EC NO. J2015-0987 DRAWN BY YAHARA CHKD KATAOKA APPR. MORIKAWA REV DESCRIPTION A	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
	0.25	UNDER	UNDER	±0.03	DRAWN BY	DATE	TITLE 0.4 B-TO-B CONN. REC HSG ASSY(HGT=1.5) EMBSTP PKG			
	0.25	OVER	0.5	UNDER	±0.05	YON002				2010/06/23
	0.5	OVER	1.0	UNDER	±0.1	CHECKED BY	DATE	molex		
	1.0	OVER	10	UNDER	±0.2	APPROVED BY	DATE			
	10	OVER	30	UNDER	±0.25	MSASAO	2010/06/29			
	30	OVER		±0.3	MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
	ANGULAR		±3 °		SEE CHART		SD-51338-006		2 OF 2	
REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		