

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1120380028](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



The BradControl™ IP67 I/O modules provide a reliable solution for connecting industrial controllers to I/O devices in harsh environments.

22 Apr. 10
DW200584

PROFIBUS® Discrete I/O Modules

IP67 Classic 60mm Format

Features

- **NEW module version! 8 inputs + 8 universal (inputs or outputs)**
- **Classic design allows space savings for direct machine mount applications**
- **Standard M12 threaded connectors or BradConnectivity Ultra-Lock connection system**
- **Standard hole pattern allows for interchangeability with popular I/O modules**
- **Supports PNP and NPN inputs**
- **Choose from several I/O configurations**
- **Visible diagnostics through status LEDs**
- **Module and channel diagnostics supported through PROFIBUS**
- **Supports PROFIBUS Slave DP-V0 in accordance with EN 50170**


Typical Applications

- **Machine tool industry**
- **Material handling systems**
- **Filling & packaging**
- **Steel industry**



I/O Systems for Harsh Environments

The BradControl™ Classic 60mm I/O modules for PROFIBUS® provide a reliable solution for connecting industrial controllers to I/O devices in harsh environments.

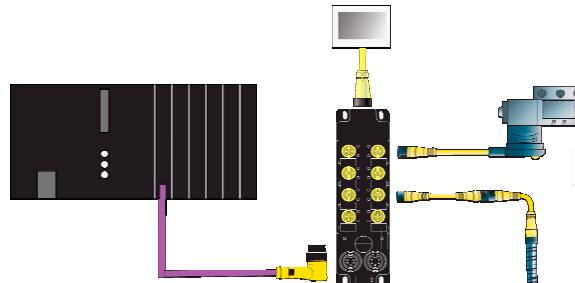

Contained in a 60mm wide housing rated for IP67 environments, BradControl I/O modules can be machine mounted and are able to withstand areas where liquids, dust or vibration may be present. This makes them ideally suited for many applications including material handling equipment and automated assembly machinery.

To facilitate input and output device wiring BradControl Classic 60mm I/O modules accept standard threaded M12 connectors or BradConnectivity™'s new Ultra-Lock™ connection system, a "push-to-lock" method that provides a fast, simple and secure connection between the I/O module and I/O devices. With the BradConnectivity Ultra-Lock connection system, performance and reliability are designed right into the connector! The unique radial seal design provides a reliable, operator independent seal each and every time. There's no chance for under - or over-tightening. When you hear and feel the connector click, you know it's locked in - there's no guesswork.

Other features include the support of both PNP and NPN inputs and current sourcing outputs. Built-in diagnostic tools include the highly visible LEDs which provide maintenance personnel with the ability to easily determine I/O, module and network status.

PROFIBUS specific features include support of module and channel diagnostics through PROFIBUS and PROFIBUS Slave DP-V0 in accordance with EN 50170.

PROFIBUS® I/O Module



LED Indicators

PROFIBUS Network Status (NET):

Green – running

Red – device not configured

I/O Module Diagnostics (MOD):

Off – no fault

Red – fault

Module & Input Power (I):

Green – external supply present


Output Power (O):

Green – external supply present

Input / Output (M12: 1A to 8B):

Green – input / output on

Red – input / output fault

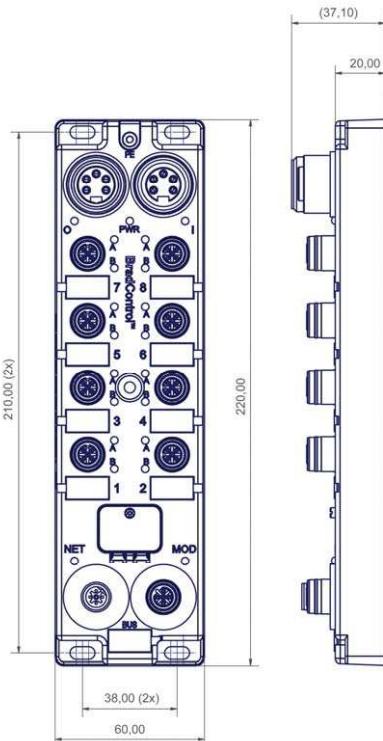

Technical Information

I/O Configurations	16 inputs 14 inputs + 2 outputs 12 inputs + 4 outputs 8 inputs + 8 outputs 8 inputs + 8 configurable (inputs or outputs)
I/O Connectors	5-pole female M12 BradConnectivity™ Ultra-Lock™ . Allows 2 input or 2 output channels per connector.
Bus Connectors	Bus in : male reverse-key M12 5-pole, B-Coded Bus out : female reverse-key M12 5-pole, B-Coded
Power Connectors	Power in : male Mini-Change® 5-pole Power out : female Mini-Change 5-pole
External Power Requirements	Module & input power : 24 Vdc, device current + module Output power : 24 Vdc (13 to 28 V), 8A max per module
Baud Rate Settings	Auto baud, All PROFIBUS® baud rates up to 12 MBaud
Address Settings	1 – 99 by rotary switches, (0 = factory default of 126) or 1 – 125 by Set_Slave_Address command
Input Type	Compatible with dry contact and PNP or NPN 3-wire switches. Electronic short circuit protection
Input Delay	0.5 ms
Input Device Supply	140 mA per port at 25°C
Output Load Current	Max 2.0 A per channel, electronic short circuit protection
Maximum Switching Frequency	200 Hz
Housing Dimensions	60mm x 220mm x 20mm (2.36 x 8.66 x .78 inches)
Mounting Dimensions	37.5 mm (1.48 inches) horizontal on centers 210 mm (8.27 inches) vertical on centers Center hole
Operating Temperature	-25°C to 70°C (-13°F to 158°F)
Storage Temperature	-25°C to 90°C (-13°F to 194°F)
RH Operating	5 to 95% non-condensing
EMC	IEC 61000-6-2
Protection	IP67 according to IEC 60529
Vibration	IEC 60068-2-6 conformance
Shock	10G, 11ms, 3 axis
Input Signal Voltage	"0": -0.2 ↔ 5 Volts / "1": 10 ↔ 28 Volts
Output Voltage	Supply value less 1 Volt.
Approvals	CE, UL, CUL, PNO certification


Ordering Information





Part Number	SAP Number	Product Description
TCDPB-8D0N-B1U	1120380030	8 Port M12 – 16 inputs NPN
TCDPB-8C2N-B1U	1120380028	8 Port M12 – 14 inputs NPN + 2 sourcing outputs
TCDPB-8B4N-B1U	1120380026	8 Port M12 – 12 inputs NPN + 4 sourcing outputs
TCDPB-888N-B1U	1120380024	8 Port M12 – 8 inputs NPN + 8 sourcing outputs
TCDPB-8D0P-B1U	1120380031	8 Port M12 – 16 inputs PNP
TCDPB-8C2P-B1U	1120380029	8 Port M12 – 14 inputs PNP + 2 sourcing outputs
TCDPB-8B4P-B1U	1120380027	8 Port M12 – 12 inputs PNP + 4 sourcing outputs
TCDPB-888P-B1U	1120380025	8 Port M12 – 8 inputs PNP + 8 sourcing outputs
TCDPB-88UP-B1U	1120385004	8 Port M12 – 8 inputs PNP + 8 I/O configurable

To contact us: www.woodhead.com

North America: US: +1 (630) 969-4550 – Canada: +1 519 725 5136
 Europe: France: +33 2 32 96 04 20 – Germany: +49 7252 94 96 0 – Italy: +39 (02) 950551 – UK: +44 (1252) 720720
 Asia: China: +86 21-5048-0889 Singapore: +65 6-268-6868 – Japan: +81 46-265-2325 – Korea: +82 31-492-9000



Brad is a registered trademark and BradControl, BradCommunications, appicom, Direct-Link and SST are trademarks of Molex Incorporated. © 2010 Molex

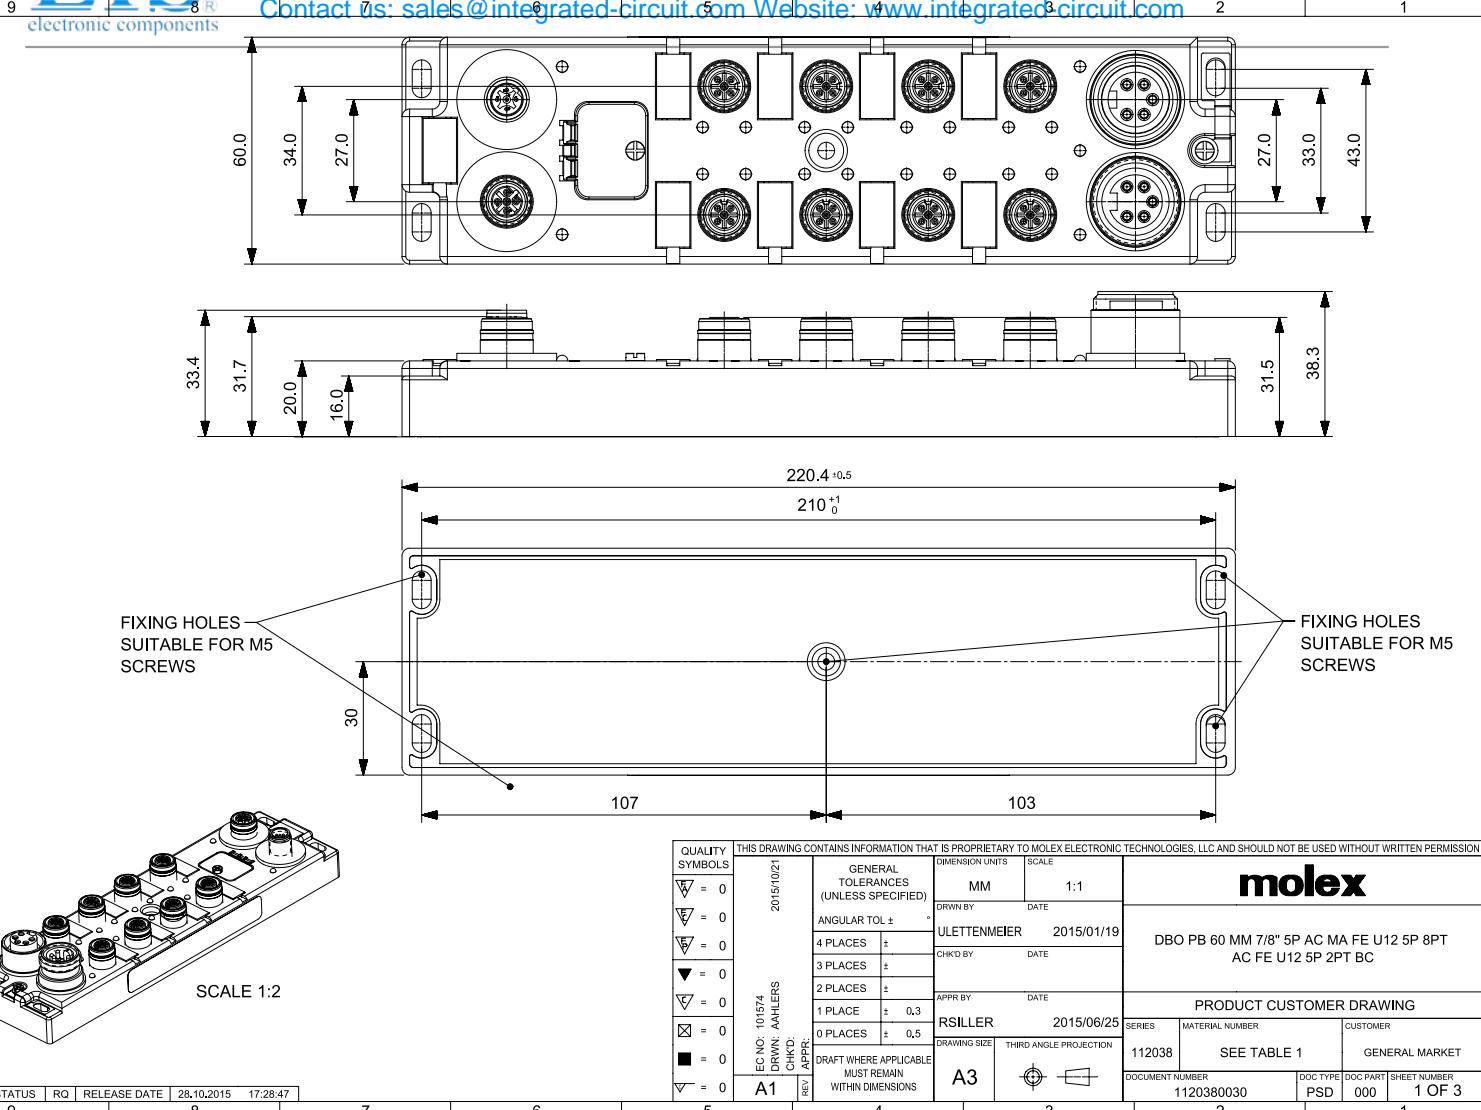


9	8	7	6	5	4	3	2	1
 electronic components	Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com							
BUS IN: 1x MALE M12 5P B-CODE	BUS OUT: 1x FEMALE M12 5P B-CODE	INPUTS / OUTPUTS: 8x FEMALE M12 5P A-CODE	POWER IN MALE 7/8" 5PIN	POWER OUT FEMALE 7/8" 5PIN				
								
SCALE 1:1 P1 P2 P3 P4 2 3 PE	SCALE 1:1 P1 P2 P3 P4 5 6 7	SCALE 1:1 P1 8 9 10 11 P5 P2 P3	SCALE 1:1 P1 14 P2 12 P3 13 P4 1 P5 15 P2 16 P1 17 P4					
WIRING INFORMATION 1 - +5 VDC (Bus Power) 2 - Bus A 3 - 0 V (Ground) 4 - Bus B 5 - NC	WIRING INFORMATION 1 - +5 VDC (Bus Power) 2 - Bus A 3 - 0 V (Ground) 4 - Bus B 5 - NC	WIRING INFORMATION P1 - +24 VDC P2 - B Input / Output P3 - 0 V (Ground) P4 - A Input / Output P5 - PE (Protected Earth)	WIRING INFORMATION P1 - 0 V (Ground) P2 - 0 V (Ground) P3 - PE (Protected Earth) P4 - 24 VDC (Module and Inputs Power) P5 - 24 VDC (Outputs Power)					

BILL OF MATERIAL

ITEM	DESCRIPTION	MATERIAL	FINISH
1	INSERT	TPU	BLACK
2	CONTACT	COPPER ALLOY	NICKEL PLATED
3	SHELL	BRASS	NICKEL PLATED
4	INSERT	TPU	BLACK
5	GASKET	FPM	RED
6	CONTACT	COPPER ALLOY	NI AU
7	SHELL	BRASS	NI
8	INSERT	TPU	BLACK
9	CONTACT	COPPER ALLOY	NI AU
10	GASKET	FPM	RED
11	SHELL	BRASS	NI
12	INSERT	TPE	YELLOW
13	CONTACT	COPPER ALLOY	NI AU
14	SHELL	BRASS	NI
15	INSERT	TPE	YELLOW
16	CONTACT	COPPER ALLOY	NI AU
17	SHELL	BRASS	NI
18	HOUSING	PBT	BLACK
19	WINDOW	PC	TRANSPARENT
20	SCREW	V2A	V2A
21	LABEL	PC	WHITE
22	FIBER OPTIC	PA	TRANSPARENT
23	WASHER	BRASS	NI
24	SCREW	V2A	V2A
25	SHIELD PLATE	STAINLESS STEEL	STAINLESS STEEL
26	RESIN	EPOXY	TRANSPARENT
27	LABEL	PVC	WHITE
28	LABEL	PVC	YELLOW

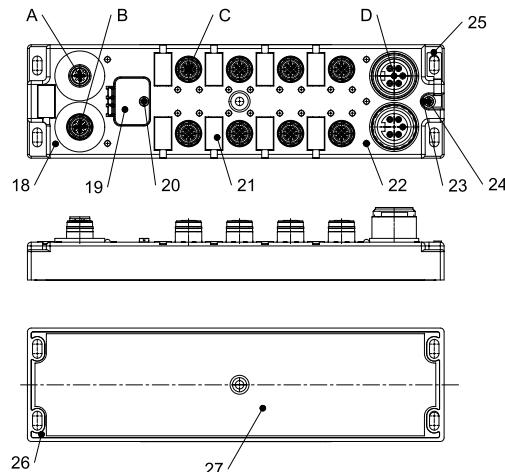

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	2015/01/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE		
▽ = 0		▽ = 0	ANGULAR TOL. \pm				
▽ = 0	▽ = 0	4 PLACES \pm	DRAWN BY	DATE	DBO PB 60 MM 7/8" 5P AC MA FE U12 5P 8PT AC FE U12 5P 2PT BC		
▽ = 0	▽ = 0	3 PLACES \pm	ULETTENMEIER	2015/01/19			
▽ = 0	▽ = 0	2 PLACES \pm	CHKD BY	DATE			
▽ = 0	▽ = 0	1 PLACE \pm 0.3	APPR BY	DATE	PRODUCT CUSTOMER DRAWING		
ECN: 101574	DRWNR: AHLIERS	RSILLER	2015/06/25				
CHKD	APPR	DRAWING SIZE	THIRD ANGLE PROJECTION	SERIES	MATERIAL NUMBER	CUSTOMER	
0 PLACES \pm 0.5	DRAFT WHERE APPLICABLE	A3					
■ = 0	MUST REMAIN WITHIN DIMENSIONS			112038	SEE TABLE 1		
▽ = 0	A1	REV: Aper	DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER	
			1120380030	PSD	000	2 OF 3	

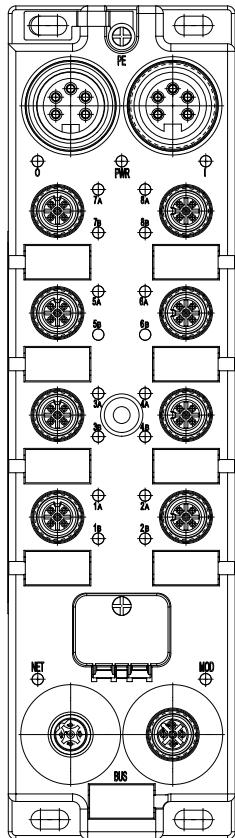

UNIVERSAL PRINTING

TABLE 1 UNIVERSAL PRINTING					
POWER TYPE		INPUT / OUTPUT	ENG.NO.	MOLEX P/N	3D MODEL NO.
7/8" 5 POLE	NPN	16I	TCDPB-8D0N-B1U	1120380030	
		14I / 20	TCDPB-8C2N-B1U	1120380028	
		12I / 40	TCDPB-8B4N-B1U	1120380026	
		8I / 80	TCDPB-888N-B1U	1120380024	
	USER CONFIG.	TCDPB-8YYX-B1U	1120385005	1120380030 (PDM)	
	PNP	16I	TCDPB-8D0P-B1U	1120380031	
		14I / 20	TCDPB-8C2P-B1U	1120380029	
		12I / 40	TCDPB-8B4P-B1U	1120380027	
		8I / 80	TCDPB-888P-B1U	1120380025	

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
 = 0  = 0  = 0  = 0  = 0  = 0  = 0  = 0		2015/10/21		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	
				ANGULAR TOL. \pm		SCALE	
				MM		1:1	
				DRAWN BY		DATE	
				ULETLENMEIER		2015/01/19	
		4 PLACES \pm		CHK'D BY		DATE	
		3 PLACES \pm					
		2 PLACES \pm					
		1 PLACE \pm 0,3		APPR BY		DATE	
		0 PLACES \pm 0,5		RSILLER		2015/06/25	
ECN: 101574 DRWN: AHAHLERS CHK'D: APR/15 A1 REV: 0		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION	
				A3		 	
PRODUCT CUSTOMER DRAWING							
SERIES		MATERIAL NUMBER		CUSTOMER			
112038		SEE TABLE 1		GENERAL MARKET			
DOCUMENT NUMBER		1120380030		DOC TYPE		DOC PART	SHEET NUMBER
				PSD		000	3 OF 3
5	4	3	2	1			