

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)  
[0008580652](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

NOTES:

1. MATERIAL: PHOSPHOR BRONZE
2. FINISH: PER ES-88  
102-TIN: .000200 MICROINCHES MIN OVER COPPER  
501-GOLD: .000020 MICROINCHES MIN OVER NICKEL  
THE PRIMARY SHIPPING CARTON WILL BE LABELED  
"COMPLIANT TO RoHS DIRECTIVE 2002/95/EC & ELV  
ANNEX II OF DIRECTIVE 2003/53/EC\*. CARTONS W/O  
THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD  
IN THE PC TAIL AREA.
3. PRODUCT SPECIFICATION & PROCESSING PARAMETERS: NONE.
4. DIMENSIONS GIVEN ARE BEFORE PLATING.
5. SOLDERABILITY SPECIFICATION: SMES-152 AFTER PLATING.
6. CAMBER SPECIFICATION: .003 MM/MM OR .003 IN/IN.
7. BURR SPECIFICATION ES-151.
8. RECOMMENDED PCB HOLE SPECIFICATION FOR PRESS FIT PINS:  
.062 THK. PCB  
PUNCHED HOLES: .030±.002/.762±0.05  
DRILLED HOLES: .031±.0015/.0787±0.038  
PLATED THRU HOLES: .0295±.0025/.749±0.064

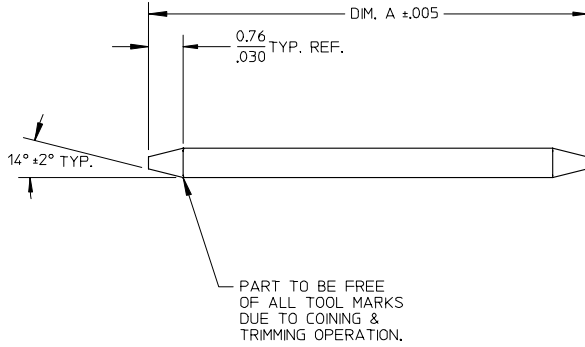

33	26.21 1.032		
31	31.75 1.250	74	31.24 1.230
30	30.48 1.200	69	20.85 .821
27	21.39 .842	68	18.29 .720
25	9.65 .380	67	16.94 .667
22	15.88 .625	66	15.49 .610
20	20.32 .800	65	14.61 .575
18	11.71 .461	64	13.08 .515
17	11.99 .472	60	10.01 .394
15	12.70 .500	58	8.56 .337
12	22.23 .875	47	19.69 .775
11	16.51 .650	46	17.86 .703
10	28.58 1.125	43	38.10 1.500
9	18.69 .736	42	13.84 .545
8	25.40 1.000	41	29.21 1.150
7	14.99 .590	40	34.93 1.375
5	11.10 .437	39	24.38 .960
4	13.46 .530	38	27.00 1.063
3	17.45 .687	37	19.05 .750
2	10.29 .405	35	23.80 .937
1	14.22 .560	34	32.26 1.270

GEN.DOCS.	SHEETS 2-*	AJ
ANNOTATOR	SHEET 1	AJ
DOC. TYPE	SHEETS	REV.

EC NO: UCP2004-1675 DRWN: SCHAFER/2004/03/08 CHKD: 2004/03/11 APPR: YMARGULI/2004/03/17	QUALITY SYMBOLS DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 8:1 DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY															
		<table border="1"> <tr><th></th><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>2 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	DIMENSION STYLE MM/IN	TITLE TERMINAL PIN 0.64/.025 SQ. WIRE	
			mm	INCH																
		4 PLACES	± ---	± ---																
3 PLACES	± ---	± ---																		
2 PLACES	± ---	± ---																		
1 PLACE	± ---	± ---																		
ANGULAR ±1/2°	DRAWN BY SCHAFFER DATE 2004/03/01	MOLEX INCORPORATED																		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	APPROVED BY MARGULIS DATE 2004/03/05	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-4166-001	SHEET NO. 1 OF *																

tb\_frame\_A  
rev. B1 2000/08/01















