

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Molex Connector Corporation](#)
[0510480300](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

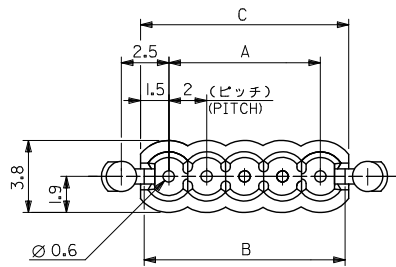


電線挿入図
SECT.(CABLE ASS'Y)




注記
NOTES

- 材料: ナイロン66, UL94V-2
MATERIAL: NYLON66, UL94V-2
- 適合電線: 2mmピッチリボンケーブル
AWG#26銅コート平行線
APPLICABLE WIRE: 2mm PITCH RIBBON CABLE WIRE
AWG#26, TOP COATED WIRE

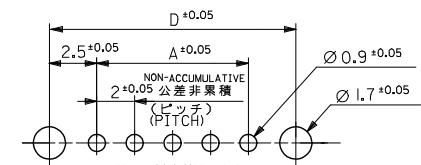

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.
(t=1.6+0.05)



適合電線推奨寸法
RECOMMENDED WIRE DIM.

37	35	34.6	32	51048-1700	17
35	33	32.6	30	-1600	16
33	31	30.6	28	-1500	15
31	29	28.6	26	-1400	14
29	27	26.6	24	-1300	13
27	25	24.6	22	-1200	12
25	23	22.6	20	-1100	11
23	21	20.6	18	-1000	10
21	19	18.6	16	-0900	9
19	17	16.6	14	-0800	8
17	15	14.6	12	-0700	7
15	13	12.6	10	-0600	6
13	11	10.6	8	-0500	5
11	9	8.6	6	-0400	4
9	7	6.6	4	-0300	3
7	5	4.6	2	51048-0200	2
D	C	B	A	ENG. NO.	極致 CKTS.

REVISED	2013/08/26	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	1/1	
	2013/08/26		10 UNDER	± 0.2	DRAWN BY T. ITOH	DATE	2.0 CABLE HOLDER (FOR 4.5 STRIP LENGTH)				
	2013/08/26		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '92/02/27					
	2013/08/26		30 OVER	± 0.3	APPROVED BY M. ENOMOTO	DATE '92/02/27					
	2013/08/26		ANGULAR	± 3 °	MATERIAL NO.		DOCUMENT NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51048-001		SHEET NO. 1 OF 1				
	SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
	REV		C								
	EC NO. J2014-0350										
	DRAWN: SATO02										
CHKD: KAKAWA											
APPR: NIKITA											