

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0522712779](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DWG. NO. SD-52271-036

E


D

C

B

A

1MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

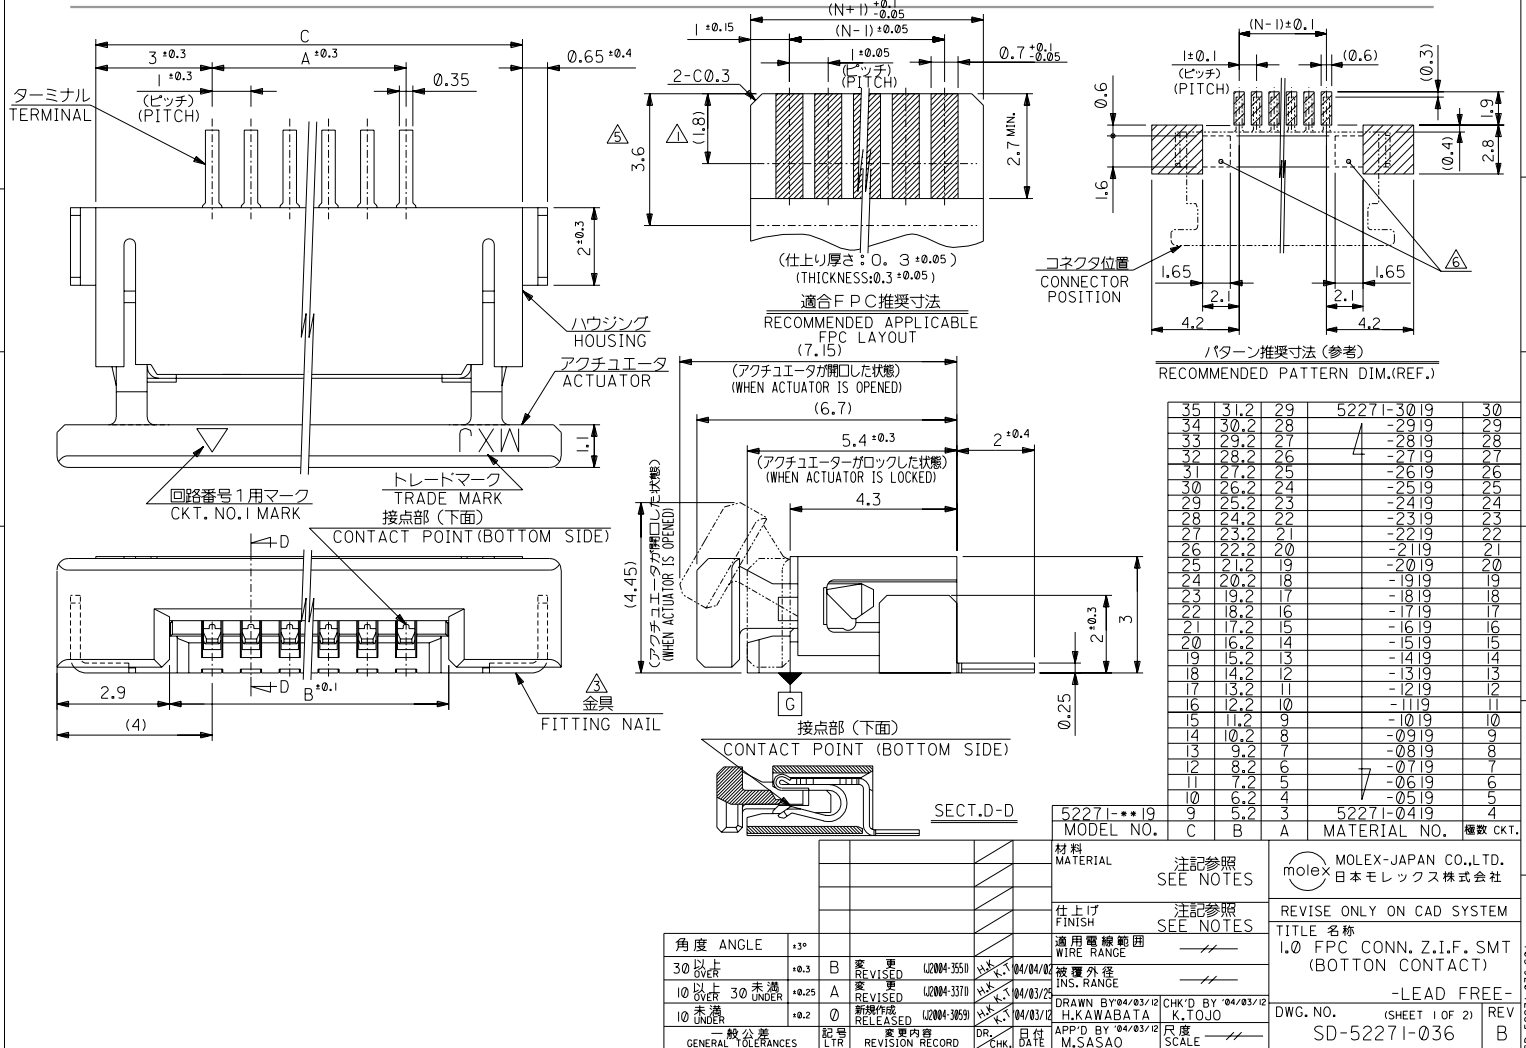

8

7

6

5

4

3

2

1

DWG. NO. SD-52271-036


E

D

C
DIMENSIONS IN METRIC DO NOT SCALE DRAWING

B

A

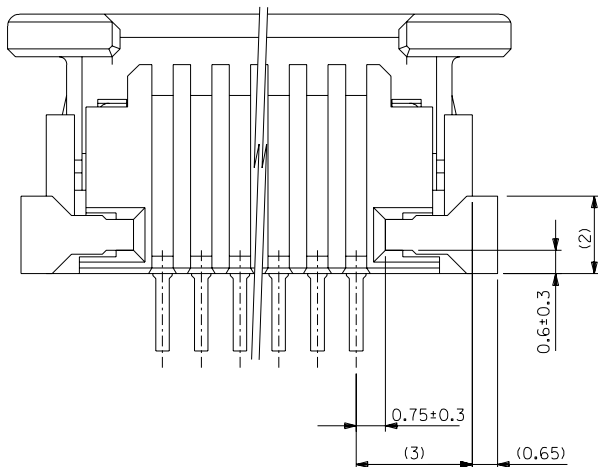

下面図

注記 NOTES

- △ 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン, UL 94V-0
HOUSING : 46NYLON, UL94V-0
アクチュエータ : PPS, UL 94V-0
ACTUATOR : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
TERMINAL : PHOS-BRO.(t=0.25)
メッキ : 銅ビスマズメッキ 1.0マイクログメートル以上
PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクログメートル以上
PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM
- 金具 : 銅合金 (t=0.25)
FITTING NAIL : COPPER ALLOY (t=0.25)
メッキ : 銅メッキ 1.0マイクログメートル以上
PLATING : TIN 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクログメートル以上
PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM
- △ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
4. エンボスタープ梱包時は、アクチュエータがロックした状態とする。
WHEN CONNECTOR IS SHIPPED, ACTUATOR SHOULD BE LOCKED.
- △ FPC挿入深さ。
INSERTION DEPTH OF FPC
- △ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.
7. 本製品は52271-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-17.

FPCについて:


打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。


ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION :FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL : POLYIMIDE
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

MODEL NO.				52271-**-19
材料 MATERIAL				注記参照 SEE NOTES
仕上げ FINISH				注記参照 SEE NOTES
適用電線範囲 WIRE RANGE				適用電線範囲 WIRE RANGE
被覆外径 INS. RANGE				被覆外径 INS. RANGE
DRAWN BY 04/03/12				CHK'D BY 04/03/12
H.KAWABATA				K.TOJO
APP'D BY 04/03/12				尺 度 SCALE
M.SASAO				尺 度 SCALE
角 度 ANGLE				±3°
30 以上 OVER				±0.3
10 以上 30 未満 UNDER				±0.25
10 未満 UNDER				±0.2
一般公差 GENERAL TOLERANCES				記号 LTR
REVISION RECORD				変更内容
DATE				DR. CHK. DATE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。

EN-01C(032)MXJ-32



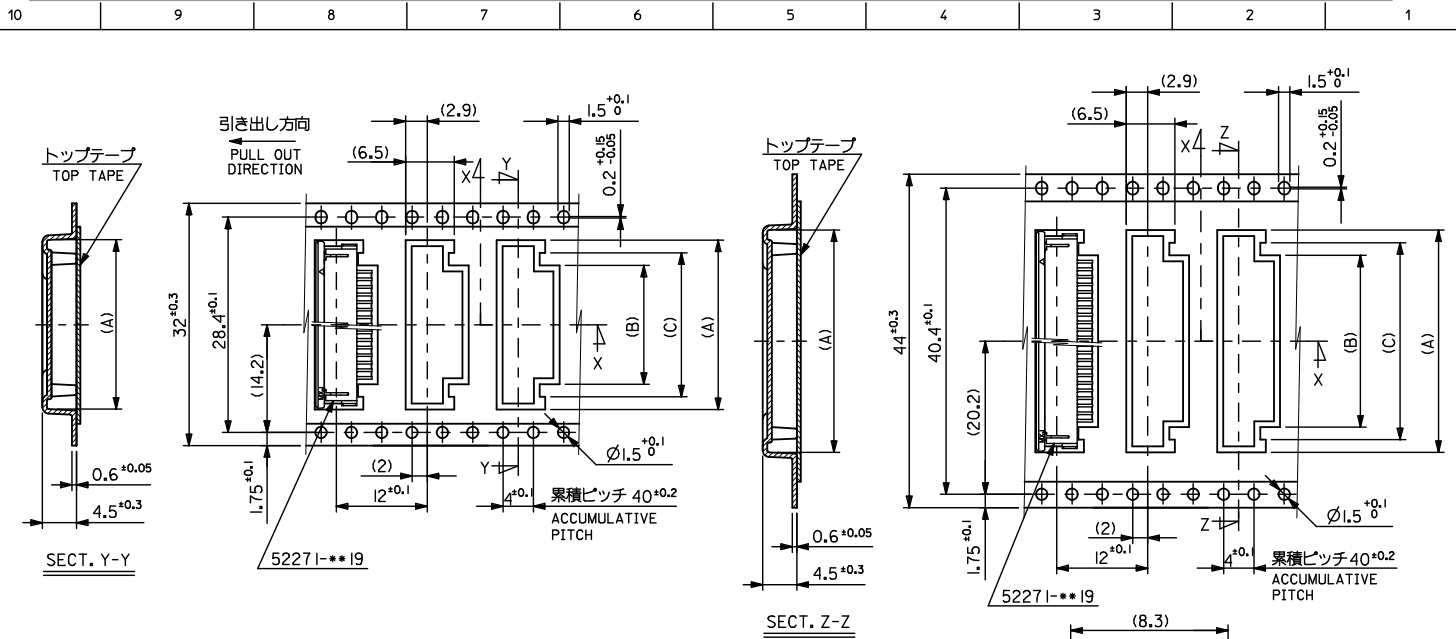

31	27.4	34.35	52271-2779	27
30	26.4	33.35	-2679	26
29	25.4	32.35	-2579	25
28	24.4	31.35	-2479	24
27	23.4	30.35	-2379	23
26	22.4	29.35	-2279	22
25	21.4	28.35	-2179	21
24	20.4	27.35	-2079	20
23	19.4	26.35	-1979	19
22	18.4	25.35	-1879	18
21	17.4	24.35	-1779	17
20	16.4	23.35	-1679	16
19	15.4	22.35	-1579	15
18	14.4	21.35	-1479	14
17	13.4	20.35	-1379	13
16	12.4	19.35	52271-1279	12

CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	電 庫
ib_frame_A3_ME_S							ckt.
Rev. E 2006/04/15							

REVISED EC NO. J2009-2061 DRAWN: KON CHK: CHIKO MATSUMOTO APPROV: NIKITA 2009/05/20 2009/05/21 2009/05/21	DESCRIPTION GENERAL TOLERANCES (UNLESS SPECIFIED) 10 UNDER 10 OVER 30 UNDER 30 OVER ANGULAR DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY H. KAWABATA CHECKED BY K. TOJO APPROVED BY M. SASAO MATERIAL NO. DATE 2004/03/12 2004/03/12 2004/03/12	SCALE --- DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE EMBOSSD TAPE PACKAGE FOR 52271-2779 -LEAD FREE- MOLEX INCORPORATED SD-52271-037	SHEET NO. 2 OF 3

