

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0528920896](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


CONFIDENTIAL

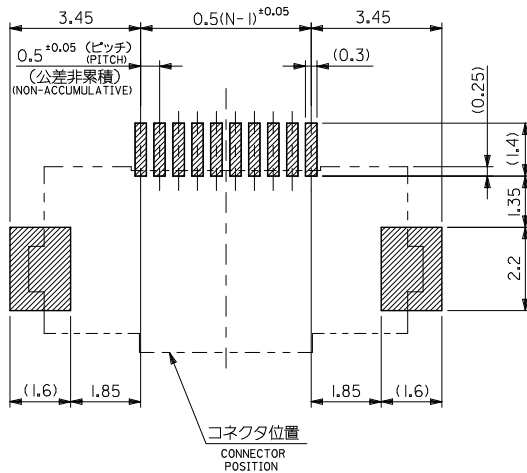


参考基板レイアウト
RECOMMENDED P.C. BOARD
PATTERN DIMENSION (REF.)
(マウント面)
(MOUNTING SIDE)

注記 NOTES

- △ R0.3は、FPCの導体部に力かからないこと。
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

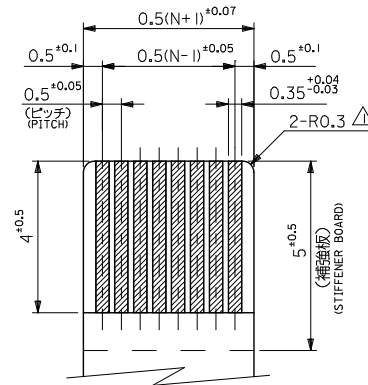

適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION
(仕上がり厚さ: 0.3±0.05)
(THICKNESS: 0.3±0.05)

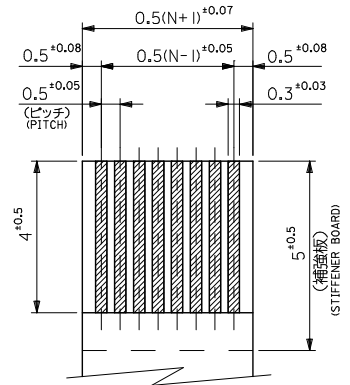

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
(仕上がり厚さ: 0.3±0.05)
(THICKNESS: 0.3±0.05)

2. FPCについて:

打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.


RECOMMENDED MATERIAL:

STIFFENER FILM: POLYIMIDE
BONDING AGENT: THERMOSETTING BONDING AGENT


REVISED		DESCRIPTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	MODEL NO.	52892-***59
EC NO.		DRAWN BY		DATE		MM ONLY		---	METRIC	THIRD ANGLE PROJECTION	
J2009-1091		M. UMEDA		2005/08/02		10 UNDER ±0.2		TITLE		0.5 FPC CONN ASSY ZIF SMT RA(BTM CONT) E/O	
J2008-1104		K. TOYODA		2005/08/02		10 OVER 30 UNDER ±0.25		APPROVED BY		MOLEX INCORPORATED	
J2008-1105		N. UKITA		2005/08/02		30 OVER ±0.3		MATERIAL NO.		SD-52892-042	
J2004-0402		SEE SHEET 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		ANGULAR ±3 °		DOCUMENT NO.		SHEET NO.	
J2004-0402		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		A3		2 OF 2		EN-02JA(021)	

注記 NOTES


- 製品詳細寸法については図面 SD-52892-042 を参照下さい。
RE DETAILED DIMENSION, SEE SD-52892-042
- 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

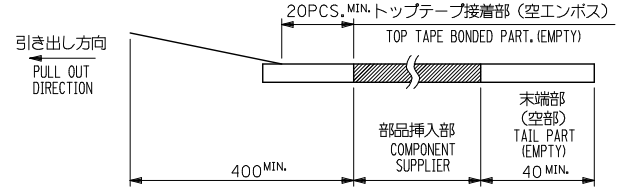

4. トップテープの剥離強度 : 0.1N - 1.3N (10gf-130gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE : 0.1N - 1.3N (10gf-130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.



5. 材料(MATERIAL)
キャリアテープ(CARRIER TAPE): ポリプロピレン(POLYPROPYLENE)
トップテープ(TOP TAPE): PET, PE, PEF
リール(REEL): ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
6. 本製品は、52892-**95 の金メッキ品である。
THIS PRODUCT IS GOLD PLATING OF 52892-**95.

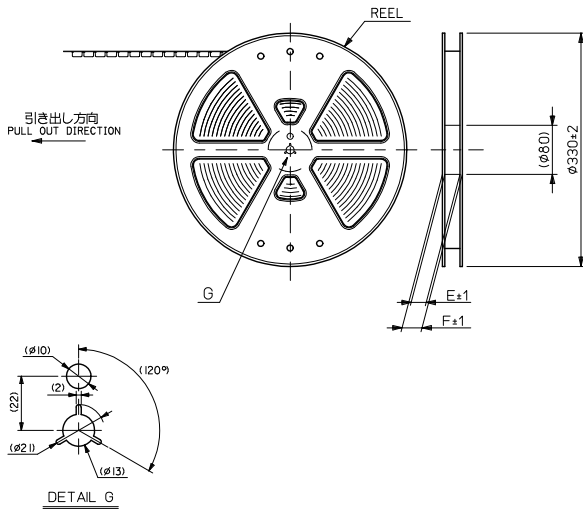

52892-**96				MODEL NO.	
DESIGN UNITS				THIRD ANGLE PROJECTION	
METRIC					
EMBOSSED TAPE PACKAGE FOR 52892-**59				MOLEX INCORPORATED	
MATERIAL NO.				DOCUMENT NO.	
SEE SHEET 2				SD-52892-043	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				SHEET NO.	
				1 OF 2	

