

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0559351130](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


10 9 8 7 6 5 4 3 2 1

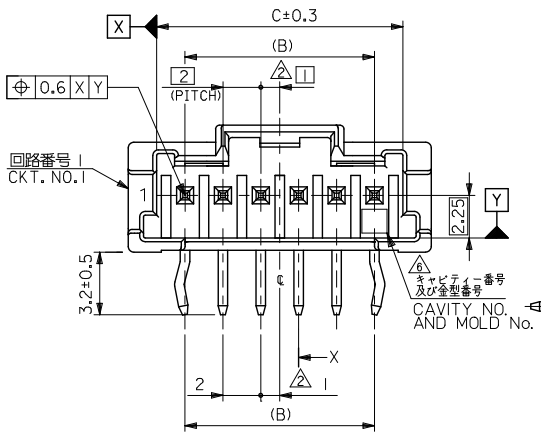

SECT. X-X



SECT. X-X

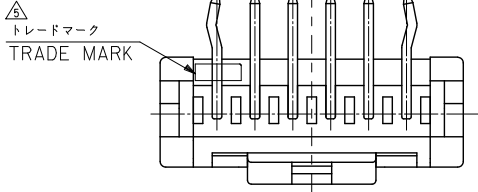


MATERIAL  
ピン : 黄銅、ニッケル下地鍍メッキ  
ハウジング : PBT

NOTE  
1. 嵌合相手 : 51382-\*\*\*\*  
△ 偶数極 (列) に適用。  
3. キンクは両外側の位置に付加。  
△ 製品番号 MATERIAL NO.  
55935-\*\*\*\*

極数 CIRCUIT SIZE

色 COLOR
30 自然色 (白) NATURAL (WHITE)
31 黒 BLACK
32 赤 RED
33 黄 YELLOW
34 青 BLUE
35 桃 PINK
36 緑 GREEN
37 茶 BROWN
38 橙 ORANGE
39 紫 VIOLET
51 灰 GRAY
53 蛍光黄 FLUORESCENT YELLOW
54 水 PALE BLUE
55 蛍光桃 FLUORESCENT PINK
56 黄緑 YELLOWISH GREEN
58 蛍光橙 FLUORESCENT ORANGE







△ キャビティ番号 : 1~2桁の数字  
金型番号 : アルファベット1文字にて構成  
(例 1A, 10B)  
尚、金型番号は刻印無しの商品あり。  
FORMED BY 1 DIGIT TO \* DIGIT  
NUMBERS (TO CAVITY No.)  
AND BY 1 LETTER OF ALPHABET.  
(TO MOLD No.)  
(e.g. 1A,10B)  
THERE ARE PRODUCTS WITHOUT  
THE MARK OF MOLD No.

31	28	34	55935-15**	15
29	26	32	55935-14**	14
27	24	30	55935-13**	13
25	22	28	55935-12**	12
23	20	26	55935-11**	11
21	18	24	55935-10**	10
19	16	22	55935-09**	9
17	14	20	55935-08**	8
15	12	18	55935-07**	7
13	10	16	55935-06**	6
11	8	14	55935-05**	5
9	6	12	55935-04**	4
7	4	10	55935-03**	3
5	2	8	55935-02**	2
C	B	A	MATERIAL NO. CKT.	


△ トレードマーク:Mプラス1~2文字のアルファベットにて構成。(例:MXJ)  
但し、\*JはJAPANを示す。  
FORMED BY M AND 1-2 MORE LETTER OF ALPHABET (e.g. MXJ) TO TRADE MARK. BUT \*J SHOW JAPAN.

REVISED IEC NO. J2010-2139 2010/04/26 DRAWN: HANYU CHIKDK ASAKAWA 2010/04/26 APPROX: MIKITA 2010/04/27 REV: K	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			MM ONLY	---	METRIC	◎ □	
	10 UNDER	± 0.2	DRAWN BY	DATE	TITLE	2.0 W/B SINGLE CONN. PLUG HOUSING ASS'Y R/A -LEAD FREE-	
	10 OVER 30 UNDER	± 0.25	T. NIITSU	'02/02/08		MOLEX INCORPORATED	
30 OVER	± 0.3	CHECKED BY	DATE		DOCUMENT NO.	SHEET NO.	
ANGULAR	± 3 °	K. ASAKAWA	'03/06/12		SD-55935-002	1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	SEE CHART			
		T. YAMAGUCHI	'03/06/12	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			


10 9 8 7 6 5 4 3 2 1




嵌合断面図



2 CIRCUIT



3 CIRCUIT



4 CIRCUIT 以上

REVISED EC NO. J2010-2139 DRAWN: HANYU 2010/04/26 CHIKDK ASAKAWA 2010/04/26 APPROVED: MIKITA 2010/04/27 DESCRIPTION REV. K	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	MODEL NO.: 55935-****
	10 UNDER	± 0.2	DRAWN BY T. NIITSU	DATE '02/02/08	TITLE 2.0 W/B SINGLE CONN. PLUG HOUSING ASS'Y R/A -LEAD FREE-		
	10 OVER 30 UNDER	± 0.25	CHECKED BY K. ASAKAWA	DATE '03/06/12	MOLEX INCORPORATED		
	30 OVER	± 0.3	APPROVED BY T. YAMAGUCHI	DATE '03/06/12	DOCUMENT NO. SD-55935-002		
ANGULAR ± 3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		SHEET NO. 2 OF 2	
SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							