

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Fairchild Semiconductor](#)
[74F534PC](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

FAIRCHILD
 SEMICONDUCTOR™

April 1988
 Revised October 2000

74F534

Octal D-Type Flip-Flop with 3-STATE Outputs

General Description

The 74F534 is a high speed, low-power octal D-type flip-flop featuring separate D-type inputs for each flip-flop and 3-STATE outputs for bus-oriented applications. A buffered Clock (CP) and Output Enable (\bar{OE}) are common to all flip-flops. The 74F534 is the same as the 74F374 except that the outputs are inverted.

Features


- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- 3-STATE outputs for bus-oriented applications

Ordering Code:


Order Number	Package Number	Package Description
74F534SC	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
74F534SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74F534PC	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbols

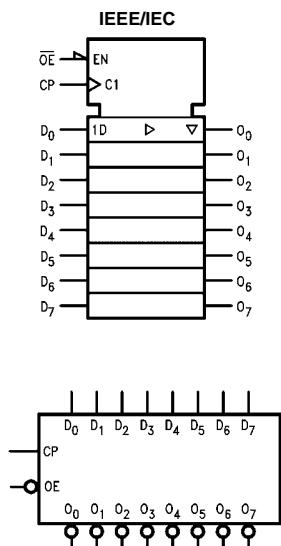

Connection Diagram



74F534 Octal D-Type Flip-Flop with 3-STATE Outputs

74F534

Unit Loading/Fan Out

Pin Names	Description	U.L.	Input I_{IH}/I_{IL}
		HIGH/LOW	Output I_{OH}/I_{OL}
D ₀ –D ₇	Data Inputs	1.0/1.0	20 μ A/-0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μ A/-0.6 mA
OE	3-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μ A/-0.6 mA
$\overline{O_0}$ – $\overline{O_7}$	Complementary 3-STATE Outputs	150/40(33.3)	-3 mA/24 mA (20 mA)

Function Table


Inputs			Output
CP	OE	D	\bar{O}
/	L	H	L
/	L	L	H
L	L	X	\bar{O}_0
X	H	X	Z

H = HIGH Voltage Level	L = LOW Voltage Level
X = Immaterial	Z = High Impedance
\nearrow = LOW-to-HIGH Clock Transition	
Q_n = Value stored from previous clock cycle	

Functional Description

The 74F534 consists of eight edge-triggered flip-flops with individual D-type inputs and 3-STATE complementary outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH clock (CP) transition. With the Output Enable (\overline{OE}) LOW, the contents of the eight flip-flops are available at the outputs. When the \overline{OE} is HIGH, the outputs go to the high impedance state. Operation of the \overline{OE} input does not affect the state of the flip-flops.

Logic Diagram

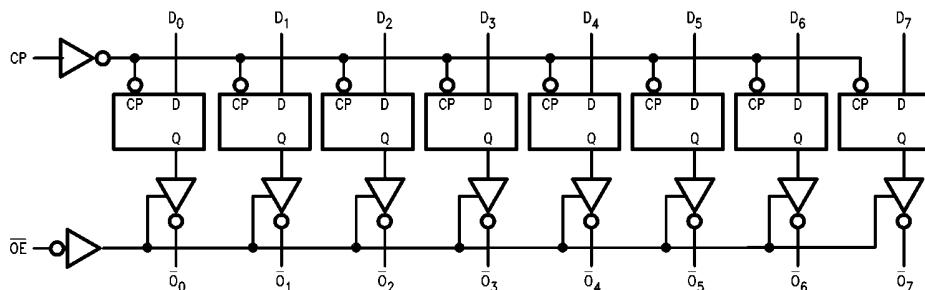

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

74F534

Absolute Maximum Ratings(Note 1)

Storage Temperature	-65°C to +150°C
Ambient Temperature under Bias	-55°C to +125°C
Junction Temperature under Bias	-55°C to +150°C
V_{CC} Pin Potential to Ground Pin	-0.5V to +7.0V
Input Voltage (Note 2)	-0.5V to +7.0V
Input Current (Note 2)	-30 mA to +5.0 mA
Voltage Applied to Output	
in HIGH State (with $V_{CC} = 0V$)	
Standard Output	-0.5V to V_{CC}
3-STATE Output	-0.5V to +5.5V
Current Applied to Output	
in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Recommended Operating Conditions

Free Air Ambient Temperature	0°C to +70°C
Supply Voltage	+4.5V to +5.5V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

DC Electrical Characteristics

Symbol	Parameter	Min	Typ	Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage			0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage			-1.2	V	Min	$I_{IN} = -18$ mA
V_{OH}	Output HIGH Voltage	10% V_{CC}	2.5		V	Min	$I_{OH} = -1$ mA
	10% V_{CC}	2.4					$I_{OH} = -3$ mA
	5% V_{CC}	2.7					$I_{OH} = -1$ mA
	5% V_{CC}	2.7					$I_{OH} = -3$ mA
V_{OL}	Output LOW Voltage	10% V_{CC}		0.5	V	Min	$I_{OL} = 24$ mA
I_{IH}	Input HIGH Current			5.0	μ A	Max	$V_{IN} = 2.7$ V
I_{BVI}	Input HIGH Current Breakdown Test			7.0	μ A	Max	$V_{IN} = 7.0$ V
I_{CEX}	Output HIGH Leakage Current			50	μ A	Max	$V_{OUT} = V_{CC}$
V_{ID}	Input Leakage Test	4.75			V	0.0	$I_{ID} = 1.9$ μ A All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current			3.75	μ A	0.0	$V_{OD} = 1.50$ μ A All Other Pins Grounded
I_{IL}	Input LOW Current			-0.6	mA	Max	$V_{IN} = 0.5$ V
I_{OZH}	Output Leakage Current			50	μ A	Max	$V_{OUT} = 2.7$ V
I_{OZL}	Output Leakage Current			-50	μ A	Max	$V_{OUT} = 0.5$ V
I_{OS}	Output Short-Circuit Current	-60		-150	mA	Max	$V_{OUT} = 0$ V
I_{ZZ}	Bus Drainage Test			500	μ A	0.0V	$V_{OUT} = 5.25$ V
I_{CCZ}	Power Supply Current		55	86	mA	Max	$V_O = \text{HIGH Z}$

74F534

AC Electrical Characteristics


Symbol	Parameter	$T_A = +25^\circ C$ $V_{CC} = +5.0V$ $C_L = 50 pF$			$T_A = -55^\circ C$ to $+125^\circ C$ $V_{CC} = +5.0V$ $C_L = 50 pF$			$T_A = 0^\circ C$ to $+70^\circ C$ $V_{CC} = +5.0V$ $C_L = 50 pF$			Units
		Min	Typ	Max	Min	Max	Min	Max	Min	Max	
t_{MAX}	Maximum Clock Frequency	100			60		70				MHz
t_{PLH}	Propagation Delay CP to \bar{Q}_n	4.0	6.5	8.5	4.0	10.5	4.0	10.0			ns
t_{PHL}		4.0	6.5	8.5	4.0	11.0	4.0	10.0			
t_{PZH}	Output Enable Time	2.0	9.0	11.5	2.0	14.0	2.0	12.5			
t_{PZL}		2.0	5.8	7.5	2.0	10.0	2.0	8.5			
t_{PHZ}	Output Disable Time	1.5	5.3	7.0	1.5	8.0	1.5	8.0			
t_{PLZ}		1.5	4.3	5.5	1.5	7.5	1.5	6.5			

AC Operating Requirements

Symbol	Parameter	$T_A = +25^\circ C$ $V_{CC} = +5.0V$			$T_A = -55^\circ C$ to $+125^\circ C$ $V_{CC} = +5.0V$			$T_A = 0^\circ C$ to $+70^\circ C$ $V_{CC} = +5.0V$			Units	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
$t_S(H)$	Setup Time, HIGH or LOW	2.0		2.0		2.0		2.0				
$t_S(L)$	D_n to CP	2.0		2.5		2.0		2.0				
$t_H(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0		2.0				
$t_H(L)$	D_n to CP	2.0		2.5		2.0		2.0				
$t_W(H)$	CP Pulse Width HIGH or LOW	7.0		7.0		7.0		7.0				
$t_W(L)$		6.0		6.0		6.0		6.0				

74F534


Physical Dimensions inches (millimeters) unless otherwise noted

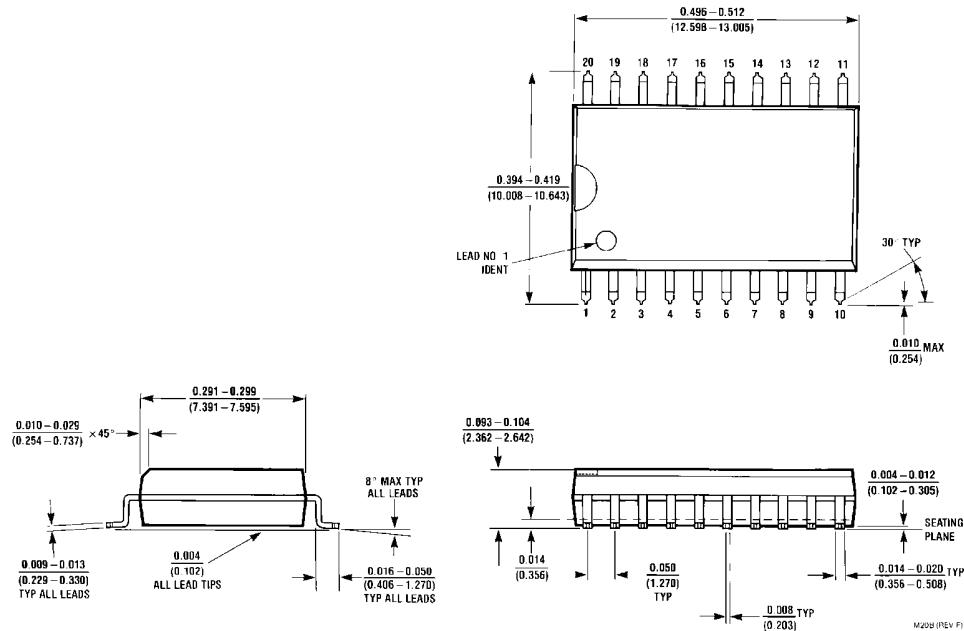


20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
Package Number M20B

74F534



Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

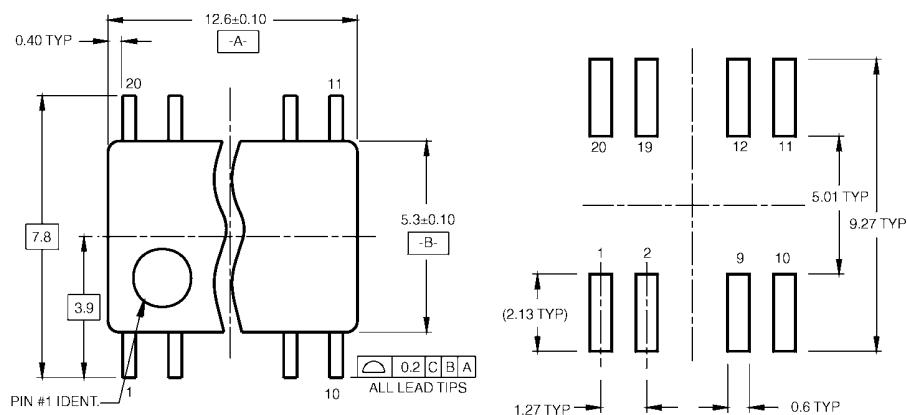

LAND PATTERN RECOMMENDATION

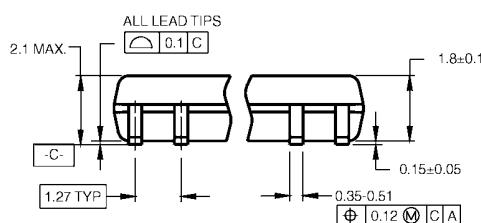

DIMENSIONS ARE IN MILLIMETERS

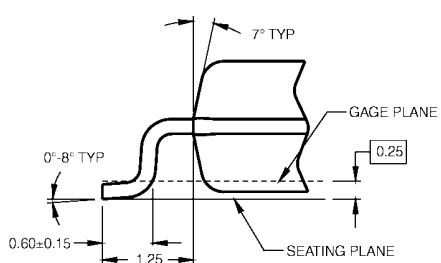

NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.


M20DRevB1

DETAIL A

**20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
Package Number M20D**

74F534 Octal D-Type Flip-Flop with 3-STATE Outputs

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

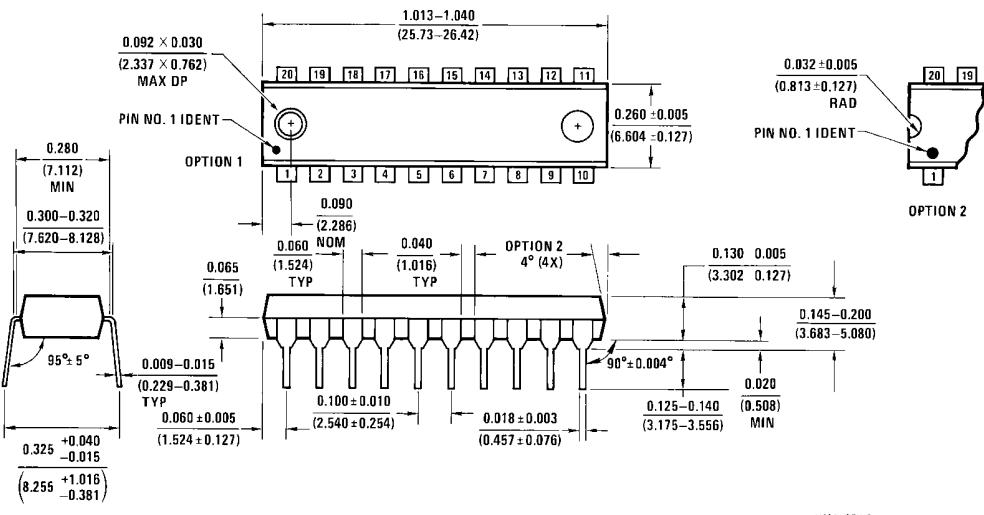

N20A (REV G)

20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide
Package Number N20A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com