

Excellent Integrated System Limited

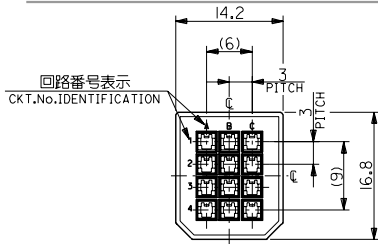


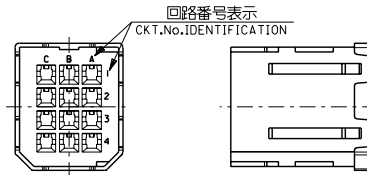
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0512341201](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

嵌合側
MATING SIDE電線挿入側
WIRE SIDE注記
NOTES

1. 材質
MATERIAL
ガラス入りPBT樹脂 UL94V-0 色:黒
HOUSING: PBT G.F. UL94V-0 COLOR: BLACK
2. 適用端子: 56116-8*90, 56117-8*90, 56118-8*90, 56119-8*90
APPLICABLE CRIMP PIN: 56116-8*90, 56117-8*90, 56118-8*90, 56119-8*90
3. 適用シエルボディ: 56380-1200
APPLICABLE SHELL BODY: 56380-1200
4. 適用シエルカバー: 56381-1200
APPLICABLE SHELL COVER: 56381-1200
5. 嵌合相手: 51238-121*
MEET WITH: 51238-121*

<誤嵌合防止キー(極性)タイプ> <POLARITY KEY TYPE>

51234-1201	51234-1202	51234-1203	51234-1204	51234-1205
STANDARD TYPE	A TYPE	B TYPE	C TYPE	D TYPE

A-2	D	51234-1205	51234-***	12
C-3	C	51234-1204		
B-3	B	51234-1203		
B-2	A	51234-1202		
—#—	STANDARD	51234-1201		
POLARITY POSITION (CIRCUIT No.)	POLARITY TYPE	MATERIAL No.	MODEL No.	CIRCUIT

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	REVISED 01/10/04 EC NO. J2002-0786 DRWN: SAKIYAMA CHK: JIMYAZAWA APPR: YOITO	RELEASED 01/02/09 EC NO. J2001-10440 DRWN: SAKIYAMA CHK: JIMYAZAWA APPR: HIKESUGI	MATERIAL 材料 注記参照 SEE NOTES	FINISH 仕上り —#—	WIRE RANGE 適用電線範囲 —#—	INS. RANGE 被覆外径 —#—	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS ☒ mm ☐ INCH	THIRD ANGLE PROJECTION ☒ THIRD ANGLE PROJECTION	TITLE: COMPACT ROBOT CONN. (CRC) PLUG PIN HSG	MOLEX INCORPORATED	MATERIAL NO. SEE CHART	DRAWING NO. SD-51234-004	SHEET NO. 1 OF 1	SIZE B	EN-02J(097) MXJ-54
8			7	6		5			4		3		2						