Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Molex Connector Corporation
0561949128

For any questions, you can email us directly:
sales@integrated-circuit.com

注記
NOTES

1. 材質
MATERIAL
銅合金 （板厚：0．3）
COPPER ALLOY (THICKNESS : 0.3)

2. メッキ仕様
TERMINAL PLATING
接点部 ： 金メッキ0.25 μmＭＩＮ。
CONTACT AREA : GOLD 0.25 μm MIN.
圧着部 ： 錫メッキ 1.0μm ＭＩＮ。
CRIMP AREA : TIN 1.0μm MIN.
下地メッキ ： ニッケルメッキ 1.27μm ＭＩＮ。
UNDER PLATE : NICKEL 1.27μm MIN.

3. 適用電線範囲：ＵＬ１０１５ ，ＡＷＧ #１８～１４
APPLICABLE WIRE RANGE : UL1015 , AWG #18～14

4. 被覆外径 ：φ3.8 MAX.
INSULATION EXTERNAL DIA : φ3.8 MAX.

5. 適用ハウジング： 51300-**** ，51301-****
APPLICABLE HOUSING : 51300-**** , 51301-****

6. 適用圧着工具（手動） ：57413-5300（適用電線：ＡＷＧ #１６～１４）
APPLICABLE CRIMP TOOL (HAND) : 57413-5300 (APPLICABLE WIRE AWG #16～14)
：57413-5400（適用電線：ＡＷＧ #１８）
: 57413-5400 (APPLICABLE WIRE AWG #18)

7. 本製品は 56194-9185 の鉛フリー品である．
THIS PRODUCT IS LEAD FREE OF 56194-9185.

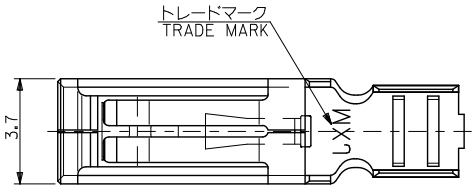





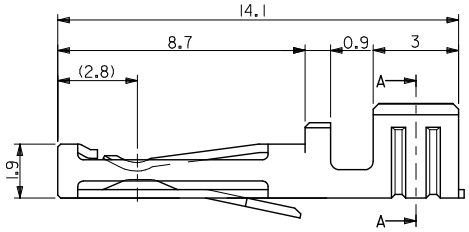

CHAIN	56194-9028	56194-9***
バラ状 LOOSE	56194-9128	
端子形状 TERMINAL CONFIGURATION	MATERIAL No.	MODEL NO.

RELEASED
EC NO: WNA2010-0098 2009/08/11
DRWN:TMOELLER
CHKD:JMURPHY
APPR:JFMURPHY 2009/08/14
DESCRIPTION
REV A

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	M.NABEI	DATE '07/10/30
CHECKED BY	M.ISOGAYA	DATE '07/10/30
APPROVED BY	N.UKITA	DATE '07/10/30
MATERIAL NO.	SEE TABLE	

TITLE
COMPACT ROBOT CONN.
POWER CRIMP SOCKET
-LEAD FREE-

molex MOLEX INCORPORATED

DOCUMENT NO. SD-56194-003
SHEET NO. 1 OF 1
SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION