

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0713089060](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

13 12 11 10 9 8 7 6 5 4 3 2 1

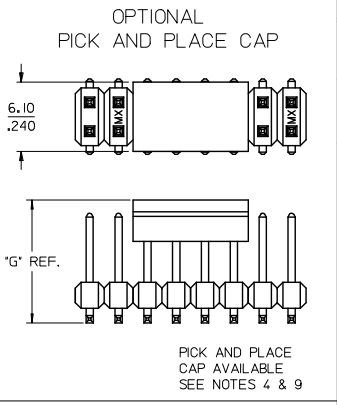

DIM "M"	DIM "G"
6.10 .240	10.67 .420
8.13 .320	12.70 .500

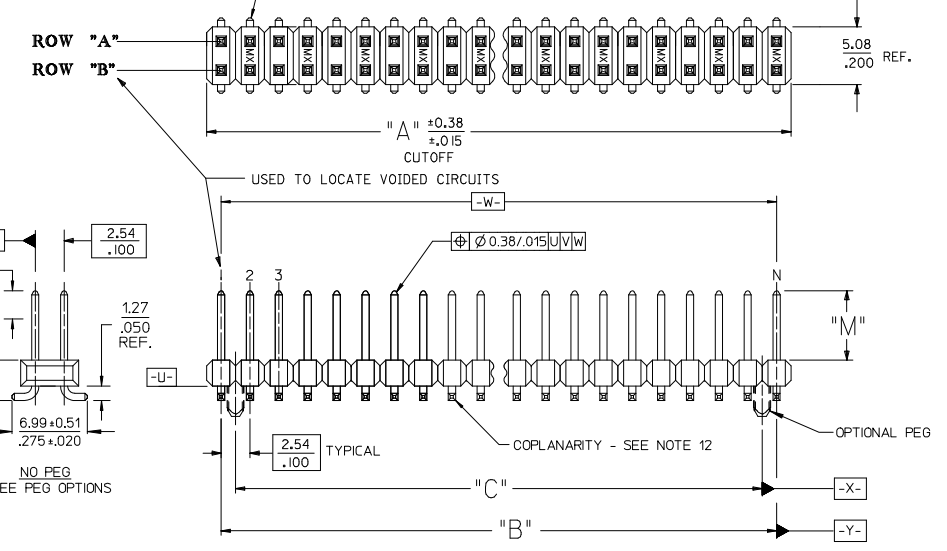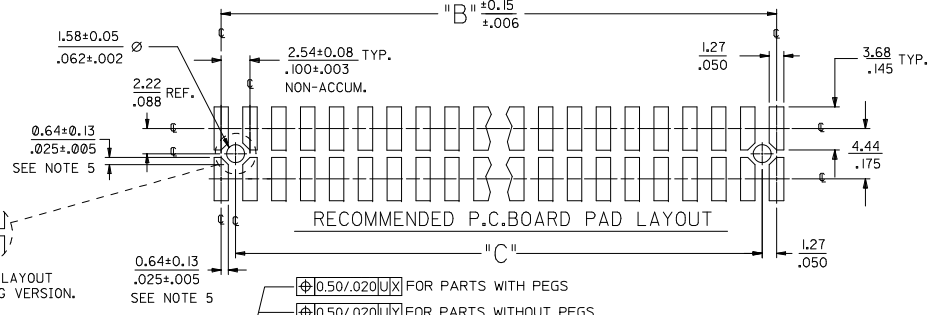


- NOTES:
- MATERIALS: INSULATOR: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL94 V-0, COLOR: BLACK  
TERMINAL: COPPER ALLOY
  - FINISH:  
TIN - 0.00381/0.000150 MINIMUM TIN OVER NICKEL OVER ALL  
15 GOLD - 0.00038/0.000015 MINIMUM GOLD IN SELECT AREA OVER 0.00191/0.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL  
30 GOLD - 0.00076/0.000030 MINIMUM GOLD IN SELECT AREA OVER 0.00191/0.000075 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL  
50 GOLD - 0.00127/0.000050 MINIMUM GOLD IN SELECT AREA OVER 0.00254/0.000100 MINIMUM TIN IN SELECT AREA OVER NICKEL OVERALL.
  - PART TO CONFORM TO PS-71308
  - PACKAGING (SEE CHARTS):  
BULK: PER PK-70873-0353.  
TUBES: PER PK-70873-0041.  
TUBES W/ VAC CAPS: PER PK-70873-0691.  
TAPE AND REEL W/ VAC CAPS: PER PK-70873-0805.  
SEE SHEET 3 FOR TAPE & REEL PRODUCT WITH SHALLOW POCKET REQUIREMENTS.
  - TYP. DIMENSIONS FOR LANDS SURROUNDING HOLES FOR RETENTION PEGS.
  - PIN SOLDERABILITY PER MOLEX SPEC. ES-152.
  - SEE SHEETS 2-5 FOR CHARTED DIMS., PART/EDP NO'S, AND VOIDED CIRCUITS.
  - PIN PUSHOUT FORCE: 3 POUNDS MINIMUM.
  - PICK-N-PLACE CAPS WILL BE PLACED SO THAT VACUUM PICK UP AREA WILL BE IN CENTER OF PART.
  - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
  - MEASURE POINT FOR PLATING THICKNESS.

12. COPLANARITY FOR CIRCUIT SIZES UP TO 40 IS 0.15 MM/006 INCH. FOR CIRCUIT SIZES 42 AND LARGER, CONTACT MOLEX SALES DEPARTMENT.

CORRECT DIM. H	REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH	MM/IN	INCH			
G5	REV	DESCRIPTION	4 PLACES	± .005	± .005	RKA	04/07/19	SALES ASSY INSULATOR DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100	molex
			3 PLACES	± .005	± .005	BBARKER	04/07/19		
			2 PLACES	± 0.13	± .010	APPROVED BY	DATE		
			1 PLACE	± 0.25	± .010	FSMITH	2013/09/03		
			0 PLACE	± .010	± .010				
			ANGULAR ±1/2°		SEE CHARTS		DOCUMENT NO. SD-71308-002		SHEET NO. 1 OF 5
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

1b\_frame\_C.P.A.M.T Rev. G 2012/01/11 12 11 10 9 8 7 6 5 4 3 2 1



Distributor of Molex Connector Corporation: Excellent Integrated System Limited


Datasheet of 0713089060 - CONN SMD BKWY HDR TIN 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

CKTS	DIM. A		DIM. B		EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	
	MM	IN	MM	IN													
04	5.08	.200	2.54	.100													04
06	7.62	.300	5.08	.200	71308-9060						71308-9061						06
08	10.16	.400	7.62	.300	71308-9080												08
10	12.70	.500	10.16	.400	71308-3210						71308-3110						10
12	15.24	.600	12.70	.500													12
14	17.78	.700	15.24	.600	71308-3214				71308-9140				71308-9147				14
16	20.32	.800	17.78	.700													16
18	22.86	.900	20.32	.800													18
20	25.40	1.000	22.86	.900					71308-9200								20
22	27.94	1.100	25.40	1.000													22
24	30.48	1.200	27.94	1.100			71308-2240										24
26	33.02	1.300	30.48	1.200													26
28	35.56	1.400	33.02	1.300													28
30	38.10	1.500	35.56	1.400													30
32	40.64	1.600	38.10	1.500													32
34	43.18	1.700	40.64	1.600													34
36	45.72	1.800	43.18	1.700													36
38	48.26	1.900	45.72	1.800													38
40	50.80	2.000	48.26	1.900													40
42	53.34	2.100	50.80	2.000													42
44	55.88	2.200	53.34	2.100													44
46	58.42	2.300	55.88	2.200													46
48	60.96	2.400	58.42	2.300													48
50	63.50	2.500	60.96	2.400													50
52	66.04	2.600	63.50	2.500													52
54	68.58	2.700	66.04	2.600													54
56	71.12	2.800	68.58	2.700													56
58	73.66	2.900	71.12	2.800													58
60	76.20	3.000	73.66	2.900													60
62	78.74	3.100	76.20	3.000													62
64	81.28	3.200	78.74	3.100													64
66	83.82	3.300	81.28	3.200													66
68	86.36	3.400	83.82	3.300													68
70	88.90	3.500	86.36	3.400													70
72	91.44	3.600	88.90	3.500													72
74	93.98	3.700	91.44	3.600													74
76	96.52	3.800	93.98	3.700													76
78	99.06	3.900	96.52	3.800													78
80	101.60	4.000	99.06	3.900													80
82	104.14	4.100	101.60	4.000													82
84	106.68	4.200	104.14	4.100													84
86	109.22	4.300	106.68	4.200													86
88	111.76	4.400	109.22	4.300													88
90	114.30	4.500	111.76	4.400													90
92	116.84	4.600	114.30	4.500													92
94	119.38	4.700	116.84	4.600													94
96	121.92	4.800	119.38	4.700													96
98	124.46	4.900	121.92	4.800													98
100	127.00	5.000	124.46	4.900													100

NO PEG VERSION  
(SEE ALSO SHEET 3)

SEE SHEET 1 IEC NO: UCP2014-0809 DRAWN BY: RKA CHKD: BELL APPROV: SMITH G5	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM/IN		---	INCH		
				DRAWN BY: RKA DATE: 04/07/19		TITLE: SALES ASSY INSULATOR			
				CHECKED BY: BBARKER DATE: 04/07/19		DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100			
		1 PLACE ±0.25 ±---		APPROVED BY: F SMITH DATE: 2013/09/03		MATERIAL NO.		DOCUMENT NO.	
		0 PLACE ±---		ANGULAR ±1/2°		SEE CHARTS		SD-71308-002	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 2 OF 5	



Distributor of Molex Connector Corporation: Excellent Integrated System Limited


Datasheet of 0713089060 - CONN SMD BKWY HDR TIN 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

IN TAPE AND REEL WITH SHALLOW POCKET TAPE										BULK / IN TUBES			
PACKAGING		4-8 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS		BULK			
SEE NOTE 4 SHT 1		10-100 CKT		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS		TAPE-N-REEL W/ VAC CAPS		TUBES			
DIM. M±0.25 MM				6.10 (.240)		6.10 (.240)		8.13 (.320)		8.13 (.320)			
PLATING				30 GOLD		15 GOLD		TIN		TIN			
DIM. H				2.54 (.100)		2.54 (.100)		4.57 (.180)		4.57 (.180)			
CKTS	DIM. A		DIM. B		EDP NUMBER		EDP NUMBER		EDP NUMBER		EDP NUMBER		CKTS
	MM	IN	MM	IN									
04	5.08	.200	2.54	.100							713088004		04
06	7.62	.300	5.08	.200							713088006		06
08	10.16	.400	7.62	.300							713088008		08
10	12.70	.500	10.16	.400							713088010		10
12	15.24	.600	12.70	.500							713088012		12
14	17.78	.700	15.24	.600							713088014		14
16	20.32	.800	17.78	.700							713088016		16
18	22.86	.900	20.32	.800							713088018		18
20	25.40	1.000	22.86	.900							713088020		20
22	27.94	1.100	25.40	1.000							713088022		22
24	30.48	1.200	27.94	1.100					713088124		713088024		24
26	33.02	1.300	30.48	1.200							713088026		26
28	35.56	1.400	33.02	1.300							713088028		28
30	38.10	1.500	35.56	1.400							713088030		30
32	40.64	1.600	38.10	1.500							713088032		32
34	43.18	1.700	40.64	1.600							713088034		34
36	45.72	1.800	43.18	1.700							713088036		36
38	48.26	1.900	45.72	1.800							713088038		38
40	50.80	2.000	48.26	1.900							713088040		40
42	53.34	2.100	50.80	2.000							713088042		42
44	55.88	2.200	53.34	2.100							713088044		44
46	58.42	2.300	55.88	2.200							713088046		46
48	60.96	2.400	58.42	2.300							713088048		48
50	63.50	2.500	60.96	2.400							713088050		50
52	66.04	2.600	63.50	2.500							713088052		52
54	68.58	2.700	66.04	2.600							713088054		54
56	71.12	2.800	68.58	2.700							713088056		56
58	73.66	2.900	71.12	2.800							713088058		58
60	76.20	3.000	73.66	2.900							713088060		60
62	78.74	3.100	76.20	3.000							713088062		62
64	81.28	3.200	78.74	3.100							713088064		64
66	83.82	3.300	81.28	3.200							713088066		66
68	86.36	3.400	83.82	3.300							713088068		68
70	88.90	3.500	86.36	3.400							713088070		70
72	91.44	3.600	88.90	3.500							713088072		72
74	93.98	3.700	91.44	3.600							713088074		74
76	96.52	3.800	93.98	3.700							713088076		76
78	99.06	3.900	96.52	3.800							713088078		78
80	101.60	4.000	99.06	3.900							713088080		80
82	104.14	4.100	101.60	4.000									82
84	106.68	4.200	104.14	4.100									84
86	109.22	4.300	106.68	4.200									86
88	111.76	4.400	109.22	4.300									88
90	114.30	4.500	111.76	4.400									90
92	116.84	4.600	114.30	4.500									92
94	119.38	4.700	116.84	4.600									94
96	121.92	4.800	119.38	4.700									96
98	124.46	4.900	121.92	4.800									98
100	127.00	5.000	124.46	4.900									100

NO PEG VERSION  
(ALSO SEE SHEET 2)

SEE SHEET 1 IEC NO: UCP2014-0809 DRAWN BY: RKA CHKD: BELL APPROV: SMITH G5	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM/IN		---	INCH		
				mm	INCH	DRAWN BY	DATE	TITLE	
				4 PLACES ±---	±---	RKA	04/07/19	SALES ASSY INSULATOR	
		3 PLACES ±---	±.005	CHECKED BY	DATE	DUAL ROW SMT W/BREAK-OFF			
		2 PLACES ±0.13	±.010	BBARKER	04/07/19	.025SQ PIN GULLWING .100			
		1 PLACE ±0.25	±---	APPROVED BY	DATE	molex			
		0 PLACE ±---	±---	FSMITH	2013/09/03	SD-71308-002			
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHARTS		SD-71308-002		3 OF 5	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0713089060 - CONN SMD BKWY HDR TIN 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com


13 12 11 10 9 8 7 6 5 4 3 2 1

J	PACKAGING		4-8 CKT	BULK	TAPE-N-REEL W/ VAC CAPS	BULK	TAPE-N-REEL W/ VAC CAPS	BULK	TAPE-N-REEL W/ VAC CAPS	BULK	BULK	BULK	J		
	SEE NOTE 4 SHT		8-100 CKT	TUBES	TAPE-N-REEL W/ VAC CAPS	TUBES	TAPE-N-REEL W/ VAC CAPS	TUBES	TAPE-N-REEL W/ VAC CAPS	TUBES	TUBES	TUBES			
I	DIM. M±0.25 MM		6.10 (.240)		6.10 (.240)		6.10 (.240)		8.13 (.320)		8.13 (.320)		8.13 (.320)		I
	PLATING		TIN		15 GOLD		30 GOLD		TIN		15 GOLD		30 GOLD		
H	DIM. H		2.54 (.100)		2.54 (.100)		2.54 (.100)		4.57 (.180)		4.57 (.180)		4.57 (.180)		H
	CKTS	DIM. A	DIM. B	DIM. C	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	
G	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	CKTS
	04	5.08	.200	2.54	.100	----	----	----	----	----	----	----	----	----	04
06	7.62	.300	5.08	.200	2.54	.100									06
08	10.16	.400	7.62	.300	5.08	.200									08
10	12.70	.500	10.16	.400	7.62	.300									10
12	15.24	.600	12.70	.500	10.16	.400			71308-1102						12
14	17.78	.700	15.24	.600	12.70	.500									14
16	20.32	.800	17.78	.700	15.24	.600									16
18	22.86	.900	20.32	.800	17.78	.700									18
20	25.40	1.000	22.86	.900	20.32	.800									20
22	27.94	1.100	25.40	1.000	22.86	.900									22
24	30.48	1.200	27.94	1.100	25.40	1.000									24
26	33.02	1.300	30.48	1.200	27.94	1.100									26
28	35.56	1.400	33.02	1.300	30.48	1.200									28
30	38.10	1.500	35.56	1.400	33.02	1.300									30
32	40.64	1.600	38.10	1.500	35.56	1.400									32
34	43.18	1.700	40.64	1.600	38.10	1.500									34
36	45.72	1.800	43.18	1.700	40.64	1.600									36
38	48.26	1.900	45.72	1.800	43.18	1.700									38
40	50.80	2.000	48.26	1.900	45.72	1.800									40
42	53.34	2.100	50.80	2.000	48.26	1.900									42
44	55.88	2.200	53.34	2.100	50.80	2.000									44
46	58.42	2.300	55.88	2.200	53.34	2.100									46
48	60.96	2.400	58.42	2.300	55.88	2.200									48
50	63.50	2.500	60.96	2.400	58.42	2.300									50
52	66.04	2.600	63.50	2.500	60.96	2.400									52
54	68.58	2.700	66.04	2.600	63.50	2.500									54
56	71.12	2.800	68.58	2.700	66.04	2.600									56
58	73.66	2.900	71.12	2.800	68.58	2.700									58
60	76.20	3.000	73.66	2.900	71.12	2.800									60
62	78.74	3.100	76.20	3.000	73.66	2.900									62
64	81.28	3.200	78.74	3.100	76.20	3.000									64
66	83.82	3.300	81.28	3.200	78.74	3.100									66
68	86.36	3.400	83.82	3.300	81.28	3.200									68
70	88.90	3.500	86.36	3.400	83.82	3.300									70
72	91.44	3.600	88.90	3.500	86.36	3.400									72
74	93.98	3.700	91.44	3.600	88.90	3.500									74
76	96.52	3.800	93.98	3.700	91.44	3.600									76
78	99.06	3.900	96.52	3.800	93.98	3.700									78
80	101.60	4.000	99.06	3.900	96.52	3.800									80
82	104.14	4.100	101.60	4.000	99.06	3.900									82
84	106.68	4.200	104.14	4.100	101.60	4.000									84
86	109.22	4.300	106.68	4.200	104.14	4.100									86
88	111.76	4.400	109.22	4.300	106.68	4.200									88
90	114.30	4.500	111.76	4.400	109.22	4.300									90
92	116.84	4.600	114.30	4.500	111.76	4.400									92
94	119.38	4.700	116.84	4.600	114.30	4.500									94
96	121.92	4.800	119.38	4.700	116.84	4.600									96
98	124.46	4.900	121.92	4.800	119.38	4.700									98
100	127.00	5.000	124.46	4.900	121.92	4.800									100

LONG PEG VERSION (.130")

SEE SHEET 1 IEC NO: UCP2014-0809 DRAWN BY: RKA CHECKED BY: BBARKER APPROVED BY: F SMITH G5 REV	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM/IN		---	INCH		
				DRAWN BY: RKA DATE: 04/07/19		CHECKED BY: BBARKER DATE: 04/07/19		TITLE: SALES ASSY INSULATOR DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100	
				APPROVED BY: F SMITH DATE: 2013/09/03		MATERIAL NO.		DOCUMENT NO.	SHEET NO.
		ANGULAR ±1/2°		SEE CHARTS		SD-71308-002		4 OF 5	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12 11 10 9 8 7 6 5 4 3 2 1



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0713089060 - CONN SMD BKWY HDR TIN 6POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

13 12 11 10 9 8 7 6 5 4 3 2 1

CKTS	DIM. A		DIM. B		DIM. C		EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	EDP NUMBER	CKTS
	MM	IN	MM	IN	MM	IN									
04	5.08	.200	2.54	.100	---	---									04
06	7.62	.300	5.08	.200	2.54	.100									06
08	10.16	.400	7.62	.300	5.08	.200									08
10	12.70	.500	10.16	.400	7.62	.300									10
12	15.24	.600	12.70	.500	10.16	.400									12
14	17.78	.700	15.24	.600	12.70	.500									14
16	20.32	.800	17.78	.700	15.24	.600									16
18	22.86	.900	20.32	.800	17.78	.700									18
20	25.40	1.000	22.86	.900	20.32	.800									20
22	27.94	1.100	25.40	1.000	22.86	.900									22
24	30.48	1.200	27.94	1.100	25.40	1.000									24
26	33.02	1.300	30.48	1.200	27.94	1.100									26
28	35.56	1.400	33.02	1.300	30.48	1.200									28
30	38.10	1.500	35.56	1.400	33.02	1.300									30
32	40.64	1.600	38.10	1.500	35.56	1.400									32
34	43.18	1.700	40.64	1.600	38.10	1.500									34
36	45.72	1.800	43.18	1.700	40.64	1.600									36
38	48.26	1.900	45.72	1.800	43.18	1.700									38
40	50.80	2.000	48.26	1.900	45.72	1.800									40
42	53.34	2.100	50.80	2.000	48.26	1.900									42
44	55.88	2.200	53.34	2.100	50.80	2.000									44
46	58.42	2.300	55.88	2.200	53.34	2.100									46
48	60.96	2.400	58.42	2.300	55.88	2.200									48
50	63.50	2.500	60.96	2.400	58.42	2.300									50
52	66.04	2.600	63.50	2.500	60.96	2.400									52
54	68.58	2.700	66.04	2.600	63.50	2.500									54
56	71.12	2.800	68.58	2.700	66.04	2.600									56
58	73.66	2.900	71.12	2.800	68.58	2.700									58
60	76.20	3.000	73.66	2.900	71.12	2.800									60
62	78.74	3.100	76.20	3.000	73.66	2.900									62
64	81.28	3.200	78.74	3.100	76.20	3.000									64
66	83.82	3.300	81.28	3.200	78.74	3.100									66
68	86.36	3.400	83.82	3.300	81.28	3.200									68
70	88.90	3.500	86.36	3.400	83.82	3.300									70
72	91.44	3.600	88.90	3.500	86.36	3.400									72
74	93.98	3.700	91.44	3.600	88.90	3.500									74
76	96.52	3.800	93.98	3.700	91.44	3.600									76
78	99.06	3.900	96.52	3.800	93.98	3.700									78
80	101.60	4.000	99.06	3.900	96.52	3.800									80
82	104.14	4.100	101.60	4.000	99.06	3.900									82
84	106.68	4.200	104.14	4.100	101.60	4.000									84
86	109.22	4.300	106.68	4.200	104.14	4.100									86
88	111.76	4.400	109.22	4.300	106.68	4.200									88
90	114.30	4.500	111.76	4.400	109.22	4.300									90
92	116.84	4.600	114.30	4.500	111.76	4.400									92
94	119.38	4.700	116.84	4.600	114.30	4.500									94
96	121.92	4.800	119.38	4.700	116.84	4.600									96
98	124.46	4.900	121.92	4.800	119.38	4.700									98
100	127.00	5.000	124.46	4.900	121.92	4.800									100

A	B	SHORT PEG VERSION (.055")	SEE SHEET 1 EC NO: UCP2014-0809 DRAWN BY: RKA CHECKED BY: BBARKER CHKD: BELL APPROV: SMITH 2013/08/23 2013/08/23 2013/09/03	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±--- 0 PLACE ±--- ±--- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY: RKA DATE: 04/07/19 CHECKED BY: BBARKER DATE: 04/07/19 APPROVED BY: F SMITH DATE: 2013/09/03	SCALE: --- DESIGN UNITS: INCH THIRD ANGLE PROJECTION	TITLE: SALES ASSY INSULATOR DUAL ROW SMT W/BREAK-OFF .025SQ PIN GULLWING .100 <b>molex</b>	MATERIAL NO. DOCUMENT NO. SD-71308-002 SHEET NO. 5 OF 5

13 12 11 10 9 8 7 6 5 4 3 2 1