

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Comchip Technology](#)

[CDBA120LL-G](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## Low VF SMD Schottky Barrier Rectifiers




# CDBA120L-G Thru. CDBA140SL-G

Reverse Voltage: 20 to 40 Volts

Forward Current: 1.0 Amp

RoHS Device




### Features

- Ideal for surface mount applications.
- Easy pick and place.
- Plastic package has Underwriters Lab. flammability classification 94V-0.
- Built in strain relief.
- Super low forward voltage drop.

### Mechanical data

- Case: JEDEC DO-214AC, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end.
- Approx. weight: 0.063 grams

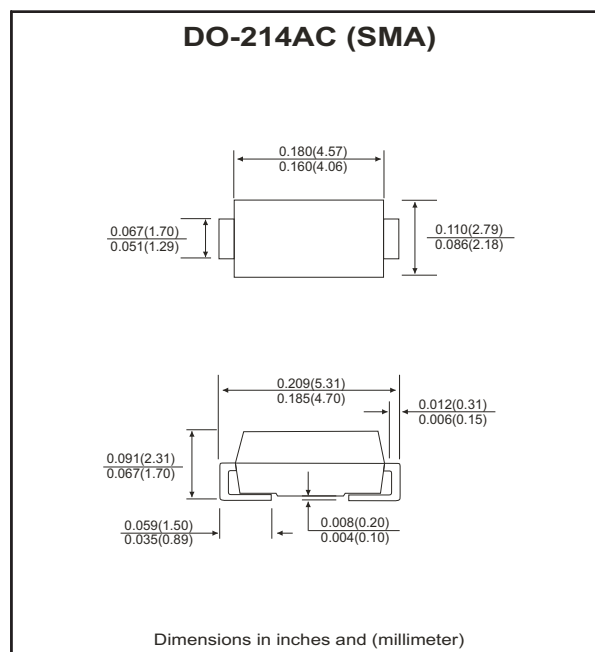

### Maximum Ratings and Electrical Characteristics

Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	CDBA 120L-G	CDBA 120LL-G	CDBA 140L-G	CDBA 140LL-G	CDBA 140SL-G	Units	
Max. repetitive peak reverse voltage	$V_{RRM}$	20	20	40	40	40	V	
Max. DC blocking voltage	$V_{DC}$	20	20	40	40	40	V	
Max. RMS voltage	$V_{RMS}$	14	14	28	28	28	V	
Peak surge forward current, 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$	35						A
Max. average forward current	$I_o$	1.0						A
Max. instantaneous forward voltage at 1.0A	$V_F$	0.38	0.31	0.40	0.34	0.31	V	
Max. DC reverse current at rated DC blocking voltage $T_A=25^{\circ}C$ $T_A=80^{\circ}C$	$I_R$	1.0 40						mA
Max. thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	88 20						$^{\circ}C/W$
Max. operating junction temperature	$T_J$	125						$^{\circ}C$
Storage temperature	$T_{STG}$	-55 to +125						$^{\circ}C$

Notes: 1. Thermal resistance from junction to ambient and junction to lead, P.C.B. mounted on 0.2x0.2 inch copper pad area.

# Low Vf SMD Schottky Barrier Rectifiers



## RATING AND CHARACTERISTIC CURVES (CDBA120L-G thru CDBA140SL-G)

Fig.1 Reverse Characteristics

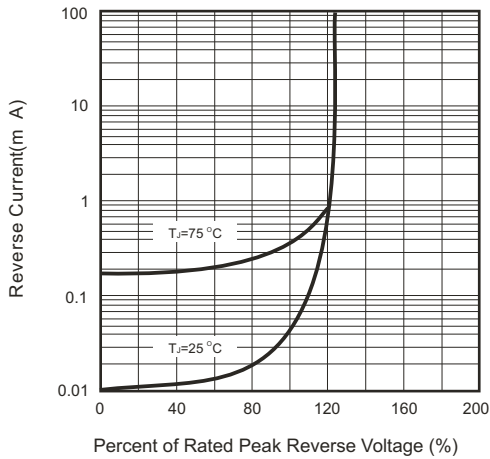


Fig.2 Forward Characteristics

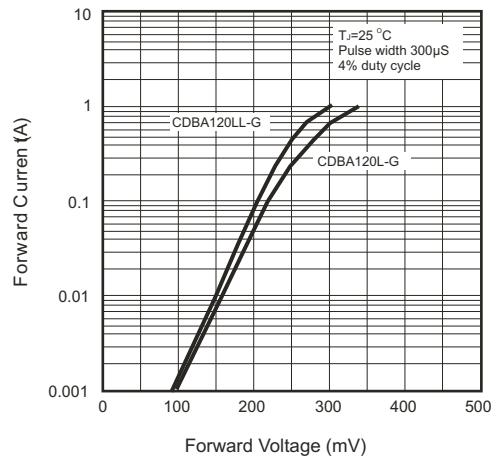


Fig.3 Junction Capacitance

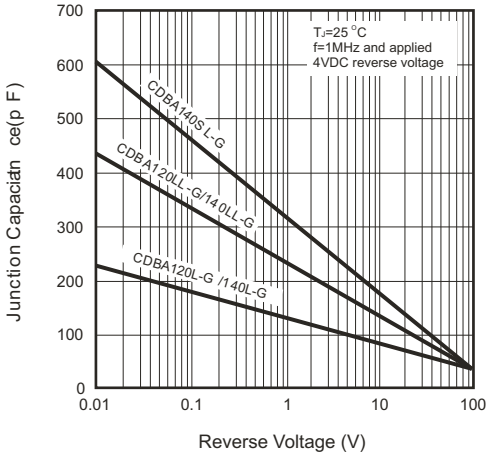


Fig.4 Forward Characteristics

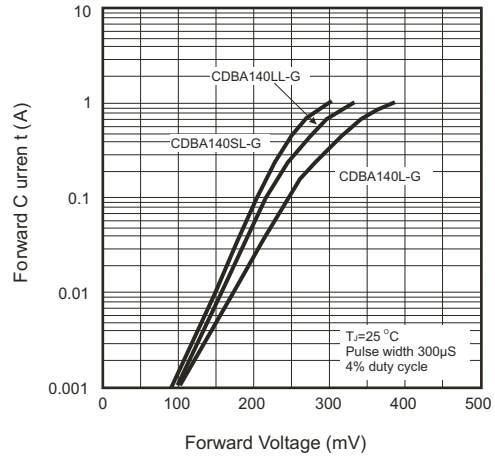


Fig.5 Non-repetitive Forward Surge Current

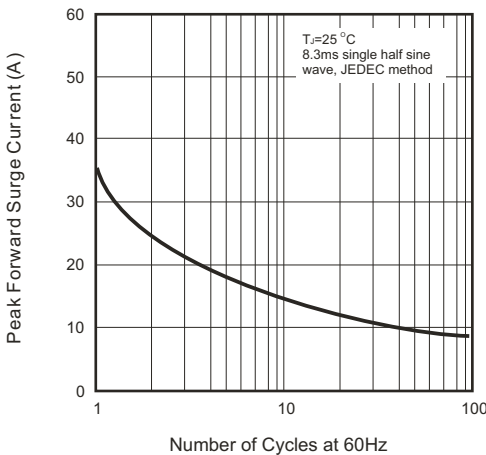


Fig.6 Current Derating Curve

