

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Comchip Technology](#)

[CDBF0520L](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# SMD Schottky Barrier Diode



## CDBF0520L (Lead-free Device)

$I_o = 500 \text{ mA}$   
 $V_R = 20 \text{ Volts}$




### Features

- Low forward voltage.
- Designed for mounting on small surface.
- Extremely thin / leadless package.
- Majority carrier conduction.

### Mechanical data

- Case: 1005(2512) standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any
- Weight: 0.006 gram(approx.).

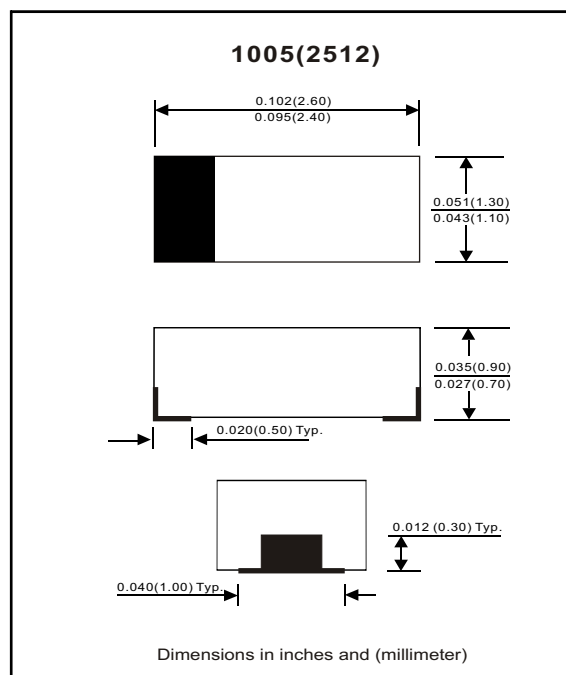

### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Peak reverse voltage		$V_{RM}$			20	V
Reverse voltage		$V_R$			20	V
Average forward rectified current		$I_o$			0.5	A
Forward current, surge peak	8.3 ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$			5.5	A
Storage temperature		$T_{STG}$	-40		+125	°C
Junction temperature		$T_j$	-40		+125	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 100 \text{ mA}$ @ $T_a = 25 \text{ }^\circ\text{C}$ $I_F = 500 \text{ mA}$ @ $T_a = 25 \text{ }^\circ\text{C}$ $I_F = 100 \text{ mA}$ @ $T_a = 100 \text{ }^\circ\text{C}$ $I_F = 500 \text{ mA}$ @ $T_a = 100 \text{ }^\circ\text{C}$	$V_F$			300 385 220 330	mV
Reverse current	$V_R = 10 \text{ V}$ @ $T_a = 25 \text{ }^\circ\text{C}$ $V_R = 20 \text{ V}$ @ $T_a = 25 \text{ }^\circ\text{C}$	$I_R$			75 250	uA
Capacitance between terminals	f = 1 MHz, and 0 VDC reverse voltage	$C_T$			170	pF
Reverse recovery time	$I_F = I_R = 10 \text{ mA}$ , $I_{rr} \times I_R$ , $R_L = 100 \text{ ohm}$	$T_{rr}$		22		ns

# SMD Schottky Barrier Diode



## RATING AND CHARACTERISTIC CURVES (CDBF0520L)

Fig. 1 - Forward characteristics

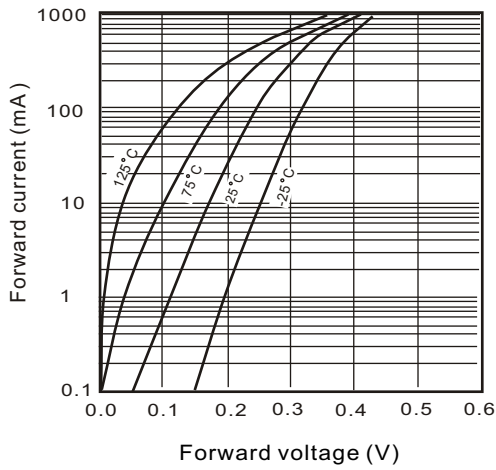


Fig. 2 - Reverse characteristics

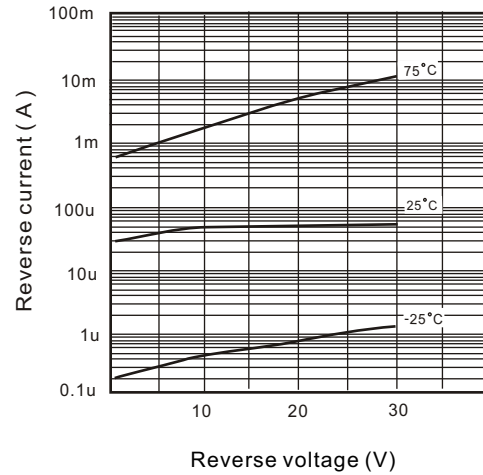


Fig. 3 - Capacitance between terminals characteristics

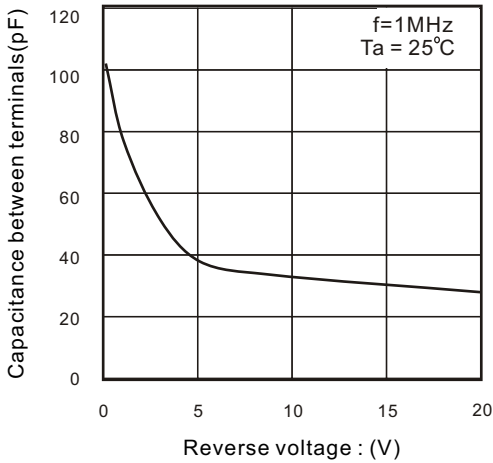


Fig. 4 - Current derating curve

