

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[KEMET](#)

[CWR09FC105KB](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

KEMET Part Number: T409A105K010BC
(CWR09FC105KB)



Capacitor, Tantalum, 1 uF, 2513, +/-10% Tol, -55/+125C, 10 VDC (85C), Failure Rate=B (0.1%/1000 Hrs)

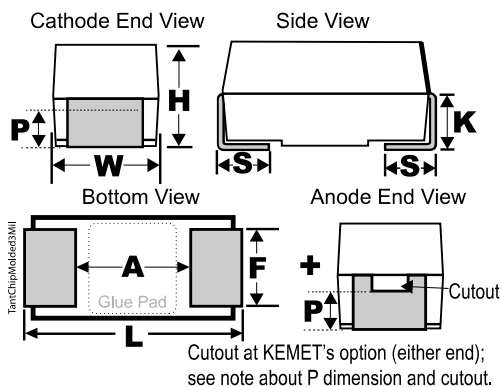

Cutout at KEMET's option (either end);
see note about P dimension and cutout.

Dimensions (mm)

Symbol	Dimension	Tolerance
L	2.54	+/-0.38
W	1.27	+/-0.38
H	1.27	+/-0.38
K	0.76	MIN
F	1.27	+/-0.13
S	0.76	+0.025/-0.13
P	0.38	MIN
A	1.02	NOM

Notes:

-Note: When Option C Is Selected For Lead Material, Add An Additional 0.38mm To The Tolerances For "L", "W", "H", "K", "F" And "S"

-P And R Dimensions Represents The Minimum Solderable Area Of The Termination Surface Entirely Below Cutout (If One Is Present)

General Information

Supplier:	KEMET
Application:	MIL-PRF-55365/4
Part Type Description:	SMD, MnO ₂ , Molded, Military Equivalent
Construction:	Standard Chip-MnO ₂
Body Type:	SMD Chip
Termination:	Hot Solder Dipped
Footprint:	2513
Weight:	39.91 mg
Approvals:	MIL-PRF-55365/4, CWR09 Style
RoHS:	No

Specifications

Capacitance:	1 uF
Tolerance:	+/-10%
Voltage:	10 VDC (85C)
Voltage:	6.7 VDC (125C)
Temperature Range:	-55/+125C
Testing:	Standard Testing Only
Resistance/ESR:	10 Ohms (100kHz)
Failure Rate:	B (0.1%/1000 Hrs)
Leakage Current:	1 uA
Dissipation Factor:	6%

Packaging Specifications

Package Kind:	T&R
Package Size:	7 in/180 mm
Package Quantity:	2500