

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[233-32](#)





For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:
SPECIFICATIONS:
CURRENT RATING:1 AMP.
VOLTAGE:250V AC/DC MAX.
DIELECTRIC WITHSTANDING:500VAC FOR ONE MINUTE.
CONTACT RESISTANCE:30mΩ (MAX).
INSULATION RESISTANCE:1000MΩ (MIN).
OPERATING TEMPERATURE:-55°FXC+105°FXC
RETENTION FORCE:0.30KG PER PIN (MIN).
MATERIALS:
BODY: PBT+30%GF UL 94V-0
COVER: PBT+30%GF UL 94V-0
CONTACTS:PHOSOR BRONZE.
CONTACT PLATING TIN Mark is major Text Dimension.

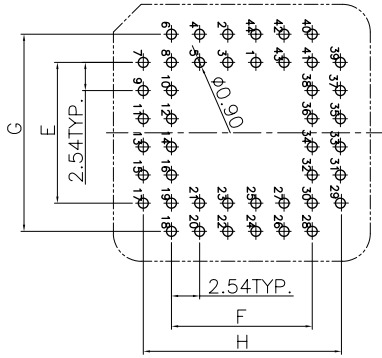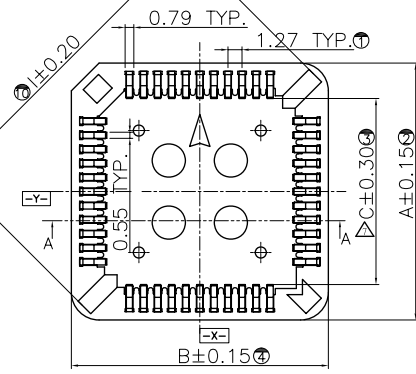

RECOMMENDED P.C. BOARD LAYOUT

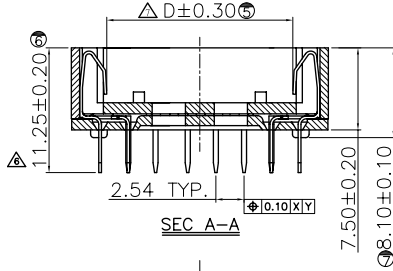

Dimension No.Of Pin	A	B	C	D	E	F	G	H	I
DIP - 20P	15.56	15.56	9.10	9.10	5.08	5.08	10.16	10.16	17.24
DIP - 28P	18.10	18.10	11.66	11.66	7.62	7.62	12.70	12.70	20.83
DIP - 32P	20.60	18.10	14.17	11.66	10.16	7.62	15.24	12.70	22.61
DIP - 44P	23.48	23.48	16.78	16.78	12.70	12.70	17.78	17.78	28.50
DIP - 52P	25.88	25.88	19.28	19.28	15.24	15.24	20.32	20.32	32.45
DIP - 68P	31.66	31.66	24.35	24.35	20.32	20.32	25.40	25.40	39.30
DIP - 84P	36.66	36.66	29.38	29.38	25.40	25.40	30.48	30.48	46.85

10/06/24	Jody	EG-N1013112	更改尺寸公差	△	A7
10/05/04	Jody	EG-N1013104	更改尺寸	△	A6
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表		CnC Tech, LLC				
X.X	±0.25	X.X'	±3.00'	TITLE: PLCC 0.25 DIP180度成品		
X.XX	±0.15	X.XX'	±1.00'	PRODUCT NO: 233-XX		
X.XXX	±0.050	X.XXX'	±0.500'	DATE	SCALE	
			APPD: 核准:	UNIT	TYPE	
			CHECK: 校對:	PD	PAGE	
			DRAW: 繪圖:	2010.06.24	1:1	
				mm	PD	
					1 / 1	