

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[CNC Tech](#)
[245-08-1-03](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



NOTES:
MATERIAL: PHOSPHOR BRONZE
INSULATOR: PBT+30% GLASS UL 94V-0
ELECTRICAL:
CONTACT CURRENT PATING: 1A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC
CONTACT RESISTANCE: 20milliohms max
INSULATION RESISTANCE: 1000 MEGOHMS
CAPACITANCE: 0.5PICO-FARAD MAXIMUM
TEMPERATURE RANGE: -40°C+105°C
MECHANICAL:
ENGAGING FORCE: 340g/A CONTACT MAX.
SEPARATING FORCE: 20g/A CONTACT MIN.
DURABILITY: 50 CYCLES
NO.OF CONTACT: 6-48
FINISH:
CONTACT PLATING: TIN PLATED 60.03U"-88.35U"

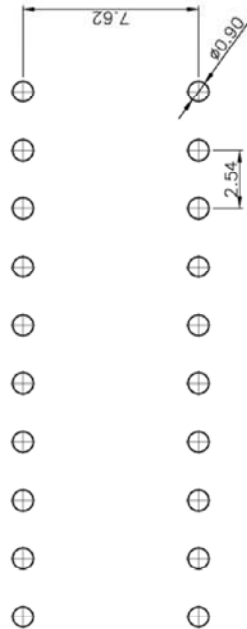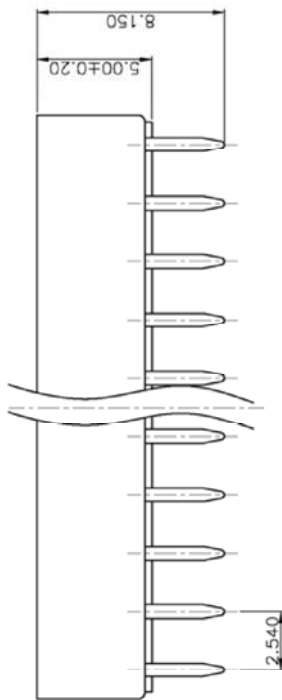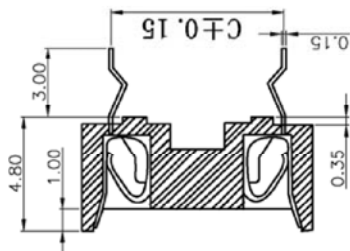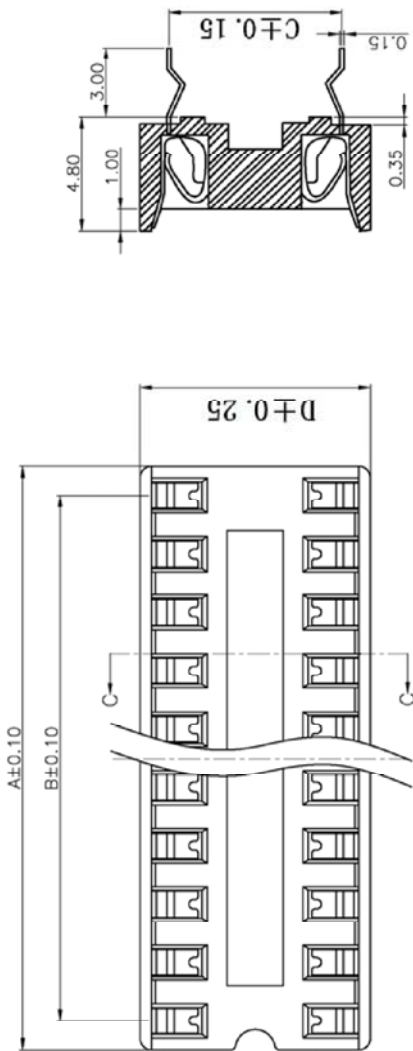

PCB LAYOUT

PIN NO.	DIM A	DIM B	DIM C	DIM D
8	10.16	7.62	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.76	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.4	22.86	7.62	10.16
22	27.95	25.4	7.62	10.16

2011/06/21	XIE		NEW DWG		A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
-TOLERANCES-		CnC Tech,LLC			
UNLESS OTHERWISE SPECIFIED		Industrial Cable and Connector Technology			
		TITLE: Retentive Leg, 7.62MM Pitch			
X.X	±0.30	X.X	±3.00	APPD:	PRODUCT NO: 245-XX-1-03
X.XX	±0.25	X.XX	±1.00	CHECK:	DATE
X.XXX	±0.100	X.XXX	±0.500	DRAW:	2011/06/21
				SCALE	UNIT
				1:1	mm
				TYPE	PAGE
				Z	1/1