

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[245-18-1-03](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NOTES:
 MATERIAL: PHOSPHOR BRONZE
 INSULATOR: PBT+30% GLASS UL 94V-0
 ELECTRICAL:
 CONTACT CURRENT RATING: 1A
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC
 CONTACT RESISTANCE: 20milliohms max
 INSULATION RESISTANCE: 1000 MEGOHMS
 CAPACITANCE: 0.5PICO-FARAD MAXIMUM
 TEMPERATURE RANGE: -40°C+105°C
 MECHANICAL:
 ENGAGING FORCE: 340g/A CONTACT MAX.
 SEPARATING FORCE: 20g/A CONTACT MIN.
 DURABILITY: 50 CYCLES
 NO.OF CONTACT: 6-48
 FINISH:
 CONTACT PLATING: TIN PLATED 60.03U"-88.35U"

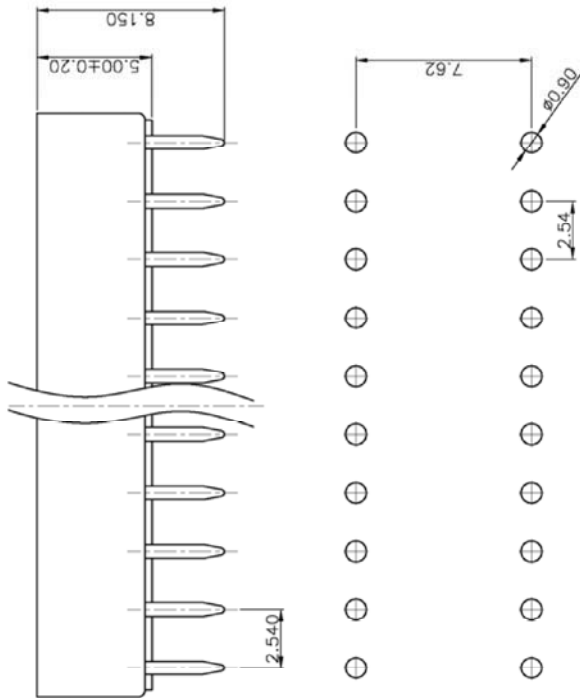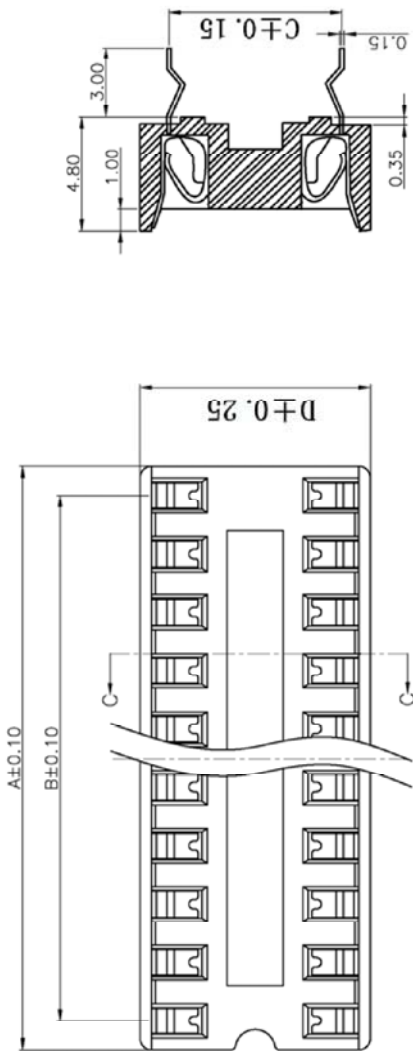

PCB LAYOUT

PIN NO.	DIM A	DIM B	DIM C	DIM D
8	10.16	7.62	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.76	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.4	22.86	7.62	10.16
22	27.95	25.4	7.62	10.16

2011/06/21	XIE	NEW DWG	A0
DATE	DR.BY	ECN.NO.	DESCRIPTION
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			
Industrial Cable and Connector Technology CnC Tech,LLC			
TITLE: Retentive Leg, 7.62MM Pitch PRODUCT NO: 245-XX-1-03			
X.X	±0.30	X.X	±3.00
X.XX	±0.25	X.XX	±1.00
X.XXX	±0.100	X.XXX	±0.500
DATE 2011/06/21			
SCALE 1:1			
UNIT mm			
TYPE Z			
PAGE 1/1			