


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[304-28-14-MC-0300F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

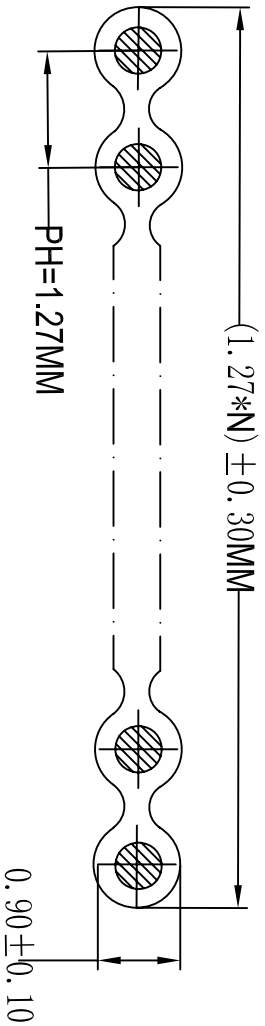

ITEM NO.	NO. of Core	Overall Diameter		Allowable error (mm)
		Thickness	Width	
304-28-09-MC-0300F	09	0.90 ± 0.05	11.43	± 0.30
304-28-11-MC-0300F	10	0.90 ± 0.05	12.70	± 0.30
304-28-14-MC-0300F	14	0.90 ± 0.05	17.78	± 0.30
304-28-15-MC-0300F	15	0.90 ± 0.05	19.05	± 0.30
304-28-16-MC-0300F	16	0.90 ± 0.05	20.32	± 0.30
304-28-20-MC-0300F	20	0.90 ± 0.05	25.40	± 0.30
304-28-24-MC-0300F	24	0.90 ± 0.05	30.48	± 0.30
304-28-25-MC-0300F	25	0.90 ± 0.05	31.75	± 0.30
304-28-26-MC-0300F	26	0.90 ± 0.05	33.02	± 0.30
304-28-30-MC-0300F	30	0.90 ± 0.05	38.10	± 0.30
304-28-34-MC-0300F	34	0.90 ± 0.05	43.18	± 0.30
304-28-37-MC-0300F	37	0.90 ± 0.05	46.99	± 0.30
304-28-40-MC-0300F	40	0.90 ± 0.05	50.80	± 0.30
304-28-51-MC-0300F	50	0.90 ± 0.05	63.50	± 0.30
304-28-60-MC-0300F	60	0.90 ± 0.05	76.20	± 0.30

Conductor:

AWG: 28AWG
 Material: TC
 Conductor Size: 7/Φ0.125 ± 0.008MM

Insulation:

Min. Avg. Thick: 0.22MM
 Material: 35P UL-PVC
 ID: 0.82 ± 0.03MM
 Color: Brown, red, pink, yellow, green, blue, purple, grey, white, black brown, red.....

Jacket:

Material: 45P UL-PVC
 Color: Clear (Half Atomizer)
 Tensile Strength-before aging: 1,500PSI
 Tensile Strength-after aging: 70% Min. (136° C*168H)
 Elongating-before aging: 100% Min
 Elongating-after aging: 65% Min. (136° C*168H)
 Deformation Test: 50% Max. (121° C*1h)
 Cold Bent Test: -10° C*4H No Cracking
 Horizontal Flame Test: VW-1

Electrical:

Rating: Temp 105° C
 Voltage: 300V
 Dielectric Strength: 2.0KV 60Hz Minute Max: 237.25 Ω/KM
 Conductor Resistance: at 20° C
 Insulation Resistance: 100M/Ω Min. @500V DC
 UL File No. E189529
 UL Style: 2651-WW-1

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	RLM	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	
DECIDE BY		DATE	2012-03-05
VERSIONS/EDITION	A/0	PROJECT	