

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[International Rectifier \(Infineon Technologies Americas Corp.\)  
AUIRFR3504TRL](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


## AUTOMOTIVE GRADE

## AUIRFR3504

### Features

- Advanced Planar Technology
- Low On-Resistance
- 175°C Operating Temperature
- Fast Switching
- Fully Avalanche Rated
- Repetitive Avalanche Allowed up to  $T_{jmax}$
- Lead-Free, RoHS Compliant
- Automotive Qualified \*


HEXFET® Power MOSFET



|                         |      |              |
|-------------------------|------|--------------|
| $V_{DS}$                |      | <b>40V</b>   |
| $R_{DS(on)}$            | typ. | <b>7.8mΩ</b> |
|                         | max. | <b>9.2mΩ</b> |
| $I_D$ (Silicon Limited) |      | <b>87A®</b>  |
| $I_D$ (Package Limited) |      | <b>56A</b>   |

### Description

Specifically designed for Automotive applications, this Stripe Planar design of HEXFET® Power MOSFETs utilizes the latest processing techniques to achieve low on-resistance per silicon area. This benefit combined with the fast switching speed and ruggedized device design that HEXFET power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in Automotive and a wide variety of other applications.



|          |          |          |
|----------|----------|----------|
| <b>G</b> | <b>D</b> | <b>S</b> |
| Gate     | Drain    | Source   |

| Base part number | Package Type | Standard Pack      |          | Orderable Part Number |
|------------------|--------------|--------------------|----------|-----------------------|
|                  |              | Form               | Quantity |                       |
| AUIRFR3504       | D-Pak        | Tube               | 75       | AUIRFR3504            |
|                  |              | Tape and Reel Left | 3000     | AUIRFR3504TRL         |

### Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature ( $T_A$ ) is 25°C, unless otherwise specified.

| Symbol                          | Parameter                                                         | Max.                    | Units |
|---------------------------------|-------------------------------------------------------------------|-------------------------|-------|
| $I_D @ T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS} @ 10\text{V}$ (Silicon Limited) | 87®                     | A     |
| $I_D @ T_C = 100^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$ (Silicon Limited) | 61®                     |       |
| $I_D @ T_C = 25^\circ\text{C}$  | Continuous Drain Current, $V_{GS} @ 10\text{V}$ (Package Limited) | 56                      |       |
| $I_{DM}$                        | Pulsed Drain Current ①                                            | 350                     |       |
| $P_D @ T_C = 25^\circ\text{C}$  | Maximum Power Dissipation                                         | 140                     | W     |
|                                 | Linear Derating Factor                                            | 0.92                    | W/°C  |
| $V_{GS}$                        | Gate-to-Source Voltage                                            | ± 20                    | V     |
| $E_{AS}$                        | Single Pulse Avalanche Energy (Thermally Limited) ②               | 240                     | mJ    |
| $E_{AS}$ (Tested)               | Single Pulse Avalanche Energy Tested Value ⑥⑦                     | 480                     |       |
| $I_{AR}$                        | Avalanche Current ①                                               | See Fig.15,16, 12a, 12b | A     |
| $E_{AR}$                        | Repetitive Avalanche Energy ⑤                                     |                         | mJ    |
| $T_J$                           | Operating Junction and                                            | -55 to + 175            | °C    |
| $T_{STG}$                       | Storage Temperature Range                                         |                         |       |
|                                 | Soldering Temperature, for 10 seconds (1.6mm from case)           | 300                     |       |

### Thermal Resistance

| Symbol          | Parameter                         | Typ. | Max. | Units |
|-----------------|-----------------------------------|------|------|-------|
| $R_{\theta JC}$ | Junction-to-Case ⑩                | —    | 1.09 | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient (PCB Mount) ⑨ | —    | 50   |       |
| $R_{\theta JA}$ | Junction-to-Ambient               | —    | 110  |       |


HEXFET® is a registered trademark of Infineon.

\*Qualification standards can be found at [www.infineon.com](http://www.infineon.com)


**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

|                                 | Parameter                            | Min. | Typ.  | Max. | Units               | Conditions                                           |
|---------------------------------|--------------------------------------|------|-------|------|---------------------|------------------------------------------------------|
| $V_{(BR)DSS}$                   | Drain-to-Source Breakdown Voltage    | 40   | —     | —    | V                   | $V_{GS} = 0V, I_D = 250\mu A$                        |
| $\Delta V_{(BR)DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.041 | —    | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}$ , $I_D = 1\text{mA}$ |
| $R_{DS(on)}$                    | Static Drain-to-Source On-Resistance | —    | 7.8   | 9.2  | m $\Omega$          | $V_{GS} = 10V, I_D = 30A$ ④**                        |
| $V_{GS(th)}$                    | Gate Threshold Voltage               | 2.0  | —     | 4.0  | V                   | $V_{DS} = V_{GS}, I_D = 250\mu A$                    |
| $g_{fs}$                        | Forward Trans conductance            | 40   | —     | —    | S                   | $V_{DS} = 10V, I_D = 30A$ ④**                        |
| $I_{DSS}$                       | Drain-to-Source Leakage Current      | —    | —     | 20   | $\mu A$             | $V_{DS} = 40V, V_{GS} = 0V$                          |
|                                 |                                      | —    | —     | 250  |                     | $V_{DS} = 40V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| $I_{GSS}$                       | Gate-to-Source Forward Leakage       | —    | —     | 200  | nA                  | $V_{GS} = 20V$                                       |
|                                 | Gate-to-Source Reverse Leakage       | —    | —     | -200 |                     | $V_{GS} = -20V$                                      |

**Dynamic Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**


|                       |                              |   |      |    |    |                                                                                                                                                         |
|-----------------------|------------------------------|---|------|----|----|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| $Q_g$                 | Total Gate Charge            | — | 48   | 71 | nC | $I_D = 30A^{**}$                                                                                                                                        |
| $Q_{gs}$              | Gate-to-Source Charge        | — | 12   | 18 |    | $V_{DS} = 32V$                                                                                                                                          |
| $Q_{gd}$              | Gate-to-Drain Charge         | — | 13   | 20 |    | $V_{GS} = 10V$ ④                                                                                                                                        |
| $t_{d(on)}$           | Turn-On Delay Time           | — | 11   | —  | ns | $V_{DD} = 20V$                                                                                                                                          |
| $t_r$                 | Rise Time                    | — | 53   | —  |    | $I_D = 30A^{**}$                                                                                                                                        |
| $t_{d(off)}$          | Turn-Off Delay Time          | — | 36   | —  |    | $R_G = 6.8\Omega$                                                                                                                                       |
| $t_f$                 | Fall Time                    | — | 22   | —  |    | $V_{GS} = 10V$ ④                                                                                                                                        |
| $L_D$                 | Internal Drain Inductance    | — | 4.5  | —  | nH | Between lead, 6mm (0.25in.) from package and center of die contact  |
| $L_S$                 | Internal Source Inductance   | — | 7.5  | —  |    |                                                                                                                                                         |
| $C_{iss}$             | Input Capacitance            | — | 2150 | —  | pF | $V_{GS} = 0V$                                                                                                                                           |
| $C_{oss}$             | Output Capacitance           | — | 580  | —  |    | $V_{DS} = 25V$                                                                                                                                          |
| $C_{rss}$             | Reverse Transfer Capacitance | — | 46   | —  |    | $f = 1.0\text{MHz}$ , See Fig.5                                                                                                                         |
| $C_{oss}$             | Output Capacitance           | — | 2830 | —  |    | $V_{GS} = 0V, V_{DS} = 1.0V, f = 1.0\text{MHz}$                                                                                                         |
| $C_{oss}$             | Output Capacitance           | — | 510  | —  |    | $V_{GS} = 0V, V_{DS} = 32V, f = 1.0\text{MHz}$                                                                                                          |
| $C_{oss\text{ eff.}}$ | Effective Output Capacitance | — | 870  | —  |    | $V_{GS} = 0V, V_{DS} = 0V \text{ to } 32V$                                                                                                              |

**Diode Characteristics**


|          | Parameter                              | Min.                                                                        | Typ. | Max. | Units | Conditions                                                                                                                                           |
|----------|----------------------------------------|-----------------------------------------------------------------------------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current (Body Diode) | —                                                                           | —    | 87 ⑧ | A     | MOSFET symbol showing the integral reverse p-n junction diode.  |
| $I_{SM}$ | Pulsed Source Current (Body Diode) ①   | —                                                                           | —    | 350  |       |                                                                                                                                                      |
| $V_{SD}$ | Diode Forward Voltage                  | —                                                                           | —    | 1.3  | V     | $T_J = 25^\circ\text{C}, I_S = 30A^{**}, V_{GS} = 0V$ ④                                                                                              |
| $t_{rr}$ | Reverse Recovery Time                  | —                                                                           | 53   | 80   | ns    | $T_J = 25^\circ\text{C}, I_F = 30A^{**}, V_{DD} = 20V$                                                                                               |
| $Q_{rr}$ | Reverse Recovery Charge                | —                                                                           | 86   | 130  | nC    | $di/dt = 100A/\mu s$ ④                                                                                                                               |
| $t_{on}$ | Forward Turn-On Time                   | Intrinsic turn-on time is negligible (turn-on is dominated by $L_S + L_D$ ) |      |      |       |                                                                                                                                                      |

**Notes:**


- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ② Limited by  $T_{Jmax}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.52\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 30A$ ,  $V_{GS} = 10V$ . Part not recommended for use above this value.
- ③  $I_{SD} \leq 30A$ ,  $di/dt \leq 170A/\mu s$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_J \leq 175^\circ\text{C}$ .
- ④ Pulse width  $\leq 1.0\text{ms}$ ; duty cycle  $\leq 2\%$ .
- ⑤  $C_{oss\text{ eff.}}$  is a fixed capacitance that gives the same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 80%  $V_{DSS}$
- ⑥ Limited by  $T_{Jmax}$ , see Fig.12a, 12b, 15, 16 for typical repetitive avalanche performance.
- ⑦ This value determined from sample failure population. 100% tested to this value in production.
- ⑧ Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 56A.
- ⑨ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994
- ⑩  $R_\theta$  is measured at  $T_J$  approximately  $90^\circ\text{C}$ .
- \*\* All AC and DC test conditions based on former package limited current of 30A.

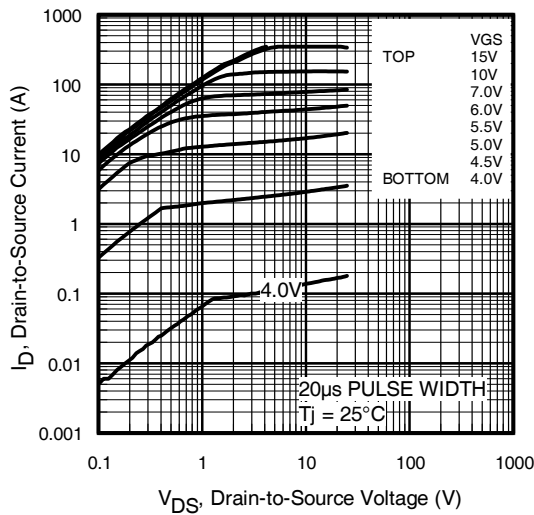


**Fig. 1** Typical Output Characteristics

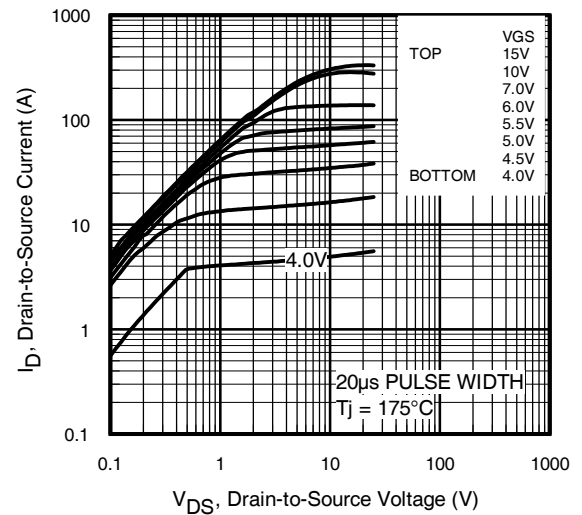


**Fig. 2** Typical Output Characteristics

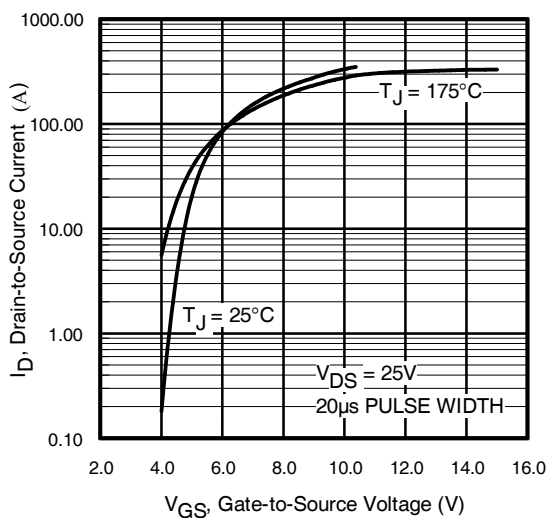


**Fig. 3** Typical Transfer Characteristics

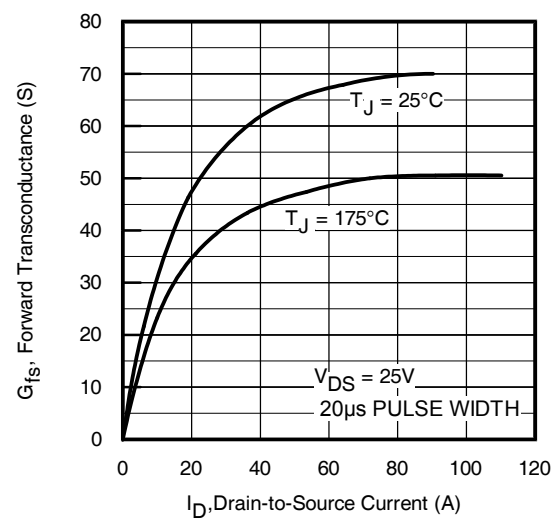


**Fig. 4** Typical Forward Trans conductance Vs. Drain Current

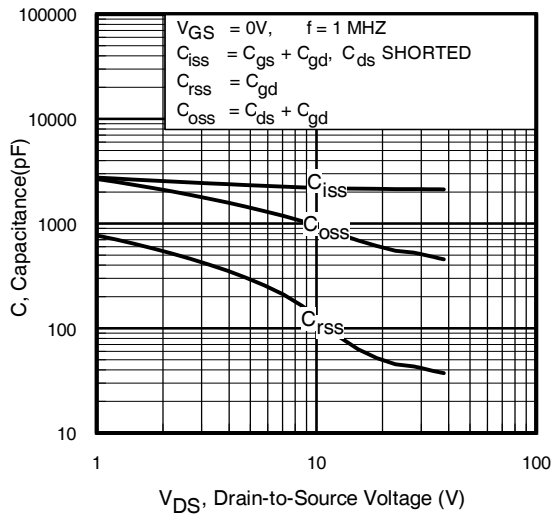


**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage

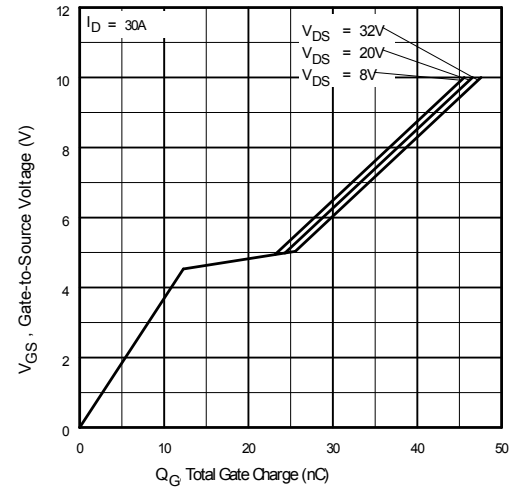


**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage

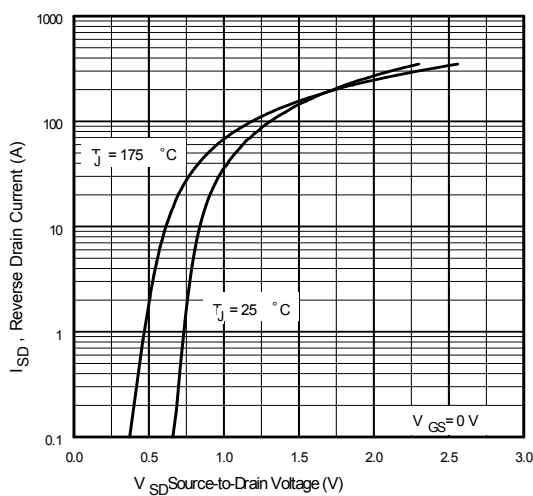


**Fig. 7** Typical Source-to-Drain Diode Forward Voltage

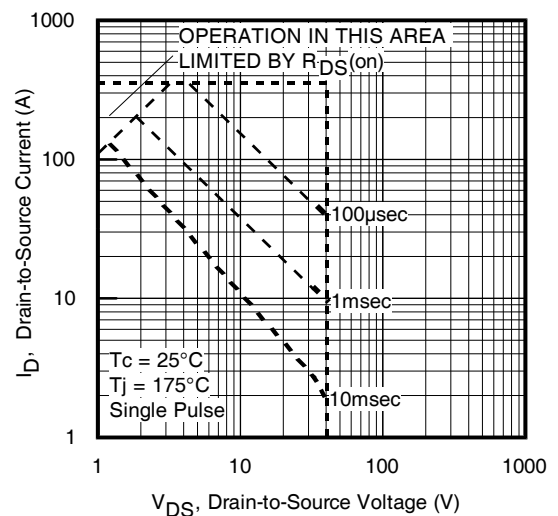


**Fig 8.** Maximum Safe Operating Area

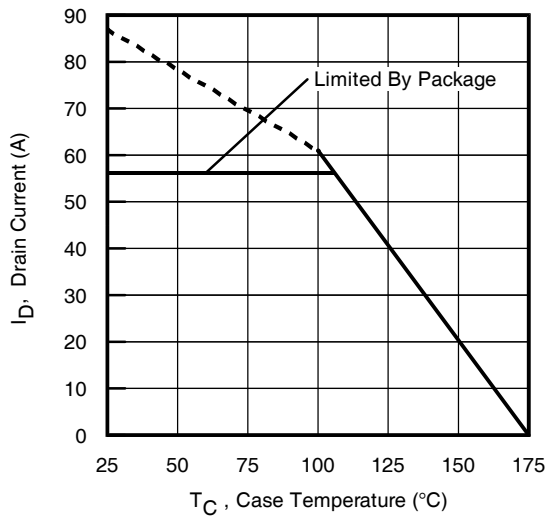

**Fig 9.** Maximum Drain Current Vs. Case Temperature

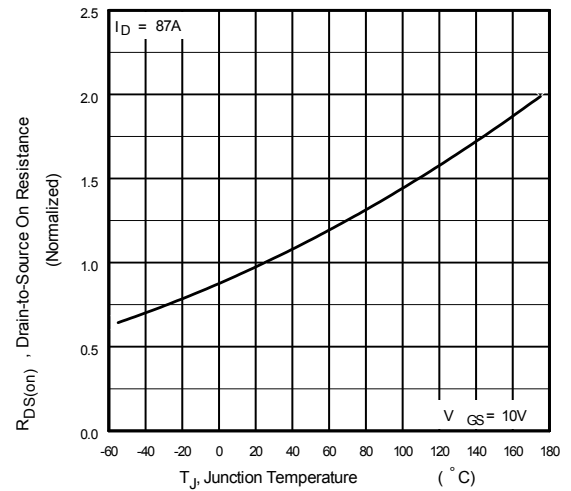

**Fig 10.** Normalized On-Resistance Vs. Temperature

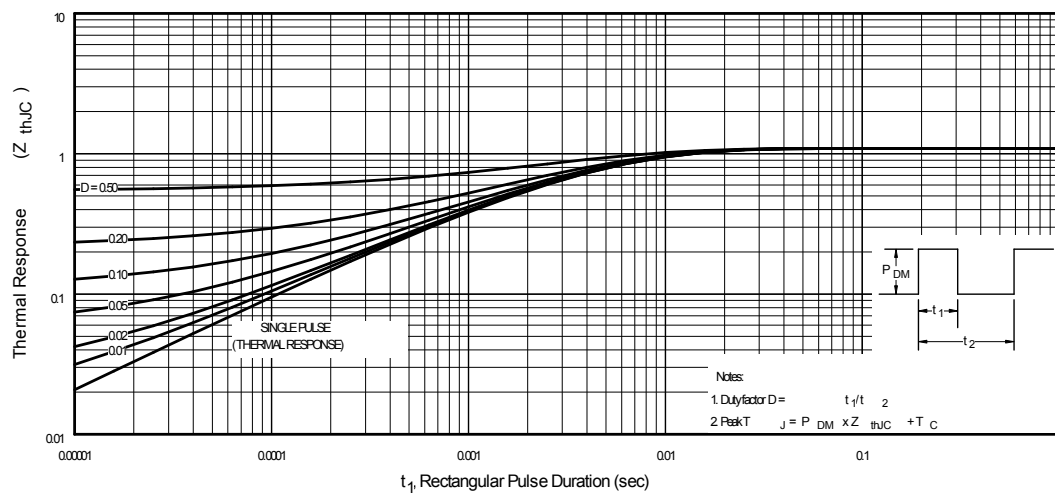

**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

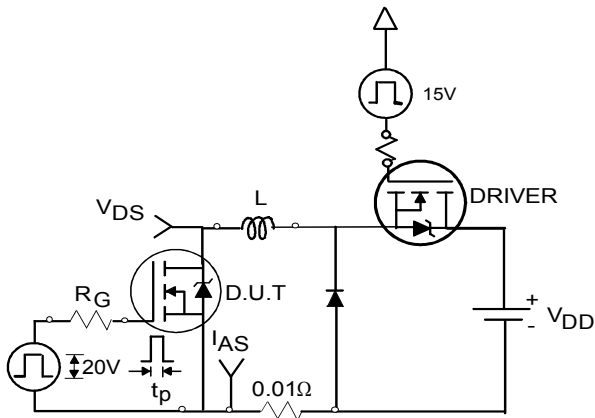


Fig 12a. Unclamped Inductive Test Circuit

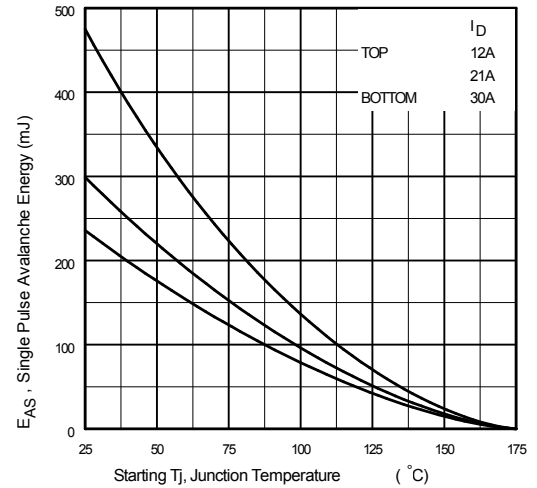


Fig 12c. Maximum Avalanche Energy vs. Drain Current

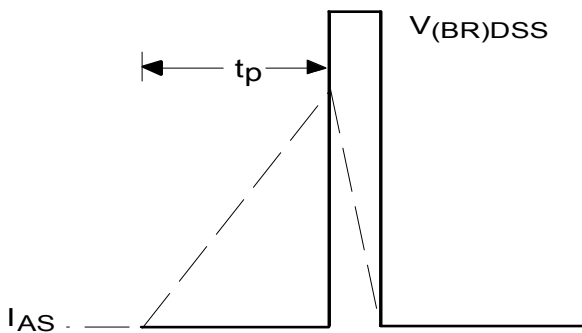


Fig 12b. Unclamped Inductive Waveforms

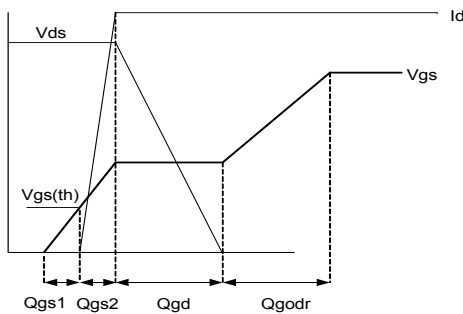


Fig 13a. Gate Charge Waveform

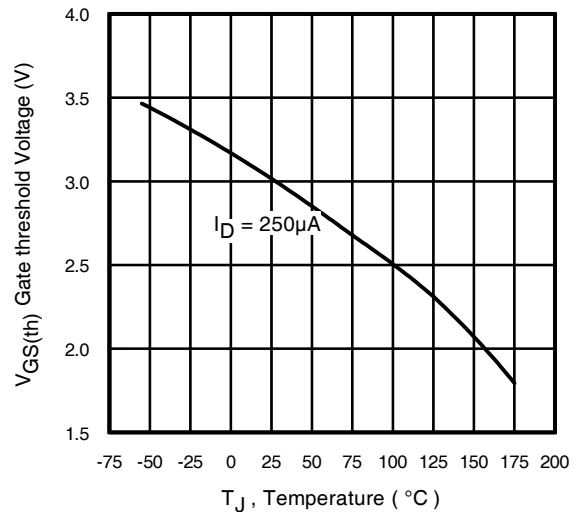


Fig 14. Threshold Voltage Vs. Temperature



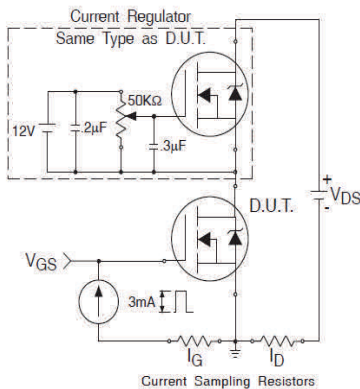


Fig 13b. Gate Charge Test Circuit

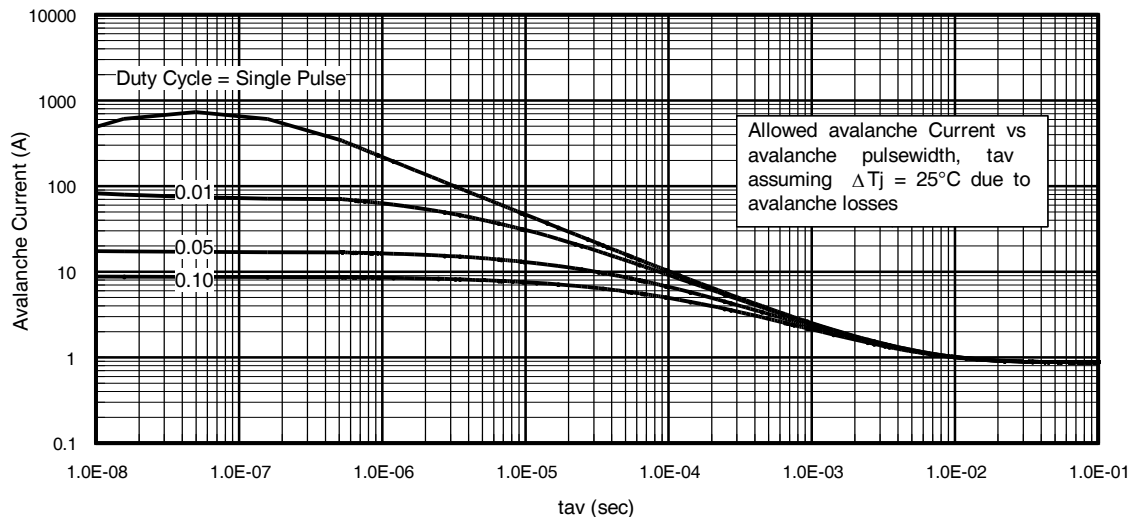

**Fig 15.** Typical Avalanche Current Vs. Pulse width

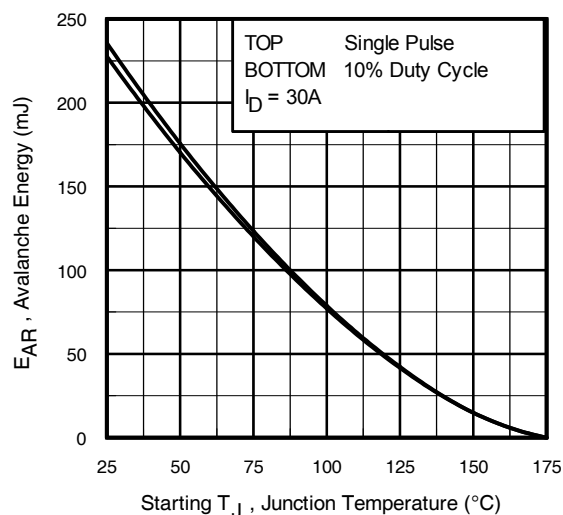

**Fig 16.** Maximum Avalanche Energy Vs. Temperature

#### Notes on Repetitive Avalanche Curves , Figures 15, 16:

(For further info, see AN-1005 at [www.infineon.com](http://www.infineon.com))


1. Avalanche failures assumption:  
Purely a thermal phenomenon and failure occurs at a temperature far in excess of  $T_{jmax}$ . This is validated for every part type.
2. Safe operation in Avalanche is allowed as long as  $T_{jmax}$  is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 12a, 12b.
4.  $P_{D(ave)}$  = Average power dissipation per single avalanche pulse.
5.  $BV$  = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6.  $I_{av}$  = Allowable avalanche current.
7.  $\Delta T$  = Allowable rise in junction temperature, not to exceed  $T_{jmax}$  (assumed as 25°C in Figure 15, 16).  
 $t_{av}$  = Average time in avalanche.  
 $D$  = Duty cycle in avalanche =  $t_{av} \cdot f$   
 $Z_{thJC}(D, t_{av})$  = Transient thermal resistance, see Figures 13)

$$P_{D(ave)} = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$


$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$

$$E_{AS(AR)} = P_{D(ave)} \cdot t_{av}$$




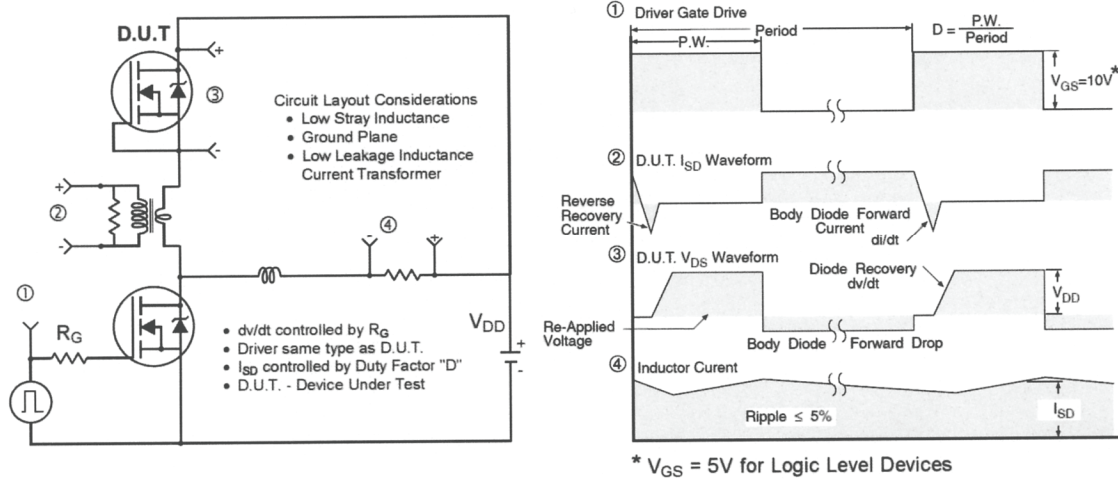

**Fig 17.** Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs

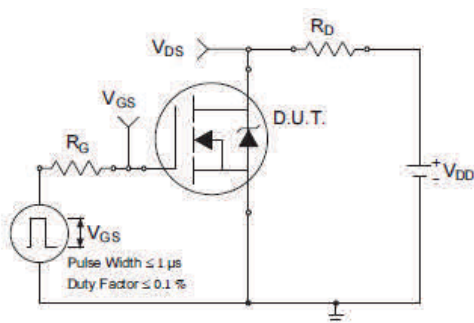


**Fig 18a.** Switching Time Test Circuit

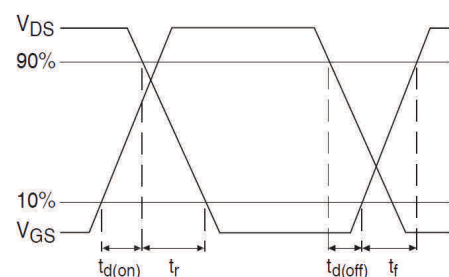

**Fig 18b.** Switching Time Waveforms

## D-Pak (TO-252AA) Package Outline (Dimensions are shown in millimeters (inches))

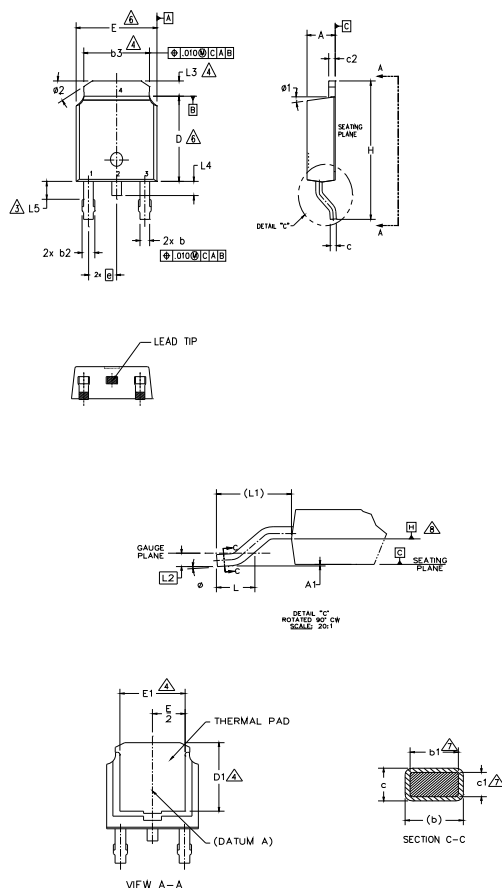

### NOTES:

- 1.- DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
- 2.- DIMENSION ARE SHOWN IN INCHES [MILLIMETERS].
- 3.- LEAD DIMENSION UNCONTROLLED IN L5.
- 4.- DIMENSION D1, E1, L3 & b3 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.
- 5.- SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .005 AND 0.10 [0.13 AND 0.25] FROM THE LEAD TIP.
- 6.- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005 [0.13] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
- 7.- DIMENSION b1 & c1 APPLIED TO BASE METAL ONLY.
- 8.- DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
- 9.- OUTLINE CONFORMS TO JEDEC OUTLINE TO-252AA.

| SYMBOL | DIMENSIONS  |       |           |      | NOTES |
|--------|-------------|-------|-----------|------|-------|
|        | MILLIMETERS |       | INCHES    |      |       |
|        | MIN.        | MAX.  | MIN.      | MAX. |       |
| A      | 2.18        | 2.39  | .086      | .094 |       |
| A1     | —           | 0.13  | —         | .005 |       |
| b      | 0.64        | 0.89  | .025      | .035 |       |
| b1     | 0.65        | 0.79  | .025      | .031 | 7     |
| b2     | 0.76        | 1.14  | .030      | .045 |       |
| b3     | 4.95        | 5.46  | .195      | .215 | 4     |
| c      | 0.46        | 0.61  | .018      | .024 |       |
| c1     | 0.41        | 0.56  | .016      | .022 | 7     |
| c2     | 0.46        | 0.89  | .018      | .035 |       |
| D      | 5.97        | 6.22  | .235      | .245 | 6     |
| D1     | 5.21        | —     | .205      | —    | 4     |
| E      | 6.35        | 6.73  | .250      | .265 | 6     |
| E1     | 4.32        | —     | .170      | —    | 4     |
| e      | 2.29 BSC    |       | .090 BSC  |      |       |
| H      | 9.40        | 10.41 | .370      | .410 |       |
| L      | 1.40        | 1.78  | .055      | .070 |       |
| L1     | 2.74 BSC    |       | .108 REF. |      |       |
| L2     | 0.51 BSC    |       | .020 BSC  |      |       |
| L3     | 0.89        | 1.27  | .035      | .050 | 4     |
| L4     | —           | 1.02  | —         | .040 |       |
| L5     | 1.14        | 1.52  | .045      | .060 | 3     |
| ø      | 0"          | 10"   | 0"        | 10"  |       |
| ø1     | 0"          | 15"   | 0"        | 15"  |       |
| ø2     | 25"         | 35"   | 25"       | 35"  |       |

### LEAD ASSIGNMENTS


### HEXFET

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN

### IGBT & CoPAK


- 1.- GATE
- 2.- COLLECTOR
- 3.- EMITTER
- 4.- COLLECTOR

## D-Pak (TO-252AA) Part Marking Information

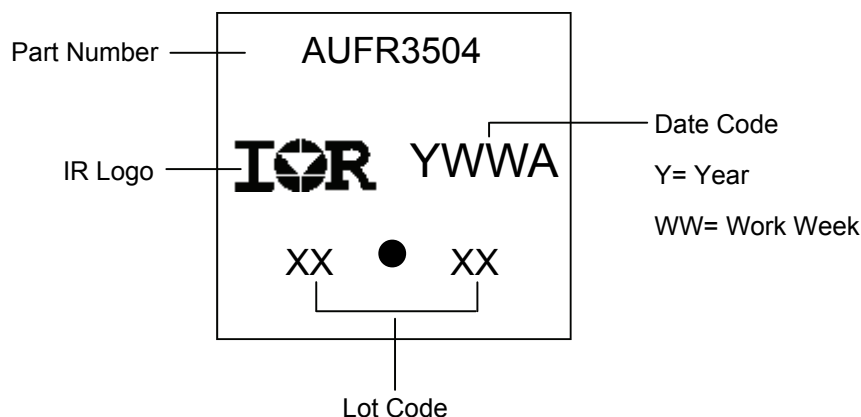


Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

**D-Pak (TO-252AA) Tape & Reel Information** (Dimensions are shown in millimeters (inches))

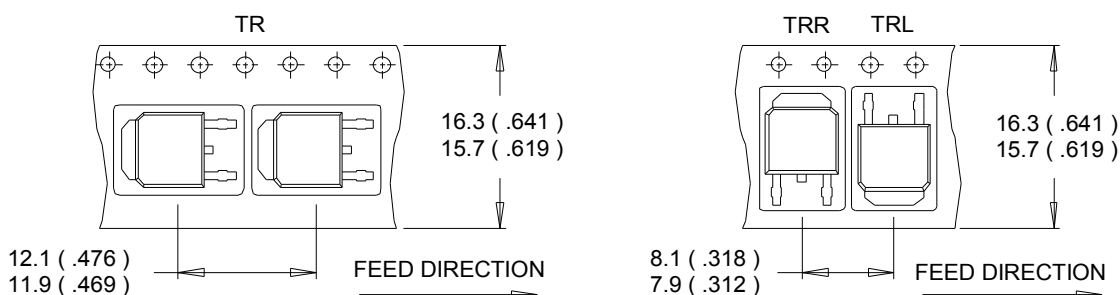

**NOTES :**

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS ( INCHES ).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

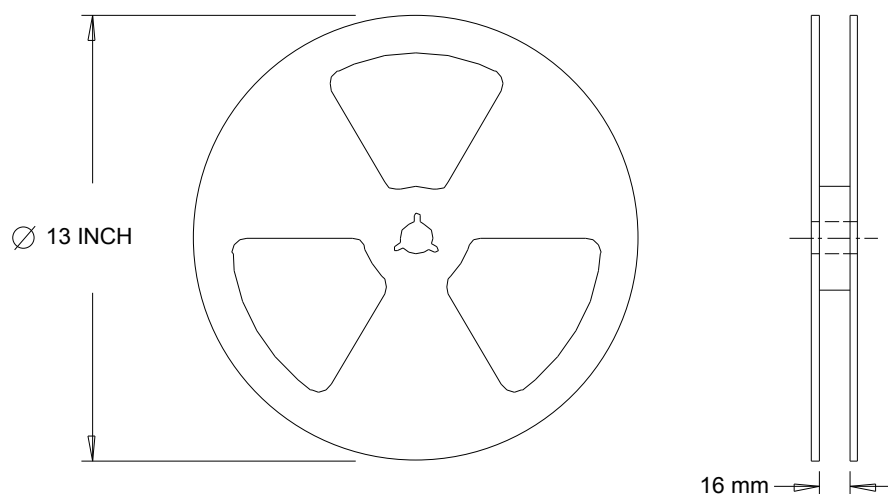

**NOTES :**

1. OUTLINE CONFORMS TO EIA-481.

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

## Qualification Information

|                                   |                      |                                                                                                                                                                               |      |
|-----------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| <b>Qualification Level</b>        |                      | Automotive<br>(per AEC-Q101)                                                                                                                                                  |      |
|                                   |                      | Comments: This part number(s) passed Automotive qualification. Infineon's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. |      |
| <b>Moisture Sensitivity Level</b> |                      | D-Pak                                                                                                                                                                         | MSL1 |
| <b>ESD</b>                        | Machine Model        | Class M4 (+/- 500V) <sup>†</sup><br>AEC-Q101-002                                                                                                                              |      |
|                                   | Human Body Model     | Class H1C (+/- 1500V) <sup>†</sup><br>AEC-Q101-001                                                                                                                            |      |
|                                   | Charged Device Model | Class C5 (+/- 2000V) <sup>†</sup><br>AEC-Q101-005                                                                                                                             |      |
| <b>RoHS Compliant</b>             |                      | Yes                                                                                                                                                                           |      |

† Highest passing voltage.

## Revision History

| Date       | Comments                                                                                                                                 |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 11/23/2015 | <ul style="list-style-type: none"> <li>Updated datasheet with corporate template</li> <li>Corrected ordering table on page 1.</li> </ul> |

## Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2015

All Rights Reserved.

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffungsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.