

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[t-Global Technology](#)

[TG-CPCB2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

TG-CPCB2 Ceramic PCB




Features

Patterned according to standard LED configurations
Superior thermal management compared to FR4 and IMPCB
Reduced cost of ownership
Reduced manufacturing complexity

Applications

t-Global's range of ceramic circuit boards are designed for use with Philip's Luxeon range of LEDs. The correct patterning for these LEDs has been applied on the surface of each board for ease of manufacture.

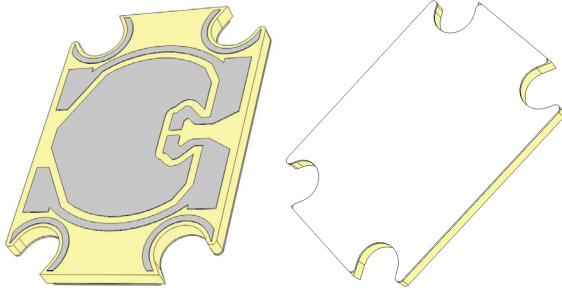

TG-CPCB2 Properties

TG-CPCB1 Property	Functional Characteristics
Substrate	Al ₂ O ₃
Thermal Conductivity	24 W/m-k
Thickness	1mm
Metal Plate Stack Up	Cu 30 microns, Au 0.2 microns