

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Digi International](#)  
[JD2D3-CDL-A](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Top View

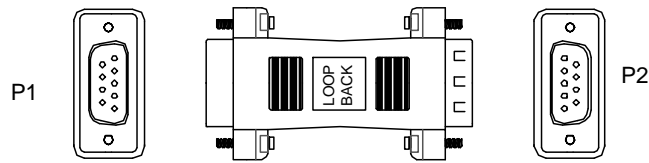

Bottom View

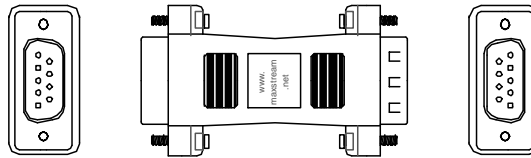

Poly Bag Label

Serial Loopback Tester  
JD2D3-CDL-A  
www.maxstream.net

← Arial font

**Pinout Specification:**

P1      P2  
2,3 ----- NC  
7,8 ----- NC  
1,4,6 --- NC

NC ----- 2,3  
NC ----- 7,8  
NC --- 1,4,6

**Specifications:**

**P1:** D-Subminiature 9 Female Connector Molded  
Shell: Steel Tin Plated  
Insert: Thermoplastic, Black  
Pin Contacts: Gold flash on mating end

**P2:** D-Subminiature 9 Male Connector Molded  
Shell: Steel Tin Plated  
Insert: Thermoplastic, Black  
Pin Contacts: Gold flash on mating end

**C1: Cable Specifications**

Conductors: 6  
Conductor Gauge: 28 awg stranded (7x36)  
Conductor Insulation: PVC  
Outer Shield: Aluminum/Mylar Foil  
Adapter Color: Red

**Special Notes:**

1. Refer to shielding specification STDSHLD.dwg.
2. All text inserts and labels must use Arial font
3. Each adapter must be individually packaged in a poly bag with label shown above. Poly bag must have "Made in China" printed on the bag

DO NOT SCALE DRAWINGS FOR DIMENSIONS

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

Property of: <b>MaxStream, Inc.</b> Orem, Utah, USA	Part Description: Serial Loopback Tester, DB9 M-F, Red, JD2D3-CDL-A		Date: 28 JAN 03	Part Number: JD2D3-CDL-A
	Drawn By: Scott Yergensen	Approved By:	Revision #: 1	Drawing Number JD2D3-CDL-A.dwg