

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1775596](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

HC-B 16-TFL-76/M1PG29S

Order No.: 1775596



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775596>

Sleeve housing, for single locking latch, height 76 mm, with screw connection, 1x Pg29, lateral cable entry

Commercial data	
EAN	4017918038175
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.35666 KG
Catalog page information	Page 488 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	76 mm
Width	43 mm
Length	94 mm

HC-B 16-TFL-76/M1PG29S Order No.: 1775596

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775596>

Housing type	Sleeve housings
Locking type	for single locking latch
Type of the screw connection	1x Pg29
Pg screw connection	With
Wrench size, union nut	37 mm
Cable exit	Lateral
External cable diameter	18 mm ... 27 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

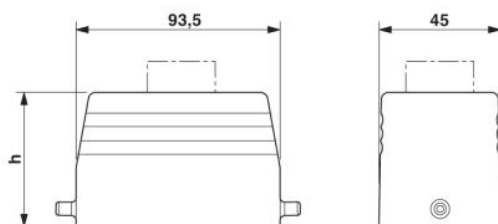

HC-B 16-TFL-76/M1PG29S Order No.: 1775596

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775596>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;