

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1804917](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## PC 4/ 3-ST-7,62

Order No.: 1804917

The figure shows a 5-pos. version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>

Plug component, Nominal current: 20 A, Nom. voltage: 400 V, Pitch: 7.62 mm, Number of positions: 3, Connection type: Screw connection, Color: green

| Commercial data          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918046354      |
| Pack                     | 50 pcs.            |
| Customs tariff           | 85366990           |
| Weight/Piece             | 0.012935 KG        |
| Catalog page information | Page 366 (CC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
09/08/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| Dimensions / positions |          |
|------------------------|----------|
| Pitch                  | 7.62 mm  |
| Dimension a            | 15.24 mm |
| Number of positions    | 3        |
| Screw thread           | M3       |

PC 4/ 3-ST-7,62 Order No.: 1804917

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>

|                        |        |
|------------------------|--------|
| Tightening torque, min | 0.5 Nm |
| Tightening torque max  | 0.6 Nm |

**Technical data**

|                                    |                   |
|------------------------------------|-------------------|
| Insulating material group          | I                 |
| Rated surge voltage (III/3)        | 6 kV              |
| Rated surge voltage (III/2)        | 6 kV              |
| Rated surge voltage (II/2)         | 6 kV              |
| Rated voltage (III/2)              | 630 V             |
| Rated voltage (II/2)               | 1000 V            |
| Connection in acc. with standard   | EN-VDE            |
| Nominal current $I_N$              | 20 A              |
| Nominal voltage $U_N$              | 400 V             |
| Nominal cross section              | 4 mm <sup>2</sup> |
| Maximum load current               | 20 A              |
| Insulating material                | PA                |
| Inflammability class acc. to UL 94 | V0                |
| Internal cylindrical gage          | A4                |
| Stripping length                   | 7 mm              |

**Connection data**

|  |                      |
|--|----------------------|
| Conductor cross section solid min.   | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.   | 4 mm <sup>2</sup>    |
| Conductor cross section stranded min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.                                      | 4 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 4 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.    | 4 mm <sup>2</sup>    |
| Conductor cross section AWG/kcmil min.                                     | 24                   |
| Conductor cross section AWG/kcmil max                                      | 10                   |
| 2 conductors with same cross section, solid min.                           | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid max.                           | 2.5 mm <sup>2</sup>  |

PC 4/ 3-ST-7,62 Order No.: 1804917

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>

|   |                      |
|---|----------------------|
| 2 conductors with same cross section, stranded min.                                     | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max.                                     | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 2.5 mm <sup>2</sup>  |

### Certificates / Approvals



Certification

BV, CSA, CUL, GOST, RS, UL

#### CSA

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 20 A  |
| AWG/kcmil             | 28-10 |

#### CUL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 600 V |
| Nominal current $I_N$ | 5 A   |
| AWG/kcmil             | 30-10 |

#### UL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 600 V |
| Nominal current $I_N$ | 5 A   |
| AWG/kcmil             | 30-10 |

PC 4/ 3-ST-7,62 Order No.: 1804917

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>
**Accessories**

| Item                | Designation              | Description   |
|---------------------|--------------------------|---|
| <b>General</b>      |                          |   |
| 1837227             | KGG-PC 4/ 3              | Cable housing, Pitch: 7.62 mm, Number of positions: 3, Dimension a: 24.66 mm, Color: green  |
| 1837324             | KGG-PC 4/ 3-F            | Cable housing, Pitch: 7.62 mm, Number of positions: 3, Dimension a: 24.66 mm, Color: green  |
| 1837256             | KGS-PC 4/ 6              | Cable housing, Pitch: 7.62 mm, Number of positions: 6, Dimension a: 47.52 mm, Color: green  |
| 1837353             | KGS-PC 4/ 6-F            | Cable housing, Pitch: 7.62 mm, Number of positions: 6, Dimension a: 47.52 mm, Color: green  |
| <b>Marking</b>      |                          |   |
| 0804549             | SK 7,62/3,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 1-10, 11-20 etc. up to 91-99, sufficient for 120 terminal blocks |
| <b>Plug/Adapter</b> |                          |   |
| 1600027             | CP-HCC 4                 | Coding profile, Color: red  |
| <b>Tools</b>        |                          |   |
| 1205053             | SZS 0,6X3,5              | Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm <sup>2</sup> connection cross section, blade: 0.6 x 3.5 mm, without VDE approval                    |


**Additional products**

| Item           | Designation     | Description   |
|----------------|-----------------|---|
| <b>General</b> |                 |   |
| 1849998        | PCVK 4-7,62     | Plug component, Nominal current: 20 A, Nom. voltage: 500 V, Pitch: 7.62 mm, Number of positions: 1, Width: 7.62 mm, Connection type: Screw connection, Color: green |
| 1876246        | PCVK 4-7,62-PE  | Plug component, Nom. voltage: 500 V, Pitch: 7.62 mm, Number of positions: 1, Width: 7.62 mm, Connection type: Screw connection, Color: green-yellow                 |
| 1838381        | UPCV3K 4-G-7,62 | Header, Nominal current: 20 A, Nom. voltage: 800 V, Pitch: 7.62 mm, Number of positions: 1, Width: 7.62 mm, Connection type: Screw connection, Color: gray          |


PC 4/ 3-ST-7,62 Order No.: 1804917  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>

**Diagrams/Drawings**

Diagram

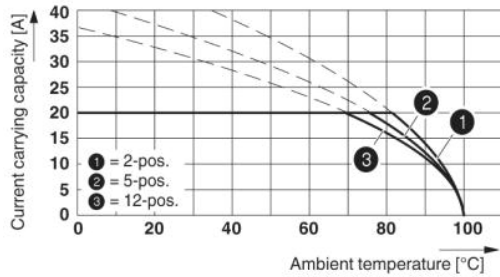


Derating curve for: PC 4/...-ST-7,62 with PC 4/...-G-7,62

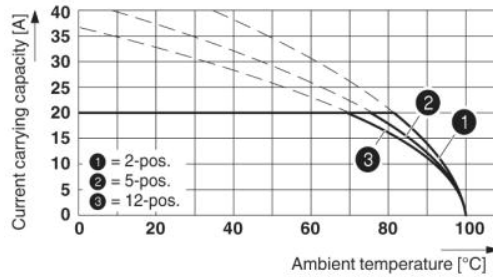

Derating curve for: PC 4/...-ST-7,62 with PCV 4/...-G-7,62

Dimensioned drawing

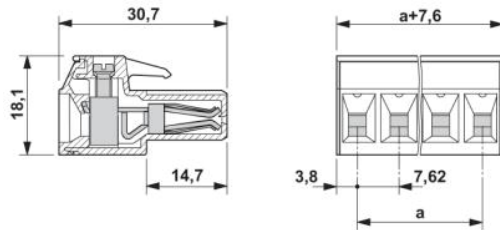

PC 4/ 3-ST-7,62 Order No.: 1804917

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804917>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;