

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1844281](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

MC 1,5/ 9-G-3,5

Order No.: 1844281

The figure shows a 10-position version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1844281>

Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.5 mm,
Number of positions: 9, Color: green, Assembly: Soldering

Commercial data

EAN	4017918113322
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.002463 KG
Catalog page information	Page 174 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	9.2 mm
Height	11.1 mm
Pitch	3.5 mm
Dimension a	28 mm
Number of positions	9

MC 1,5/ 9-G-3,5 Order No.: 1844281

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1844281>

Pin dimensions	0,8 x 0,8 mm
Hole diameter	1.2 mm

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Nominal voltage U_N	160 V
Maximum load current	8 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

Certificates / Approvals


Certification

CB, CSA, CUL, GOST, UL, VDE-PZI

CSA

Nominal voltage U_N	300 V
Nominal current I_N	8 A

CUL

Nominal voltage U_N	300 V
Nominal current I_N	8 A

UL

Nominal voltage U_N	300 V
Nominal current I_N	8 A

MC 1,5/ 9-G-3,5 Order No.: 1844281

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1844281>
Accessories

Item	Designation	Description
------	-------------	-------------

General

1841161	MC 1,5/10-LWL 1,5-3,5	Fiber optics, Pitch: 3.5 mm, Number of positions: 10, Dimension a: 1.5 mm, Color: transparent
1841187	MC 1,5/10-LWL 2,3-3,5	Fiber optics, Pitch: 3.5 mm, Number of positions: 10, Dimension a: 2.3 mm, Color: transparent
1841200	MC 1,5/10-LWL 4-3,5	Fiber optics, Pitch: 3.5 mm, Number of positions: 10, Dimension a: 4 mm, Color: transparent

Marking

0804073	SK 3,5/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks
---------	-------------------------	--

Plug/Adapter

1734634	CP-MSTB	Keying profile, is inserted into the slot on the plug or inverted header, red insulating material
---------	---------	---

Additional products

Item	Designation	Description
------	-------------	-------------

General


1840434	MC 1,5/ 9-ST-3,5	Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.5 mm, Number of positions: 9, Connection type: Screw connection, Color: green
1863220	MCVR 1,5/ 9-ST-3,5	Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.5 mm, Number of positions: 9, Connection type: Screw connection, Color: green
1862920	MCVW 1,5/ 9-ST-3,5	Plug component, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.5 mm, Number of positions: 9, Connection type: Screw connection, Color: green

MC 1,5/ 9-G-3,5 Order No.: 1844281


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1844281>

Diagrams/Drawings


Drilling plan/solder pad geometry

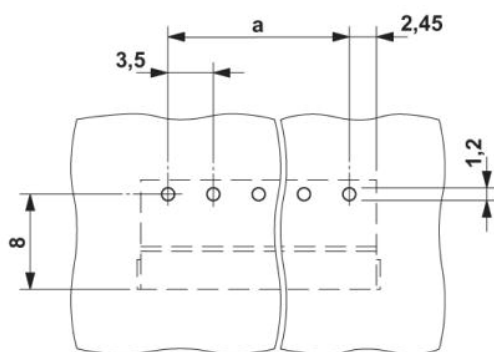

Diagram

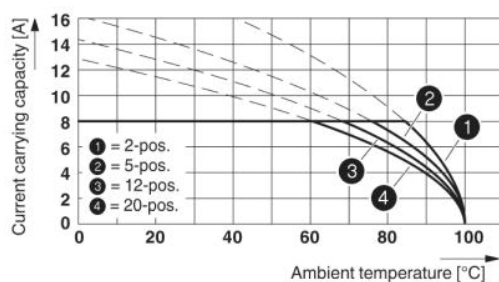

Dimensioned drawing

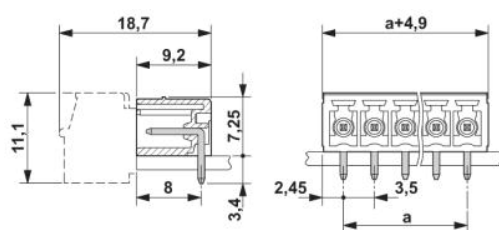

MC 1,5/ 9-G-3,5 Order No.: 1844281

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1844281>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;