

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2281571](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)




Extract from the online catalog

## FLKMS 34

Order No.: 2281571

The illustration shows a 50-pos. version

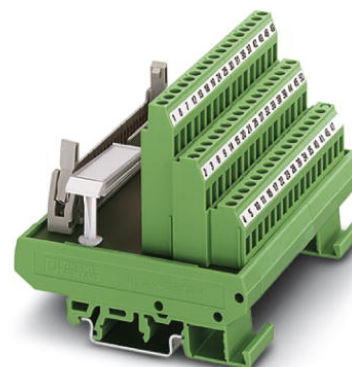

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2281571>

VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 34-pos.

### Commercial data

EAN	4017918054823
Pack	5 pcs.
Customs tariff	85369010
Weight/Piece	0.19052 KG
Catalog page information	Page 243 (IF-2007)

### Product notes

WEEE/RoHS-compliant since:  
08/10/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	< 50 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Number of positions	34

**FLKMS 34** Order No.: 2281571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2281571>

Width	79 mm
Height	72 mm
Depth	77 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	Flat-ribbon cable connection
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	34

**Certificates / Approvals**


Certification

GOST

FLKMS 34 Order No.: 2281571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2281571>

**Accessories**

Item	Designation	Description
<b>Cable/conductor</b>		
2299479	FLK 34/EZ-DR/ 50/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 0.5 m
2299482	FLK 34/EZ-DR/ 100/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1 m
2299495	FLK 34/EZ-DR/ 150/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 1.5 m
2299505	FLK 34/EZ-DR/ 200/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 2 m
2299518	FLK 34/EZ-DR/ 300/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 3 m
2299521	FLK 34/EZ-DR/ 400/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 4 m
2299534	FLK 34/EZ-DR/ 600/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 6 m
2299547	FLK 34/EZ-DR/ 800/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 8 m
2299550	FLK 34/EZ-DR/1000/KONFEK	Round cable set, with two 34-pos. socket strips (1:1 connection), cable length: 10 m
2295059	FLK EZ-DR.../.../...	Round cable, with preassembly, not shielded, variable cable length

FLKMS 34 Order No.: 2281571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2281571>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;