

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2702241](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Extract from the online catalog

TRKS 4 OG

Order No.: 2702241

The illustration shows versions TRKS 4 and TRKDSD 4 in orange

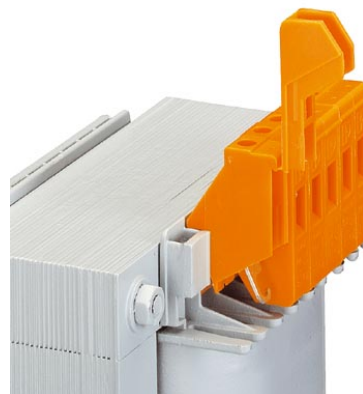

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702241>

Transformer terminal block, single terminal block version

Commercial data

EAN	4017918060640
Pack	50 Pcs.
Customs tariff	85369010
Weight/Piece	0.003988 KG
Catalog page information	Page 316 (CL-2002)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Note	For transformers on ships, saltwater-proof DIN rails must be used according to the regulations of Germanic Lloyd. This requirement is fulfilled by all rail designs.
Number of connections	2
Color	orange
Insulating material	PA

TRKS 4 OG Order No.: 2702241

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702241>

Inflammability class acc. to UL 94	V2
Dimensions	
Width	7.5 mm
Length	32 mm
Height	19.2 mm
Technical data	
Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Connection in acc. with standard	IEC / EN
Nominal current I_N	30 A
Nominal voltage U_N	(voltage data only possible in conjunction with transformer)
Connection data	
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	6 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	4 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.2 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm ²

TRKS 4 OG Order No.: 2702241

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702241>

2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	2.5 mm ²
Type of connection	Screw connection
Stripping length	8 mm
Internal cylindrical gage	A4
Screw thread	M 3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm

Certificates / Approvals

Approval logo



CSA

Nominal voltage U _N	600 V
Nominal current I _N	30 A
AWG/kcmil	28-10

CUL

Nominal voltage U _N	600 V
Nominal current I _N	30 A
AWG/kcmil	30-10

UL

Nominal voltage U _N	600 V
Nominal current I _N	30 A
AWG/kcmil	30-10
Certification	CCA, CSA, CUL, ESTI, GOST, LR, PRS, RS, UL

TRKS 4 OG Order No.: 2702241

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702241>

Accessories


Item	Designation	Description
------	-------------	-------------

Assembly

3000308	ATP-TRKS	Partition plate, for visual and electrical separation of neighboring terminal blocks, width: 7.5 mm, color: Gray
---------	----------	--

Drawings

Dimensioned drawing

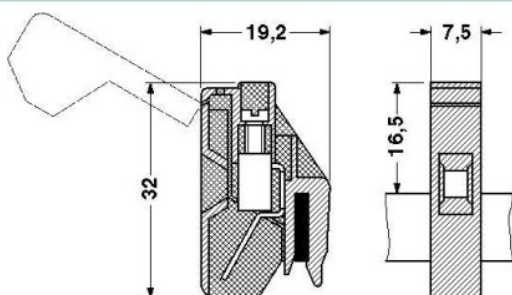

TRKS 4 OG Order No.: 2702241

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2702241>

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;