

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2944229](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## EMG 10-OV- 24DC/24DC/1

Order No.: 2944229

The illustration shows version EMG 10-OV, with DC voltage output, max. 1 A



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944229>

Power optocoupler, with light indicator and protection circuits in the input and output circuits, input: 24 V DC, output: 5-36 V DC/ max. 1 A

Commercial data	
EAN	4017918081522
Pack	10 pcs.
Customs tariff	85364190
Weight/Piece	0.03935 KG
Catalog page information	Page 128 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
04/01/2007



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Input data	
Nominal input voltage $U_N$	24 V DC
Input voltage range in reference to $U_N$	0.9 ... 1.1
Switching threshold "0" signal, voltage	$\leq 8$ V
Switching threshold "0" signal in reference to $U_N$	$\leq 0.21$
Switching threshold "1" signal voltage	$\geq 12$ V

EMG 10-OV- 24DC/24DC/1 Order No.: 2944229

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944229>

Switching threshold "1" signal in reference to $U_N$	$\geq 0.9$
Typical input current at $U_N$	4.4 mA
Typical response time	0.1 ms
Typical turn-off time	0.2 ms
Status display	Yellow LED
Name of protection	Polarity protection
Protective circuit/component	Polarity protection diode
Transmission frequency	500 Hz

**Output data**

Output nominal voltage	24 V DC
Output nominal voltage range	5 V DC ... 36 V DC
Limiting continuous current	1 A
Surge current	2 A (t = 1 s)
Peak offstate voltage	45 V DC (Collector-emitter reverse voltage)
Voltage drop at max. limiting continuous current	$\leq 1$ V
Output circuit	2-conductor floating
Name of protection	Polarity protection
Protective circuit/component	Polarity protection diode

**Connection data**

Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

**General data**

Width	10 mm
Height	102 mm
Depth	75 mm
Test voltage input/output	3.5 kV AC
Ambient temperature (operation)	-20 °C ... 50 °C

EMG 10-OV- 24DC/24DC/1 Order No.: 2944229

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944229>

Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Degree of protection	IP20
Inflammability class in acc. with UL 94 (housing)	V0
Standards/regulations	DIN VDE 0110
Rated surge voltage / insulation	Basic insulation

### Certificates / Approvals



Certification GOST

### Accessories


Item	Designation	Description
------	-------------	-------------

### Marking

2947585	EMG-SGKS 10	Equipment marker, narrow
---------	-------------	--------------------------

### Diagrams/Drawings


Diagram

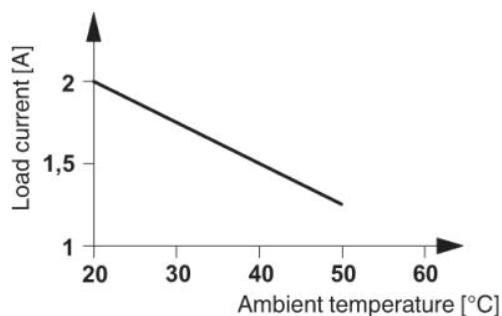

EMG 10-OV- 24DC/24DC/1 Order No.: 2944229

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944229>

Circuit diagram

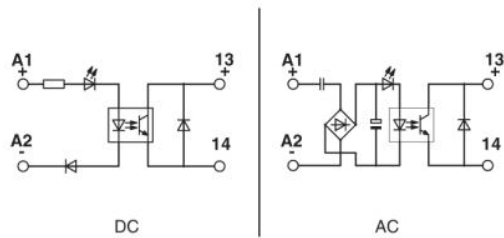

EMG 10-OV- 24DC/24DC/1 Order No.: 2944229

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2944229>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;