

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2970565](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## UMKS- C64M-VS

Order No.: 2970565

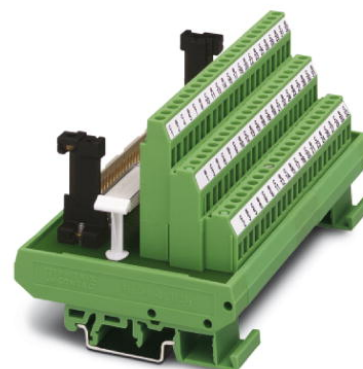

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970565>

VARIOFACE module, for IEC 603/DIN 41612 plug connector, type C, 64-pos., a, c components mounted, with male connector, cable housing with screw interlock

Commercial data	
EAN	4017918087753
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.3432 KG
Catalog page information	Page 290 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
11/06/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	1 A
Number of positions	64
Width	135 mm

**UMKS- C64M-VS** Order No.: 2970565

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970565>

Height	72 mm
Depth	77 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	IEC 603/DIN 41612 connection
Type of connection	Pluggable

**Certificates / Approvals**


Certification

GOST

UMKS- C64M-VS Order No.: 2970565

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970565>

---

#### Address

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;