

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions](#)
[5ML1-E1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


MICRO SWITCH

A DIVISION OF HONEYWELL REGULATORY COMPANY,
 FREEPORT, ILLINOIS
 FED. MFR. CODE 91929

SWITCH - ENCLOSED

5ML1-E1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

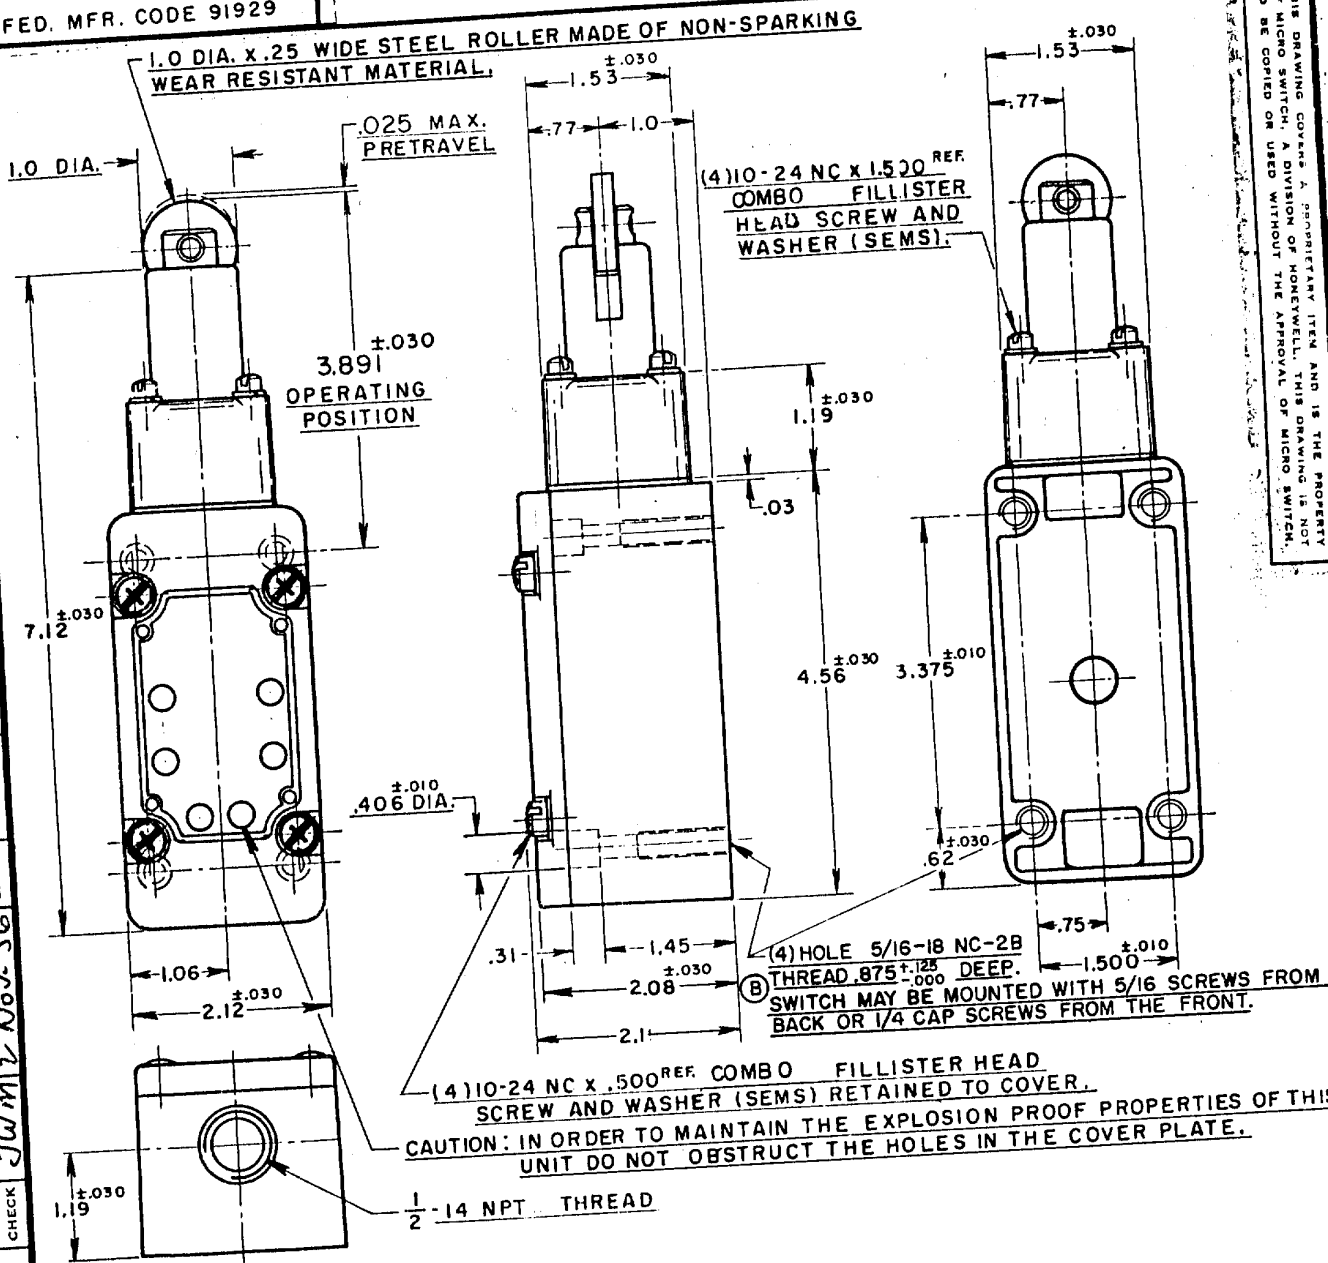

NOTE:

1. ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN.
2. IT IS ESSENTIAL THAT THE CONDUIT OPENING BE PROPERLY SEALED IN ORDER TO MAINTAIN THE EXPLOSION PROOF PROPERTIES.
3. LISTED BY UNDERWRITERS LABORATORY, INC. FOR USE IN CLASS I GROUPS C AND D VAPOR-AIR ATMOSPHERES, AND CLASS 2 GROUPS E, F AND G DUST-AIR ATMOSPHERES.

CHARACTERISTICS

OPERATING FORCE ——— 6 LBS. APPROX.
 RELEASE FORCE ——— 4 LBS. APPROX.
 DIFFERENTIAL TRAVEL ——— .005 MAX.
 OVERTRAVEL ——— .500 MIN.
 SWITCH-BASIC REPLACEMENT ——— IMKI

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S. P. D. T.

20 A-120, 240 OR 480 VAC; 3/4 H.P.-120 VAC
 1 1/2 H.P.-240 VAC; 1/2 A-115 VDC; 1/4 A-230 VDC
 PILOT DUTY: 720 VA-HEAVY DUTY
 600 VAC MAX.

(A)
 (C)
 (D)



SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES

TOLERANCES ARE:
 ONE PLACE (.0) ±.030
 TWO PLACE (.00) ±.015
 THREE PLACE (.000) ±.005
 ANGLES ±

WEIGHT