

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
10BS211](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

MICRO SWITCH
 a Honeywell Division


SWITCH - BASIC

CATALOG LISTING

10BS211

FED. MF6 CODE 91929

CATALOG LISTING
 10BS211
 PAGE 1 OF 1
 ISSUE 12
 REVISIONS
 A 205627
 CSL 22 MAY 02
 CHECK
 22 MAY 02
 CHECK
 SAV
 CHECK
 22 MAY 02
 CHECK
 RASTER DRAWN
 CSL 22 MAY 02
 RELEASE NO. PR-2484
 REPLACES

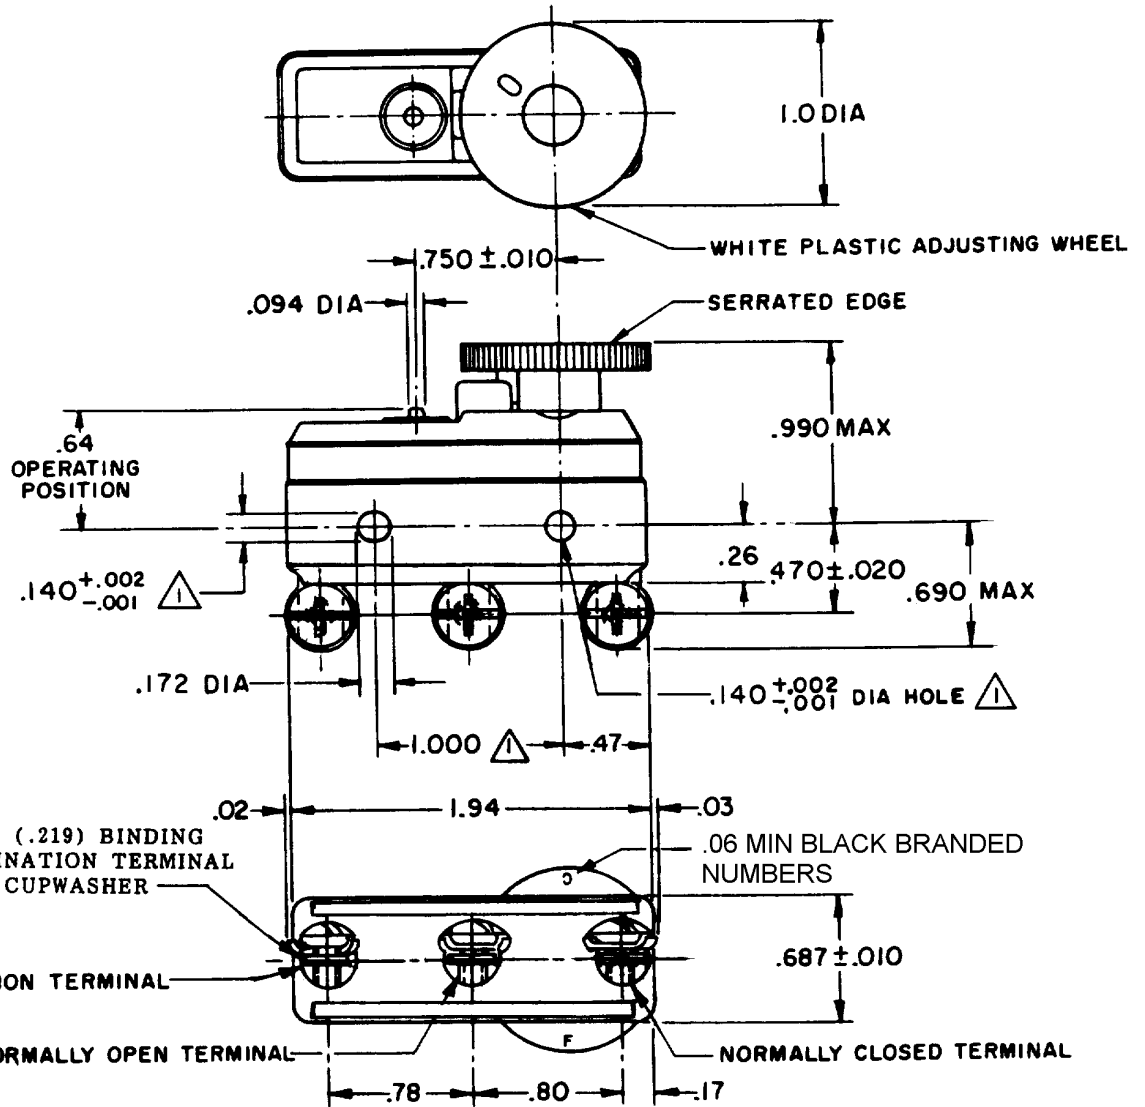


NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - DIAL WHEEL IS SHOWN AT THE MAX SETTING OF BREAK DISTANCE
- 3 - DIAL WHEEL ROTATION 300°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL | DO NOT SCALE PRINT |
|--|--|---|--------------------|
| AT MIN SETTING OPERATING FORCE ----- 11-20 OZ RELEASE FORCE ----- 10 OZ MIN DIFFERENTIAL TRAVEL ----- .0015-.0025 | CONTACT ARRANGEMENT S P D T | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 | ANGLES ± |
| AT MAX SETTING DIFFERENTIAL TRAVEL ----- .007 MIN OVERTRAVEL ----- .010 MIN | L17 20A 125, 250 OR 480 VAC 3/4HP 125 VAC, 1 1/2HP 250 VAC | | |
| | | WEIGHT | |

