

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)
[ECY-39RH153KV](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Panasonic

Multilayer Ceramic Capacitors(Wide-width Type)

Multilayer Ceramic Capacitors (Wide-width Type)

Series: **ECY**



■ Features

- Low ESL
- Ideal for High-speed MPU power supply stability and noise filtering
- RoHS compliant

■ Handling Precautions

See Page 48 to 53


■ Recommended Applications

- Stabilizes power supply voltage for High-speed MPU and noise filtering circuitry.


■ Packaging Specifications

See Page 45, 46, 56

■ Explanation of Part Numbers

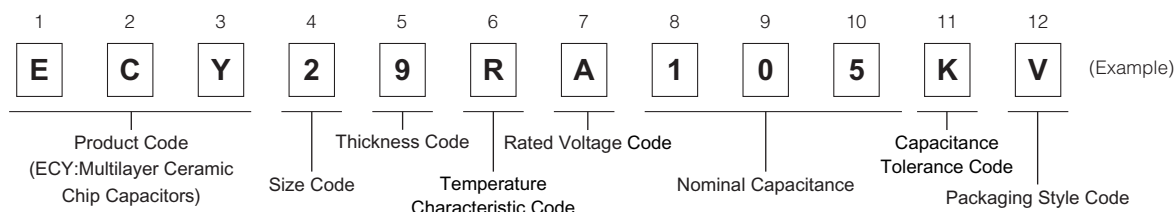


■ Construction



No	Name	
①	Ceramic dielectric	
②	Internal electrode	
③	Terminal electrode	Substrate electrode
④		Intermediate electrode
⑤		External electrode

■ Dimensions in mm (not to scale)



Size Code	Size (EIA)	L	W	T	L ₁ , L ₂
2	0508	1.25±0.10	2.0±0.1	0.85±0.10	0.3±0.2
3	0612	1.60±0.15	3.20±0.15	0.85±0.10	0.3±0.2
		1.6±0.2	3.2±0.2		

■ Packaging Styles and standard Packaging Quantity

Quantity : pcs. / reel

Packaging Style Code	Size	0508	0612
V	180 reel	Paper taping (Pitch : 4 mm)	4,000

■ Temperature Characteristics

- Class 2

Temperature Characteristic Code	Temperature Characteristics	Capacitance Change	Measurement Temperature Range	Reference Temperature
R	X5R	±15 %	-55 to 85 °C	25 °C

■ Rated Voltage

Rated Voltage Code	H	E	C	A	J
Rated Voltage	DC 50 V	DC 25 V	DC 16 V	DC 10 V	DC 6.3 V

Panasonic

Multilayer Ceramic Capacitors(Wide-width Type)

■ Nominal Capacitance

Ex.	103	104	105	106
Nominal capacitance	10,000 pF (0.01 μ F)	100,000 pF (0.1 μ F)	1,000,000 pF (1 μ F)	10,000,000 pF (10 μ F)

■ Capacitance Tolerance

Class	Temperature Characteristics	Capacitance Tolerance Code	Capacitance Tolerance
2	X5R	K	± 10 %
		M	± 20 %

■ Specifications and Testing Methods

Item	Specification	Test Method
Operating Temperature Range	-55 to 85 °C	—
Dielectric Withstanding Voltage	No dielectric breakdown and/or damage	Test voltage: Rated voltage $\times$ 250 % Duration: 1 to 5 s. Charge/discharge current: 50 mA max.
Insulation Resistance (IR)	10000 M Ω or 500/C(M Ω) whichever is less. Note:100/C (M Ω) min. for DC 10 V max. C:Nominal Cap. in μ F	Measuring voltage: Rated voltage Duration: 60 $\pm$ 5 s Charge/discharge current: 50 mA max.
Capacitance	Within the specified tolerance	Measuring temperature: 20 $\pm$ 2 °C
Dissipation Factor (tan δ)	DC 50 V, DC 25 V, and DC 16 V: 0.025 max. DC 10 V: 0.05 max. DC 6.3 V: 0.15 max.	Preconditioning: The capacitors shall be kept in temperature of 150 $\pm$ 10 °C for 1 hour and subjected to standard condition* 48 $\pm$ 4 hours before initial measurement.
		Measuring frequency 1 KHz $\pm$ 10 %
		Measuring voltage 1.0 $\pm$ 0.2 Vrms

*Standard condition : Temperature 15 to 35 °C, Relative humidity 45 to 75 %
For further information, see the technical specifications.

■ Standard Products for EIA Size "0508", Taped Version

● Class 2

◆ Temperature Characteristic Code : R (Temperature Characteristics : X5R)

Rated Voltage		DC 50 V			DC 25 V			DC 10 V		
Capacitance (μ F)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
0.01	± 10 % (K)	ECY29RH103□V	0.85	○						
0.1	or				ECY29RE104□V	0.85	○			
1	± 20 % (M)							ECY29RA105□V	0.85	○

□: Capacitance tolerance code : "□" for "K" or "M"

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel

Avoid flow soldering.

■ Standard Products for EIA Size "0612", Taped Version

● Class 2

◆ Temperature Characteristic Code : R (Temperature Characteristics : X5R)

Rated Voltage		DC 50 V			DC 16 V			DC 6.3 V		
Capacitance (μ F)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
0.1	± 10 % (K)	ECY39RH104□V	0.85	○						
1	or				ECY39RC105□V	0.85	○			
10	± 20 % (M)							ECY39RJ106MV	0.85*	○

□: Capacitance tolerance code : "□" for "K" or "M"

Dimensional tolerance of L, W, T: L, W: $\pm$ 0.15 mm / T: $\pm$ 0.1 mm for no mark, L, W: $\pm$ 0.2 mm / T: $\pm$ 0.1 mm for "*" mark

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel

Avoid flow soldering.

■ Impedance/ESL-Frequency [Ex.]

Size 0612, Temperature Characteristics X5R, 1 μ F

