

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1200650533](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

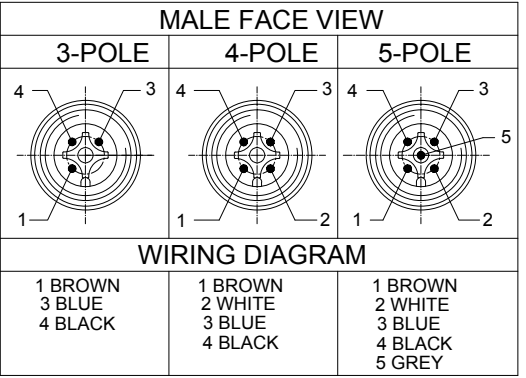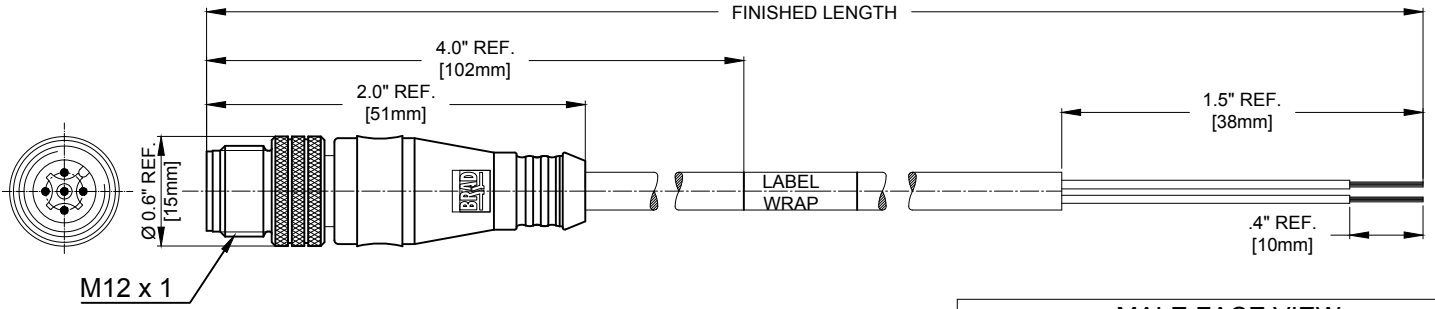

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY	RoHS COMPLIANT

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
INSERT	NYLON	BLACK
OVERMOLD	PUR	YELLOW
CABLE- 22/AWG CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

803006A09M020

no poles 3-5 pole
cable type #22/3-5 PVC YELLOW
cable length 020----2 Meters 100----10 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200650200	803006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650414	804006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650523	805006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650533	805006A09M100	32.81" +12.5" -0 [10.0M +318 -0]

PRINTED FOR PART NUMBER MATRIX
EC NO: IFC2014-0588 1/28/15
DRAWN: GUSTAFS
CHECKED: WOLLEGE
APPROVED: MAN 2010/01/25
DESCRIPTION: MICRO-CHANGE ASSEMBLY

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		IN/MM	INCH	NTS	INCH	
4 PLACES ± .010 3 PLACES ± .005 2 PLACES ± .013 1 PLACE ± .025 ANGULAR ± .5°	4 PLACES ± .25 3 PLACES ± .13 2 PLACES ± .25 1 PLACE ± .50 ANGULAR ± .5°	mm	INCH	GGUSTAFS	DATE 2013/11/26	MICRO-CHANGE ASSEMBLY 3-5 POLE MA STR 22/AWG YELLOW PVC CABLE MOLEX INCORPORATED
		DATE 2010/01/21	DATE 2010/01/25	DATE 2010/01/25	DATE 2010/01/25	
		DATE 2010/01/25	DATE 2010/01/25	DATE 2010/01/25	DATE 2010/01/25	
		DATE 2010/01/25	DATE 2010/01/25	DATE 2010/01/25	DATE 2010/01/25	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-120065-028		SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						