

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)
[1201140048](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

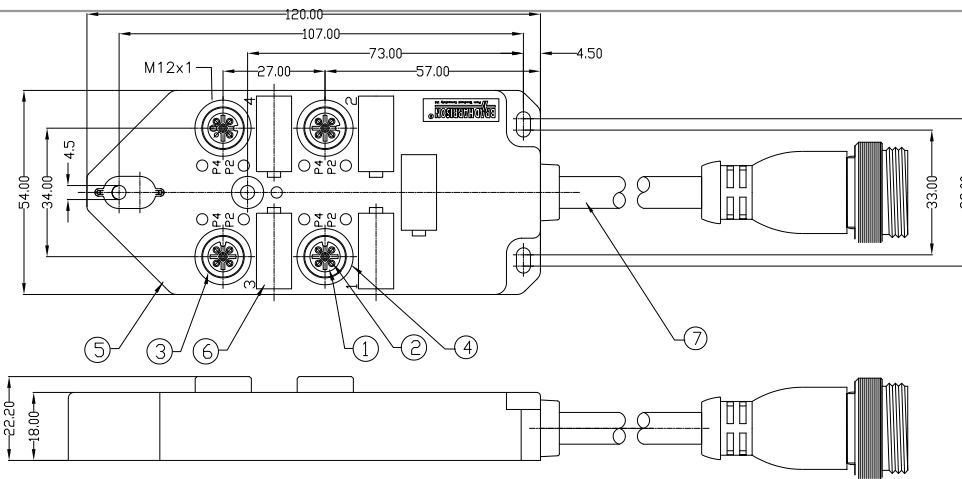


NOTE
FACE VIEW
ON CONNECTOR



MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201140047	BTY4120-FBP-01	1.0M +165.1 -0[3.28' +6.50' -0]	PUR
1201140048	BTY4120-FBP-05	5.0M +165.1 -0[16.40' +6.50' -0]	PUR
1201140049	BTY4120-FBP-10	10.0M +317.5 -0 [32.81' +12.50' -0]	PUR

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	D-RING	NITRILE	RED
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	CABLE 3x0.75/16x0.34	PUR	BLACK

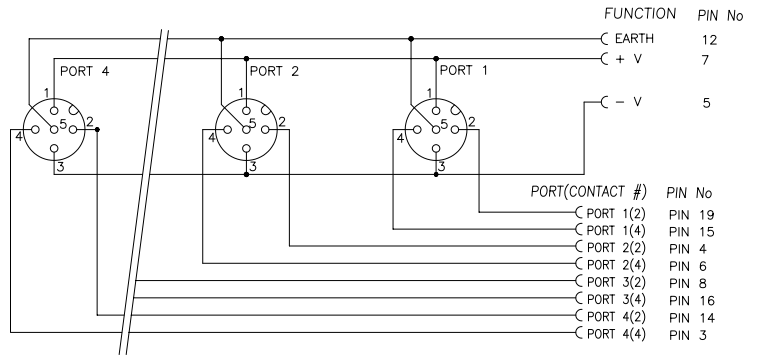

DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	MM ONLY			
EC NO. WEI1201140048 DRAWN: LSTEMMLE 2010/03/12 CHKD: NSTAUDIG 2010/03/15 APPR: NSTAUDIG 2010/03/15	▽ = 0 ▽ = 0 ▽ = 0	4 PLACES ±---	±---	DATE	2:1	METRIC	MICRO-CHANGE MPIS 4 PORT TWIN PORT 5P 19-MM MOLDED CON.
		3 PLACES ±---	±---				
1	REV	2 PLACES ±---	±.01	CHECKED BY: FP	DATE	DATE	MOLEX INCORPORATED
		1 PLACE ±0.3	±---	APPROVED BY: NSTAUDIG			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
				A3	SD-120114-027	1 OF 1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION