

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[International Rectifier \(Infineon Technologies Americas Corp.\)](#)
[IPS5551T](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

International Rectifier

Data Sheet No. PD60168-D

IPS5551T

FULLY PROTECTED HIGH SIDE POWER MOSFET SWITCH


Features

- Over temperature shutdown
- Over current shutdown
- Active clamp
- Input referenced to + V_{CC}
- E.S.D protection
- Input referenced to V_{CC}

Description

The IPS5551T is a fully protected three terminal high side switch with built-in short-circuit, over-temperature, ESD protection, inductive load capability. The input signal is referenced to V_{CC}. When the input voltage V_{CC} - V_{IN} is higher than the specified threshold, the output power MOSFET is turned on. When the V_{CC} - V_{IN} is lower than the specified V_{IL} threshold, the output MOSFET is turned off. Input noise immunity is improved by an hysteresis. When the input is left floating, an internal current source pulls it up to V_{CC}. The over-current protection latches off the high side switch if the output current exceeds the specified I_{SD}. The over-temperature protection latches off the switch if the junction temperature exceeds the specified value T_{SD}. The device is reset by opening the input pin high.

Typical Connection

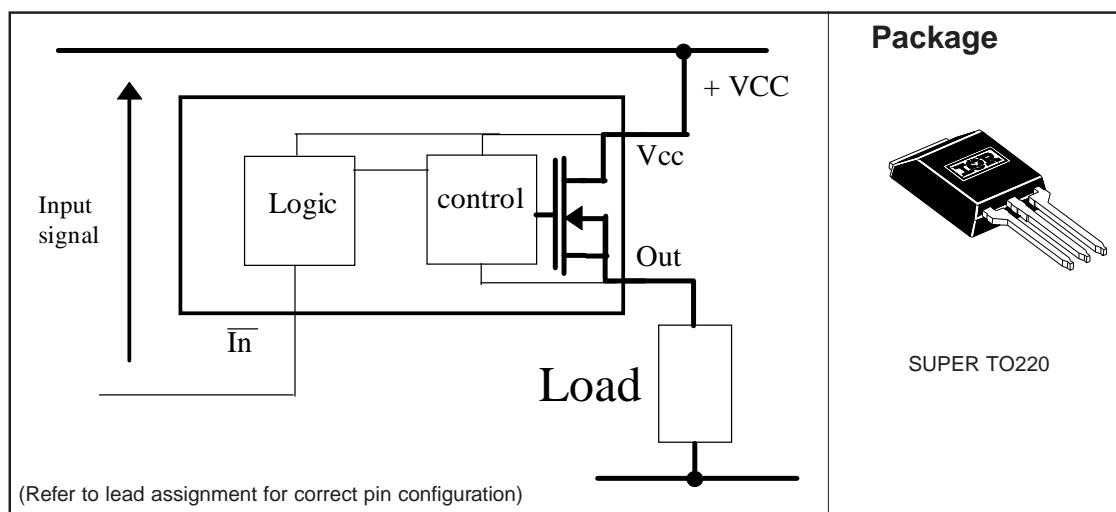

IPS5551T

International
 Rectifier

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to V_{CC} lead. (T_j = 25°C unless otherwise specified). PCB mounting uses the standard footprint with 70µm copper thickness

Symbol	Parameter	Min.	Max.	Units	Test Conditions	
V _{CC} -V _{in} max	Maximum input voltage	-0.3	30	V		
V _{CC} -V _{in1} max	Max. transient Input voltage (less than 1s)	-0.3	40			
I _{in} max	Maximum input current	-1	20	mA		
V _{CC} -V _{out} max	Maximum output voltage	-0.3	40	V		
I _{sd} cont.	Diode max. continuous current (1) (r _{th} = 62°C/W)	—	2.8	A		
I _{sd1} cont.	Diode max. continuous current (1) (r _{th} = 5°C/W)	—	35			
I _{sd} pulsed	Diode max. pulsed current (1)	—	100			
P _d	Power dissipation (r _{th} = 62°C/W)	—	2	W		
ESD1	Electrostatic discharge voltage (Human Body)	—	tbd	kV	C = 100 pF, R = 1500Ω	
ESD2	Electrostatic discharge voltage (Machine Model)	—	tbd			C = 200 pF, R = 0Ω, L=10µH
T stor.	Max. storage temperature	-55	150	°C		
T _j max.	Max. junction temperature	-40	150			
T _{lead}	Lead temperature (soldering 10 seconds)	—	300			

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units	Test Conditions	
R _{th} 1	Thermal resistance free air	60	—	°C/W		
R _{th} 2	Thermal resistance with standard footprint	60	—			
R _{th} 3	Thermal resistance with 1" footprint	35	—			
R _{th} 4	Thermal resistance junction to case	0.7	—			

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

Symbol	Parameter	Min.	Max.	Units
V _{CC} - V _{in}	Continuous input voltage	6	18	V
V _{CC}	Supply to power ground voltage	6	18	
I _{out}	Continuous output current (r _{th} c/amb. < 5°C/W, T _j = 125°C)	—	35	A
I _{out} T _{amb} =85°C	Continuous output current (T _{Ambient} = 85°C, T _j = 125°C, free air)	—	8	

(1) Limited by junction temperature. Pulsed current is also limited by wiring

International
IR Rectifier

IPS5551T

Static Electrical Characteristics

($T_j = 25^\circ\text{C}$ and $V_{cc} = 14\text{V}$ unless otherwise specified.)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
R _{ds(on)} 1	ON state resistance	—	4.6	6.0	mΩ	I _{out} =35A, V _{cc} -V _{in} =12V see Fig. 6
R _{ds(on)} 2	ON state resistance	—	4.6	—		I _{out} =17A, V _{cc} -V _{in} = 6V
R _{ds(on)} 3	ON state resistance $T_j = 150^\circ\text{C}$	—	7.4	—		I _{out} = 35A, $T_j = 150^\circ\text{C}$
V _{clamp} 1	V _{cc} to V _{out} active clamp voltage	35	40	—	V	I _{out} = 10mA
V _{clamp} 2	V _{cc} to V _{out} active clamp voltage	—	42	48		I _{out} = 35A - t < 100us
V _{sd}	Body diode forward voltage	—	0.85	1		I _d = 35A, V _{cc} -V _{in} = 0V
V _{cc} (op)	Operating voltage range	5.5	—	28		
I _q	Quiescent current	—	13	50	μA	V _{cc} -V _{in} =0V, V _{cc} -V _{out} = 12V
I _{in}	Input current	3	6.5	12	mA	V _{cc} - V _{in} = 14V
I _{in, on}	Input current when ON	—	1.3	—		V _{cc} - V _{in} = V _{ih}
V _{ih}	High level input threshold voltage	—	4.75	5.5		V _{cc} - Vin (note 2)
V _{il}	Low level input threshold voltage	3	4.05	—	V	V _{cc} - Vin (note 2)
V _{hys}	Input hysteresis	0.3	0.6	1.5		

Switching Electrical Characteristics

$V_{cc} = 14\text{V}$, Resistive Load = 0.4Ω , $T_j = 25^\circ\text{C}$, (unless otherwise specified).

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions	
T _{don}	Turn-on delay time to V_{cc} -V _{out} = 0.9 V _{cc}	—	10	30	μs	See figure 2	
T _{r 1}	Rise time to V_{cc} -V _{out} = 5 V	—	16	50			
T _{r 2}	Rise time from the end of Tr1 to V_{cc} -V _{out} = 0.1 V _{cc}	—	200	400			
dV/dt (on)	Turn on dV/dt	—	1.2	5	V/μs	See figure 3	
E _{on}	Turn ON energy	—	25	—	mJ		
T _{doff}	Turn-off delay time V_{cc} -V _{out} = 0.1 V _{cc}	—	130	300	μs		
T _f	Fall time to V_{cc} -V _{out} = 0.9 V _{cc}	—	25	50			
dV/dt (off)	Turn OFF dV/dt	—	2	6	V/μs		
E _{off}	Turn OFF energy	—	6	—	mJ		

Protection Characteristics

$T_j = 25^\circ\text{C}$, and $V_{cc} = 14\text{V}$ (unless otherwise specified).


Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
T _{sd}	Over temperature shutdown threshold	—	165	—	°C	See fig. 4
I _{sd}	Over current shutdown threshold	60	100	150	A	
T _{reset}	Minimum time for protection reset	—	50	—	μs	

- (2) Input threshold are measured directly between the input pin and the tab. Any parasitic resistance in common between the load current path and the input signal path can significantly affect the thresholds.


IPS5551T

International
IR Rectifier

Functional Block Diagram

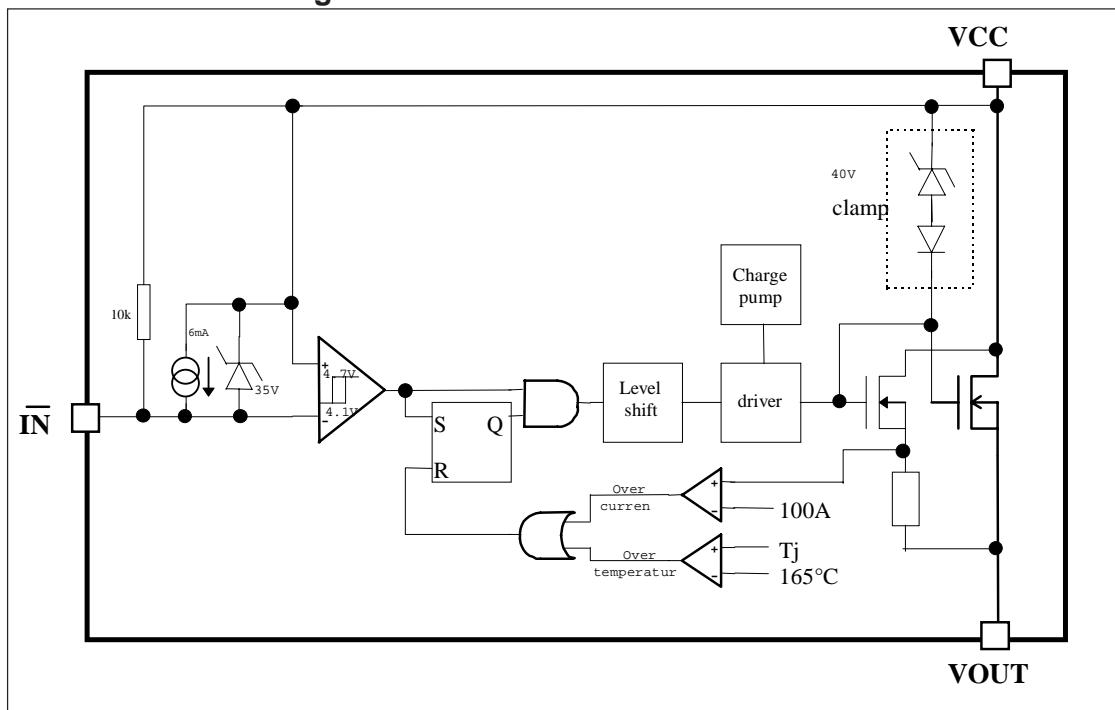

Lead Assignments

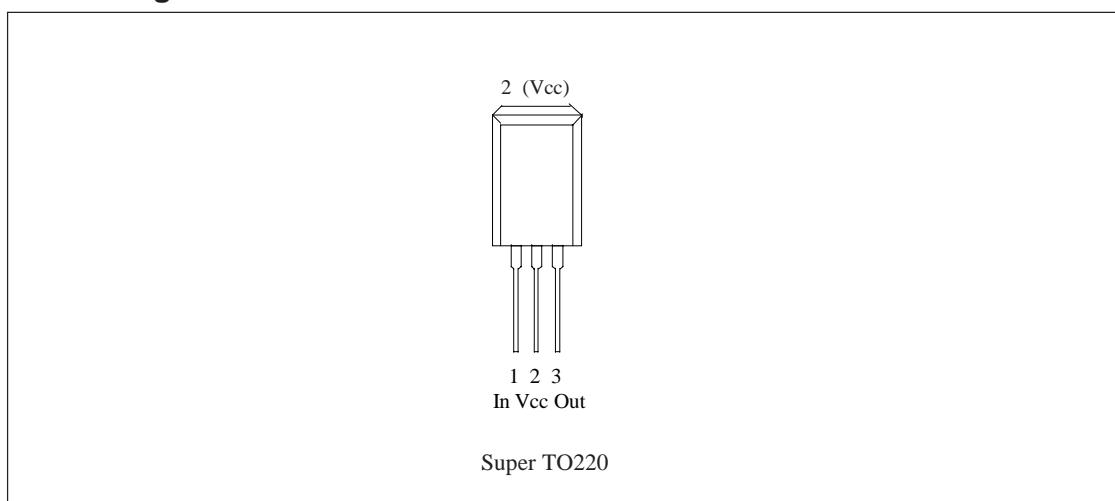

International
IR Rectifier

IPS5551T

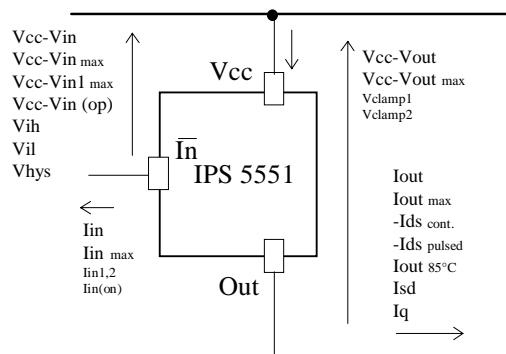


Figure 1 - Voltages and currents definition

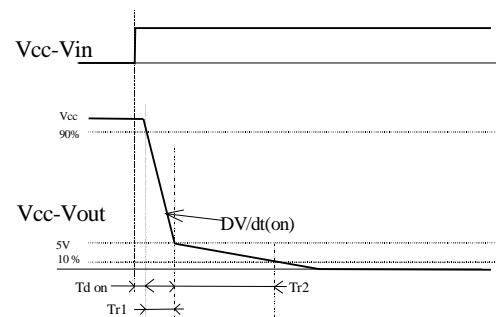


Figure 2 - Switching time definitions (turn-on)

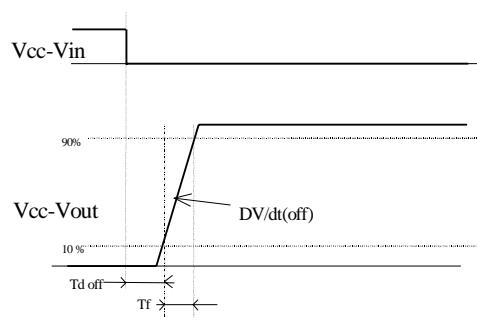


Figure 3 - Switching time definitions (turn-off)

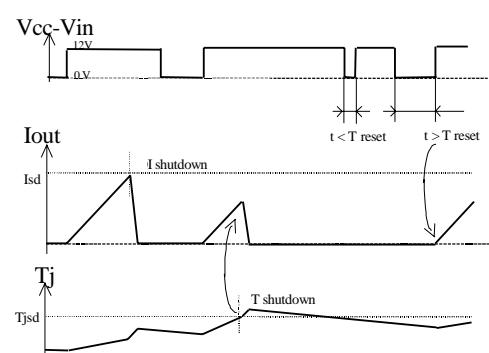


Figure 4 - Protection timing diagram

IPS5551T

International
IR Rectifier

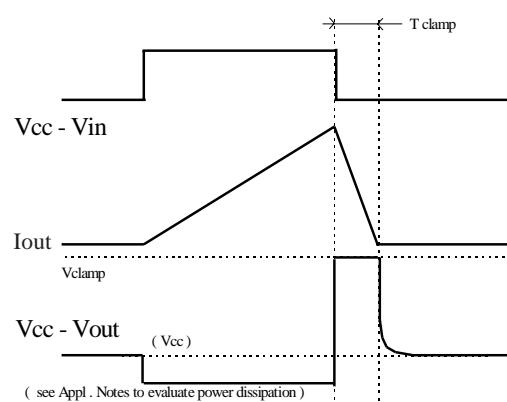


Figure 5 - Active clamp waveforms




Figure 6 - $R_{ds(on)}$ measurement schematic

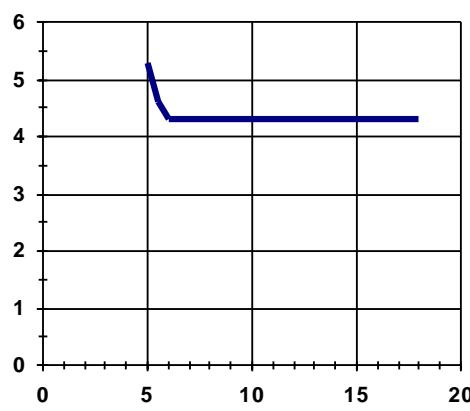


Figure 7 - $R_{ds(on)}$ ($m\Omega$) Vs $V_{cc} - V_{in}$ (V)

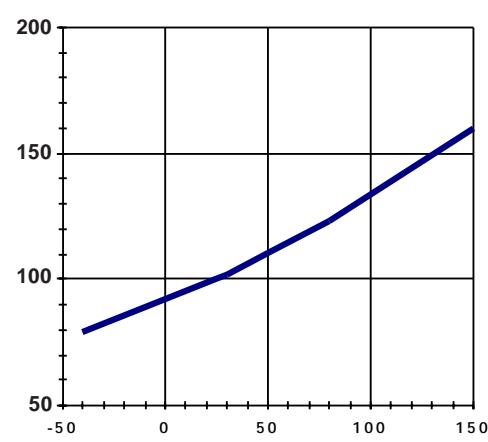


Figure 8 - Normalized $R_{ds(on)}$ (%) Vs T_j (°C)

International
IR Rectifier

IPS5551T

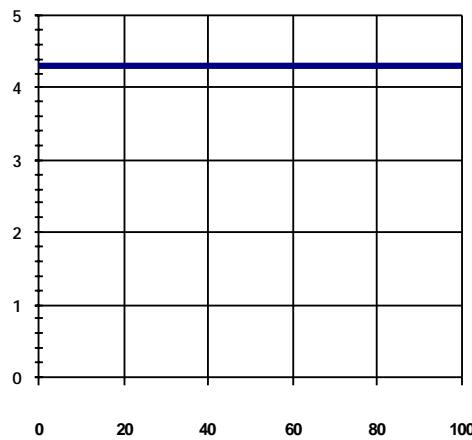


Figure 9 - $R_{ds(on)}$ (mΩ) Vs I_{out} (A)

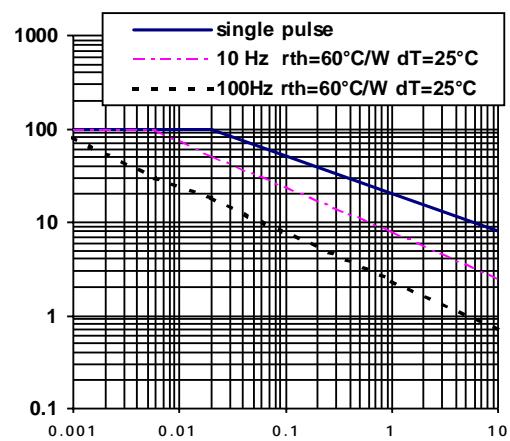


Figure 10 - I_{clamp} (A) Vs Inductive Load (μ H)

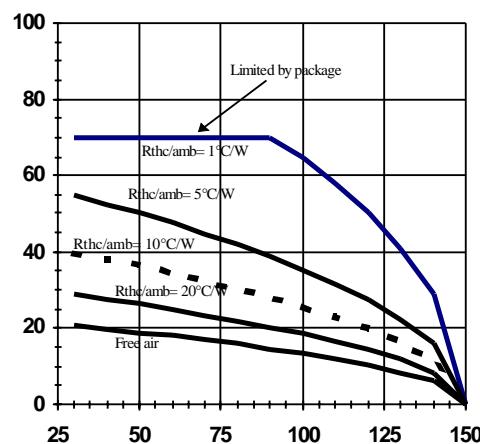


Figure 11 - Max. load current (A)
Vs Temperature (°C)

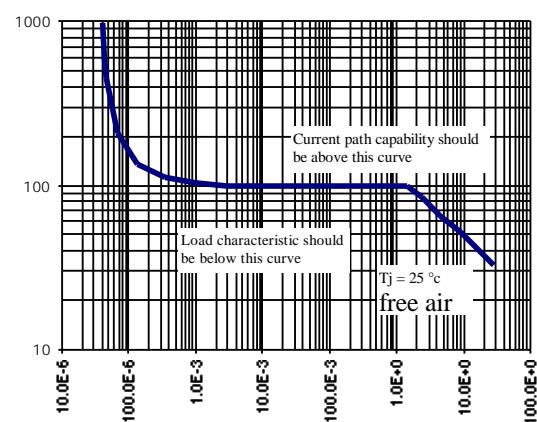


Figure 12 - I_{out} (A) Vs Protection resp. Time (ms)

IPS5551T

International
IR Rectifier

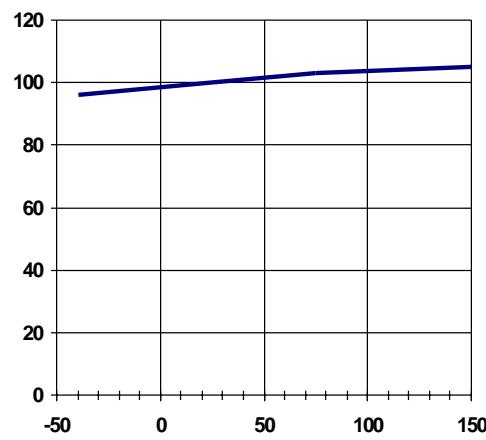


Figure 13 - I_{SD} (A) Vs T_j (°C)

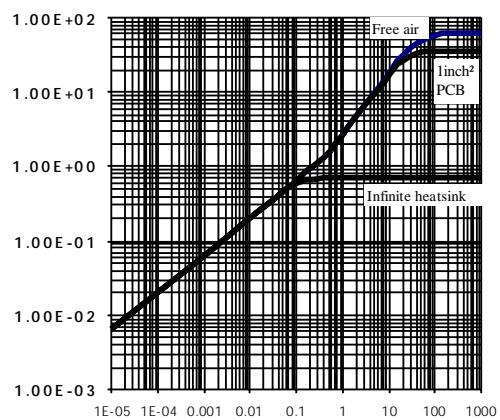


Figure 14 - Transient thermal impedance (°C/W)
Vs Time (s)

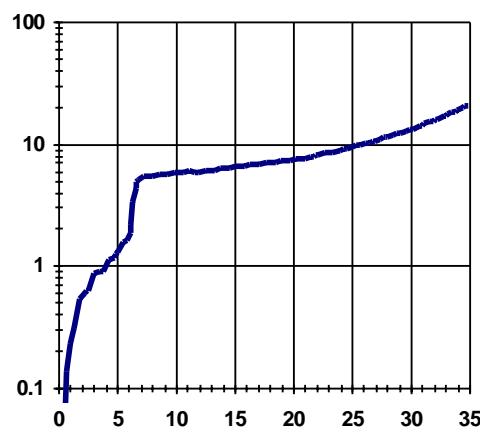


Figure 15 - I_{CC} (mA) Vs V_{cc}-V_{in} (V)

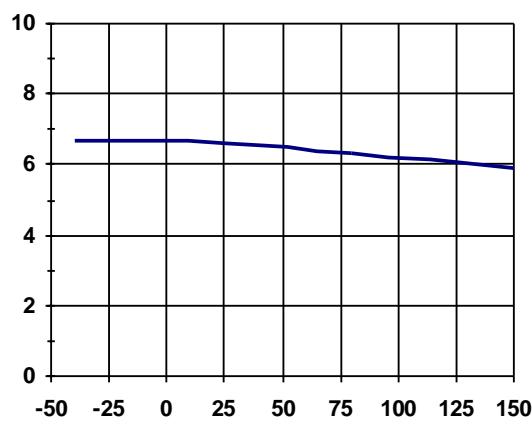


Figure 16 - I_{IN} (mA) Vs T_j (°C)

International
IR Rectifier

IPS5551T

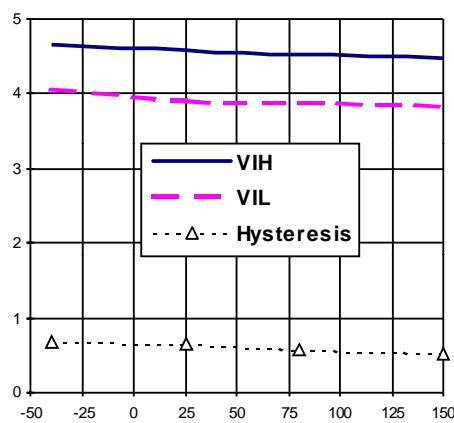


Figure 17 - V_{IH} , V_{IL} threshold (V) Vs T_j (°C)

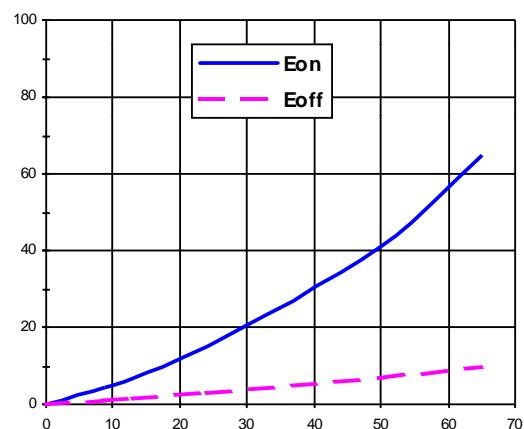


Figure 18 - E_{on} , E_{off} (mJ) Vs I_{out} (A)

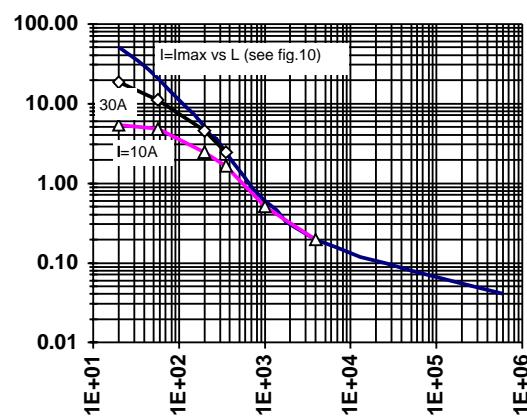


Figure 19 - E_{on} (mJ) Vs Inductive load (μ H)
($V_{cc} = 14V$, $R_{load} = 0.5\Omega$)

IPS5551T

International
IR Rectifier


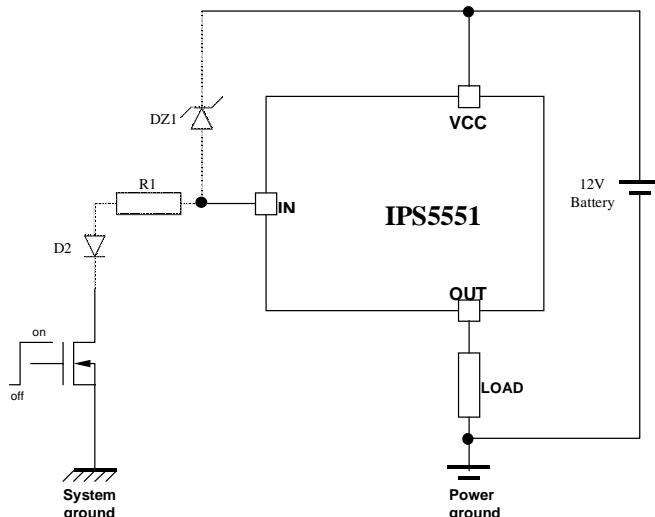


Figure 20 - Automotive typical connection

Case outline Super TO220

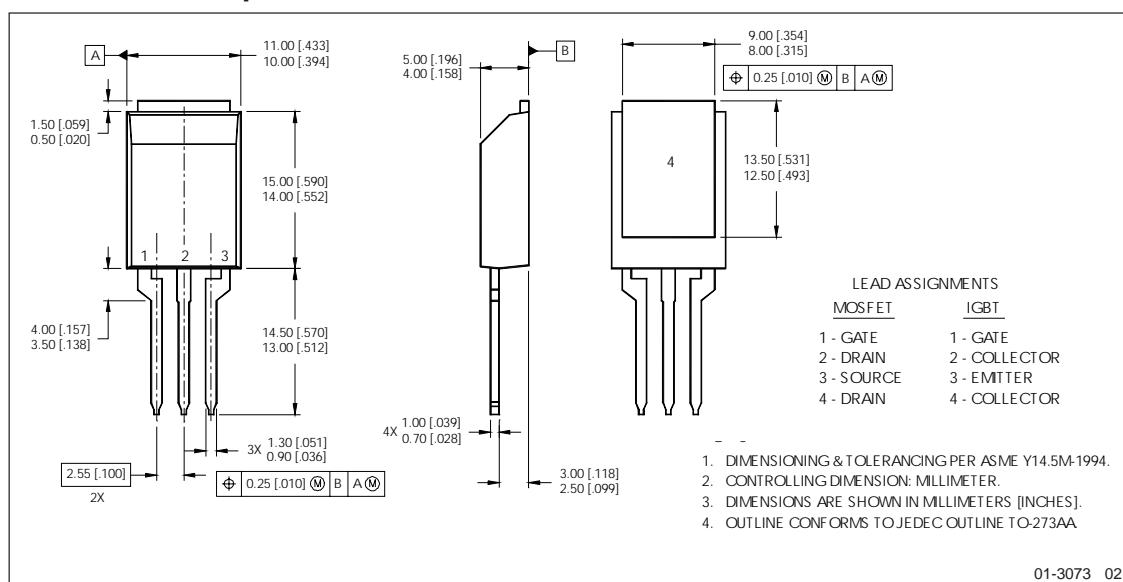

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
Data and specifications subject to change without notice. 6/21/2002