

## Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)  
[800-12-32D-RE-0006F](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

插頭部件 (Plug Component)			頭部製皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)			尾部製皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)			
顏色(Color)	零件描述(Component)	數量(Q'ty)	內制(Strip)	外制(Roj)	顏色(Color)	SJT 12AWG/3C 105°C 紅色(Red)			外制(Roj)	內制(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)	
35P紅色 90A±2A Red	FM-320 (20A 250V-) (IEC 320 C20)	1	5 <sup>+1</sup> <sub>-0</sub>	20±1	黑/Black(L)	線長: 1790.7 <sup>+50.8</sup> <sub>-12.7</sub> (Length)			20±1	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	35P紅色 90A±2A Red	FM-319 (20A 250V-) (IEC 320 C19)	1	
鍍鎳 2.0A5.0電腦電源線端子 (Computer power cord terminal)		1	5 <sup>+1</sup> <sub>-0</sub>	20±1	白/White(N)				20±1	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	鍍鎳 (Nickel-Plated)	鍍鎳 (Receptacle Terminals)	每插端子	3
Nickel-Plated 鍍鎳 2.0A5.0電腦電源線端子 (Computer power cord terminals)	FM-320兩件式內模 (FM-320 Inner Body)	2	5 <sup>+1</sup> <sub>-0</sub>	20±1	綠/Green(E)				20±1	5 <sup>+1</sup> <sub>-0</sub>	綠/Green(E)	黑色(Black)	黑色(Black)	FM-319兩件式內模 (FM-319 Inner Body)	1

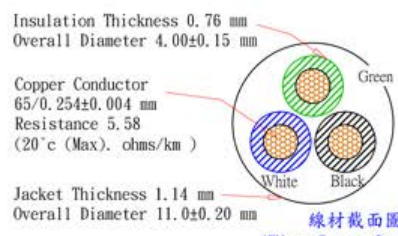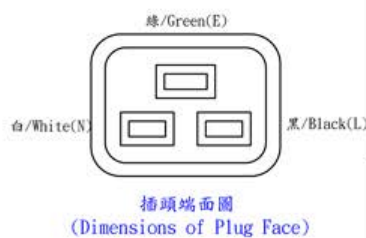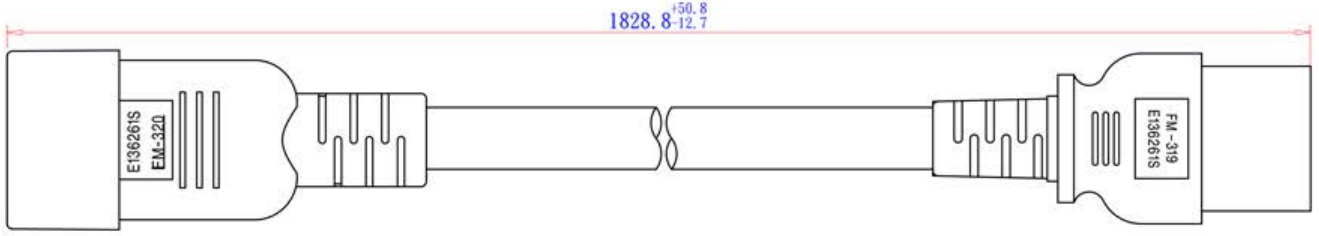

包裝方式(Packing)	
扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤 (Label)	UL Detachable Label
正側串頭 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 (Wire Printed)	1. 高壓測試: 1500V/1Sec <1mA (Hi-Pot Test: 1500v/1Sec <1mA)
使用充實線材四印字 (Un-Filler, Gravure)	
紙箱零頭標記 (Shipping Mark)	

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	

SIGNATURE	NAME	DATE		
APPROVED				
M.F.G. CHECKED			2011/11/26	新版發行 楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION SYMBOL
DRAWN	楊承正	2011/11/26	PART No.	800-12-32D-RE-0006F
CUSTOMER		<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology		
		DWG No.		

V E322763 (UL) SJT 12AWG(3.31mm<sup>2</sup>)x3C VW-1 105°C 300V  
 JFT c(UL) SJT 12AWG(3.31mm<sup>2</sup>)x3C FT2 105°C 300V -LF-  
 (UL) SJT 12AWG(3.31mm<sup>2</sup>)x3C VW-1 105°C 300V E77975 WONDERFUL-D  
 CSA SJT 12AWG(3.31mm<sup>2</sup>)x3C FT2 105°C 300V LL43774 -F- -LF-