

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Omron](#)
[CAA1M](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


D2MC

Low-Torque Basic Switch

Highly Reliable Rotary-action Switch for Low Torque Operation (0.5 mN·m)

- 0.5A rated model employs crossbar gold-alloy contacts for excellent contact reliability in the micro load range.
- Long durability (10,000,000 mechanical operations min.) through use of a movable coil spring.

RoHS Compliant

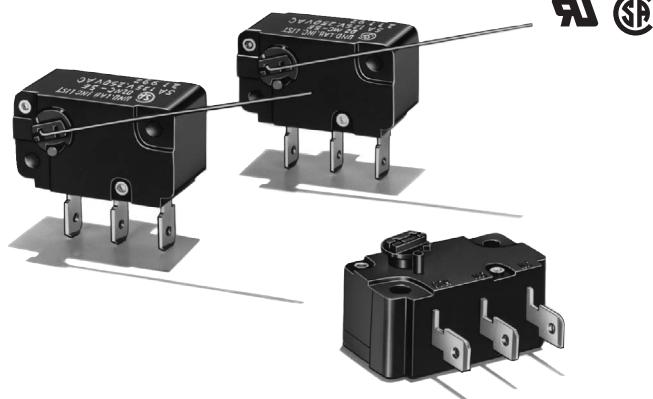

D
2
M
C

Model Number Legend

D2MC -	1	2	3
1. Ratings			
5: 250 VAC 5A			
01: 30 VDC 0.5A			
2. Maximum Operating Torque (OTq)			
E: 0.5 m N·m {5.1 gf·cm}			
F: 0.75 m N·m {7.6 gf·cm}			
H: 1.00 m N·m {10.2 gf·cm}			
3. Direction of Actuator			
None : Clockwise			
L : Counterclockwise			


List of Models

Direction of actuation	Ratings	5A	0.5A
Clockwise (CW)	Operating Torque (OTq)		
	0.5 m N·m {5.1 gf·cm}	D2MC-5E	D2MC-01E
	0.75 m N·m {7.6 gf·cm}	D2MC-5F	D2MC-01F
Counter-clockwise (CCW)	1.00 m N·m {10.2 gf·cm}	D2MC-5H	D2MC-01H
	0.5 m N·m {5.1 gf·cm}	D2MC-5EL	D2MC-01EL
	0.75 m N·m {7.6 gf·cm}	D2MC-5FL	D2MC-01FL
	1.00 m N·m {10.2 gf·cm}	D2MC-5HL	D2MC-01HL

Note. All the models listed here are supplied without actuator lever. If an actuator lever is required, please order separately by indicating the model number of the actuator lever (CAA1M).

Contact Form

- SPDT



Contact Specifications

Item	Model	D2MC-5	D2MC-01
Contact	Specification	Rivet	Crossbar
	Material	Silver alloy	Gold alloy
	Gap (standard value)	0.5 mm	
Inrush current	NC	15A max.	0.5A max.
	NO	7A max.	0.5A max.
Min. applicable load (see note)	5 VDC 160mA	5 VDC 1mA	

Ratings

Model	Rated voltage	Resistive load
D2MC-5 models	125 VAC	5A
	250 VAC	5A
D2MC-01 models	125 VAC	0.5A
	30 VDC	0.5A

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

Characteristics

Item	Model	D2MC-5 models	D2MC-01 models
Permissible operating speed	1° to 360°/s		
Permissible operating frequency	Mechanical 240 operations/min		
	Electrical 60 operations/min (for 0.5 m N·m)		
Insulation resistance	100 MΩ min. (at 500 VDC with insulation tester)		
Contact resistance (initial value)	20 mΩ max. 100 mΩ max.		
Dielectric strength	Between terminals of the same polarity		600 VAC 50/60 Hz 1min
	Between current-carrying metal parts and ground		1,500 VAC 50/60 Hz 1min
	Between each terminal and non-current-carrying metal parts		1,500 VAC 50/60 Hz 1min
Vibration resistance * 1	Malfunction		10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Durability		1,000 m/s² {approx. 100G} max.
	Malfunction * 1	Models with OTq of 0.5 m N·m:	100 m/s² {10 G} max.
		Models with OTq of 0.75 m N·m:	100 m/s² {10 G} max.
		Models with OTq of 1.00 m N·m:	200 m/s² {20 G} max.
Durability * 2	Mechanical		10,000,000 operations min. (60 operations/min)
	Electrical		100,000 operations min. (30 operations/min)
Degree of protection	IEC IP40		
Ambient operating temperature	-25°C to +80°C (at ambient humidity of 60% max.) (with no icing or condensation)		
Ambient operating humidity	85% max. (for +5°C to +35°C)		
Weight	Approx. 10g		

Note. The data given above are initial values.

*1. Close or open circuit of the contact is 1ms max.

*2. For testing conditions, consult your OMRON sales representative.

D2MC

Low-Torque Basic Switch

Approved Safety Standard

UL (UL1054) / CSA (CSA C22.2 No.55)



Rated voltage	Model	D2MC-01	D2MC-5
125 VAC	0.5A	5A	
250 VAC	-	5A	
30 VDC	0.5A	-	

Dimensions (Unit: mm) / Operating Characteristics

D
2
M
C



The □ in the model number are for the Ratings and OTq code. See the "List of Models" for available combinations of models.

●Clockwise (CW) D2MC-□□

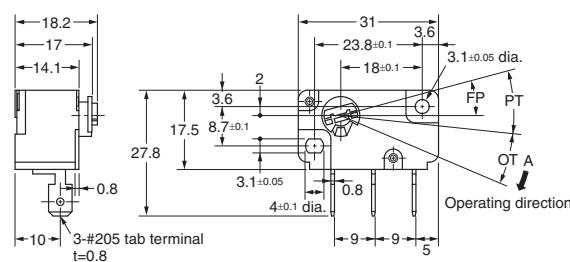

Operating characteristics	Model	D2MC-5E	D2MC-5F	D2MC-5H
Operating Torque OTq Max.	D2MC-01E	0.5 m N·m (5.1 gf·cm)	0.75 m N·m (7.6 gf·cm)	1.00 m N·m (10.2 gf·cm)
Releasing Torque RTq Min.		0.06 m N·m (0.6 gf·cm)	0.09 m N·m (0.9 gf·cm)	0.13 m N·m (1.3 gf·cm)
Pretravel PT Max.		21°	21°	21°
Overtravel OT Min.		17°	17°	17°
Movement Differential MD Min.		3°	3°	3°
Release Travel RT Min.		5°	5°	5°
Total Travel TT Min.			38°	
Free Position FP			15°±3°	

●Counterclockwise (CCW) D2MC-□□L

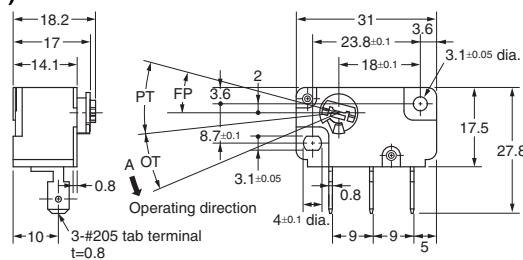

Operating characteristics	Model	D2MC-5EL	D2MC-5FL	D2MC-5HL
Operating Torque OTq Max.	D2MC-01EL	0.5 m N·m (5.1 gf·cm)	0.75 m N·m (7.6 gf·cm)	1.00 m N·m (10.2 gf·cm)
Releasing Torque RTq Min.		0.06 m N·m (0.6 gf·cm)	0.09 m N·m (0.9 gf·cm)	0.13 m N·m (1.3 gf·cm)
Pretravel PT Max.		21°	21°	21°
Overtravel OT Min.		17°	17°	17°
Movement Differential MD Min.		3°	3°	3°
Release Travel RT Min.		5°	5°	5°
Total Travel TT Min.			38°	
Free Position FP			15°±3°	

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions

★Please refer to "Basic Switches Common Precautions" for correct use.

Cautions

- Connecting to the tab terminal #205
Insert the receptacle for #205 straight toward the terminal.
Applying excessive external force horizontally or vertically may cause deformation of terminals and may damage the housings.

Correct Use


●Mounting

Use M3 mounting screw with plane washers or spring washers to securely mount the Switch.
Tighten the screws to a torque of 0.2 to 0.29 N·m {2 to 3 kgf·cm}.

Actuator Lever (Sold Separately)

●CAA1M

In addition to the standard wire lever model shown here, various other levers (wire levers) are available upon request. Please purchase the actuator lever you need separately.




2. Push the lever down in the direction of the groove in the rotary disc.



●Mounting Actuator Lever

Lever can be mounted easily with one touch as shown below.


1. Insert the end of the actuator lever into the hole in the rotary disc.



●Designing Own Actuator

Read the following instructions if you decide to design your own actuator lever.

- Materials: stainless steel, piano wire, hard aluminum wire, etc.
- Shape: There are no restrictions on the tip shape or length of the actuator lever. However, if the lever is too long, improper switch resetting or contact chattering may occur. Therefore, the shape of lever as shown below is suitable. The appropriate value of dimension (ℓ) from the fulcrum is 50 mm.

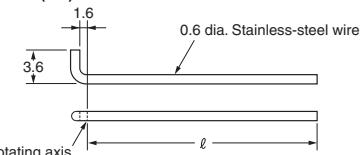

D2MC**Low-Torque Basic Switch**D
2
M
C

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.