

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[C-TON Industries](#)
[DK710](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

LCD Digital Panel Meters

Low Cost 4½ Digit LCD Display

FEATURES

- ▶ Low-cost, high-performance replacement for many OEM DPMs
- ▶ Mounting choices:
Window mount for custom OEM
Surface mount with minimum space behind the panel
Snap-in bezel mount eliminates mounting hardware
- ▶ Low power: choice of 1.5mA (9V) or 2.6mA (+5V)
- ▶ Space-saving design: only 1" (25 mm) deep
- ▶ Occupies less than 2.5 X 1.1 inches of front panel space
- ▶ 4½ digits with high-contrast LCD

SPECIFICATIONS

DISPLAY

Digits: 4 ½ digits (±19999 counts)
Type: 0.5" (13mm) 7 segment LCD
Polarity: automatic, "-" displayed
Annunciators: "LoBat" when power <7.2 VDC
Decimal Points: 4 position, user-selectable
Overrange: four lower order digits blank for inputs >19999 & < -19999
Hold: standard

INPUTS

Ranges: ±200.0 mV, ±2.000 V, ±20.00 VDC
Configuration: single ended for 9 V powered,
differential for 5 V powered
Protection: ±10 VDC on 200 mV ;
±100 VDC on @ 2V ;
±350 VDC on 20 V range
Impedance: >100 MΩ on ± 200 mV ;
(>1 MΩ on 2 V & 20 V range)
Bias Current: 10 pA typical

PERFORMANCE

Accuracy: ±(0.06% fs + 1 count) maximum
Conversion Rate: 2 per second
Normal Mode Rejection: >30 dB @ 60 Hz
Common Mode Range: ±1 VDC (5 V powered)
Common Mode Rej.: >86 dB
Zero Adjustment: automatic
Warmup: 10 minutes typical
Temperature Coeff.: ±50 ppm per °C typical
±100 ppm max for 200 mV range
±100 ppm per °C typical
±200 ppm max for 2V and 20V ranges

ENVIRONMENT

Operating Range: 0 to 50 °C
Storage Range: -10 to 70 °C

POWER SUPPLY

5V powered: +5 VDC (4.65 - 5.35) at 2.6 mA
9V powered: +7.2 to +12 V at 1.5 mA

MOUNTING

DK700: surface or window mount
DK710: snap-in bezel mount

CONNECTION

13 pins, 0.025" square on
0.1" centers

ORDERING INFO

DK700 SERIES - WINDOW / SURFACE MOUNT

PART NUMBER	METER INPUT	METER POWER
DK702	200mV	+5VDC
DK703	2V	+5VDC
DK704	200mV	9V
DK705	2V	9V

DK710 SERIES - SNAP-IN BEZEL MOUNT

PART NUMBER	METER INPUT	METER POWER
DK710	200mV	+5VDC
DK711	2V	+5VDC
DK712	20V	+5VDC

ACCESSORIES

J4C13	13 Pin Connector / Wire Assembly
PW2-5	Regulated 120V AC to 5V DC Power Supply
PW2-12	Regulated 120V AC to 12V DC Power Supply
CVC	Calibrator



LCD Digital Panel Meters


Low Cost 4½ Digit LCD Display

DK700-710




Specifications Installation and Operating Instructions


WINDOW/SURFACE MOUNT DIMENSIONS

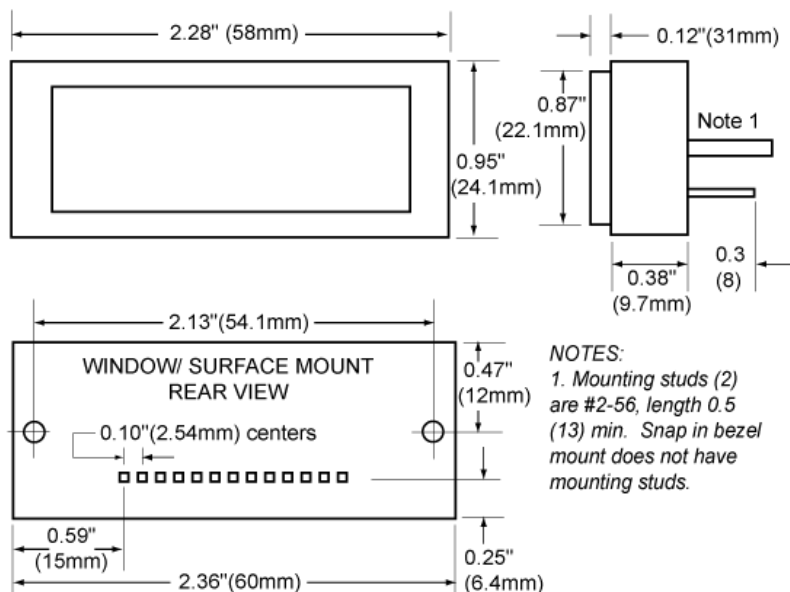

PANEL CUTOUTS

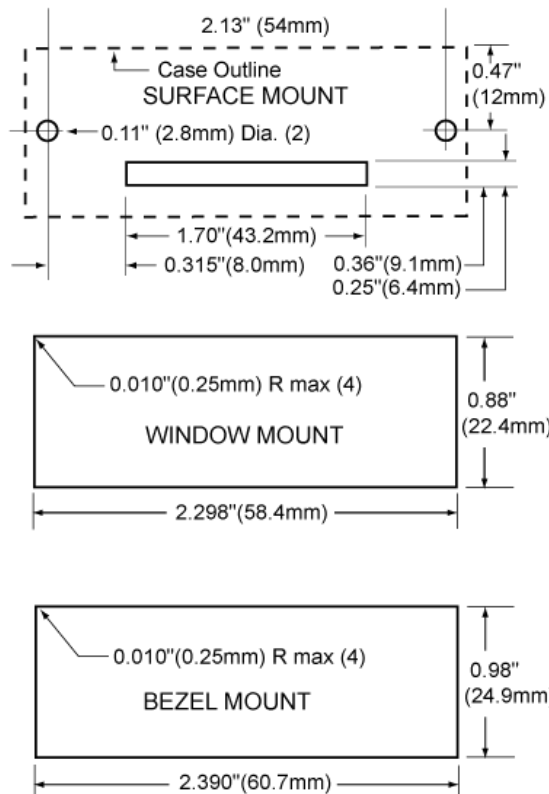

SNAP-IN BEZEL MOUNT DIMENSIONS

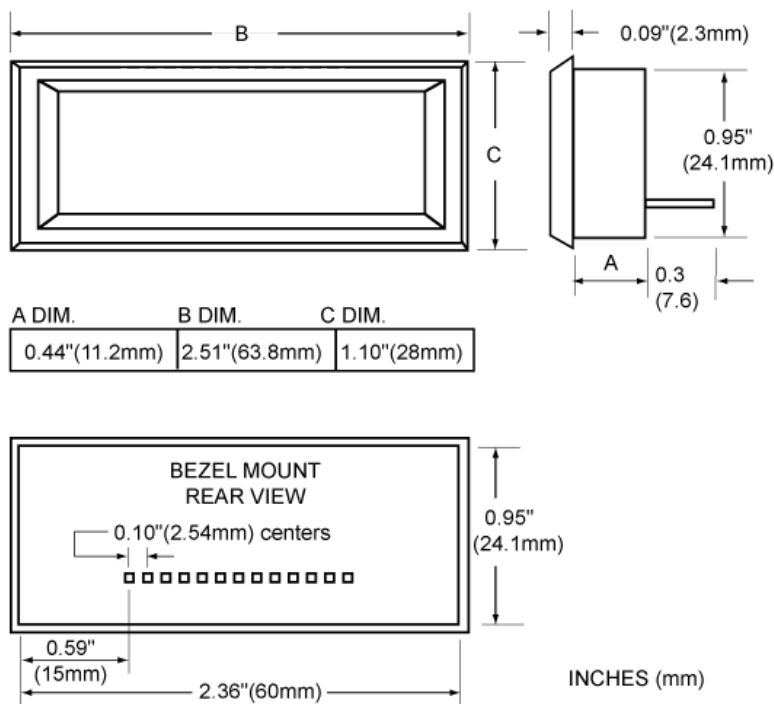

WIRING CONNECTIONS

PIN # PIN NAME DESCRIPTION

1	V+	POSITIVE SUPPLY CONNECTION
2	V-	NEGATIVE SUPPLY CONNECTION
3	INHI	INPUT HIGH TERMINAL
4	INLO	INPUT LOW TERMINAL
5	D1	DECIMAL POINT = 000.0
6	D2	DECIMAL POINT = 00.00
7	D3	DECIMAL POINT = 0.000
8	D4	DECIMAL POINT = .0000
9	DP	DP COMMON
10	RNG	10:1 RANGE
11	HLD	HOLD FEATURE
12	NC	NO CONNECTION REQUIRED
13	NC	NO CONNECTION REQUIRED

CONNECT TO DECIMAL POINTS TO ACTIVATE

CONNECT TO V+ POINTS TO ACTIVATE