

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[100SP1T2B4M7RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET OF


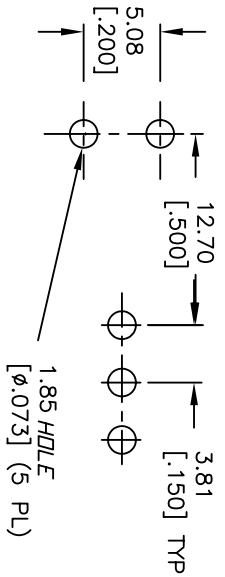


**SPDT CIRCUIT
CONTACT CONFIGURATION**

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
CN	NDNE	CN
2-3	N/A	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20V AC or DC max.
5. FIXED TERM. & MOVING CONTACT:
COPPER Alloy w/GOLD plate over
Nickel plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C
10. 2002/95/EC (ROHS) COMPLIANT

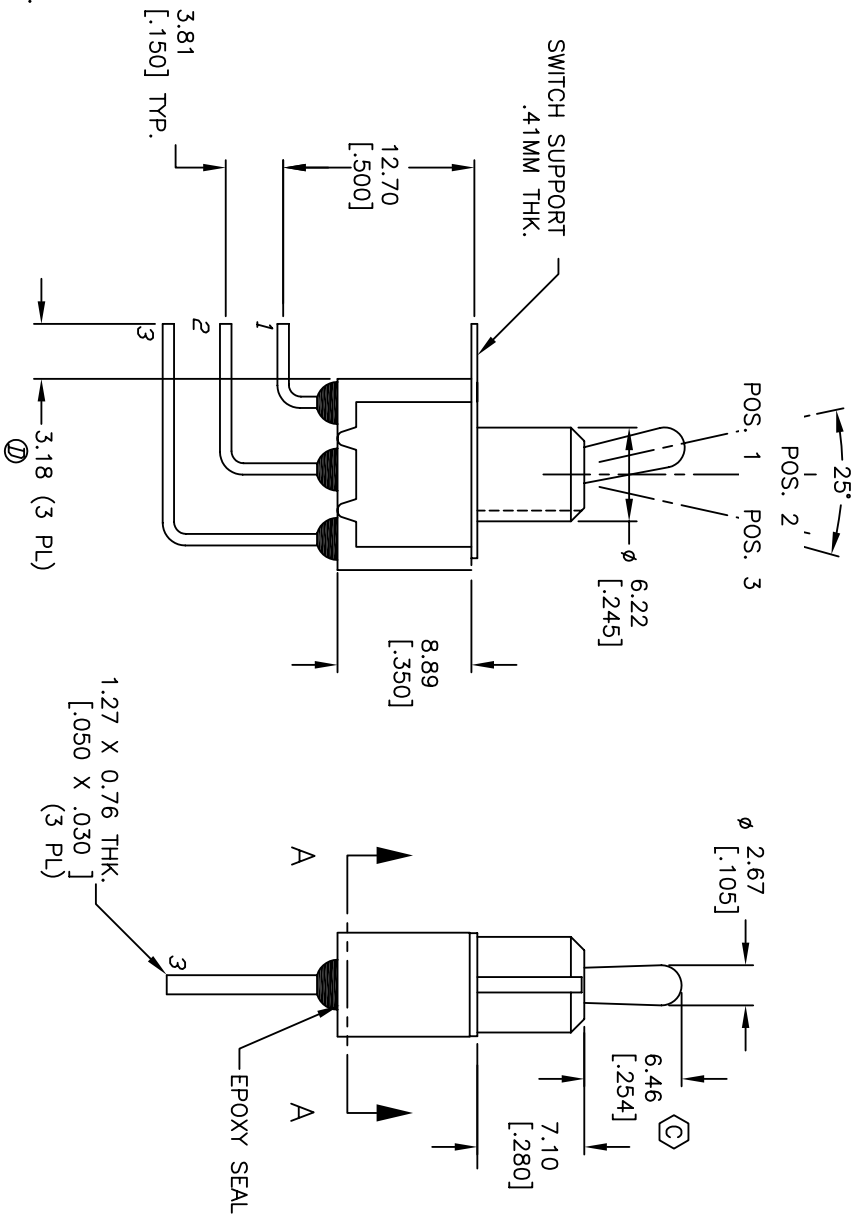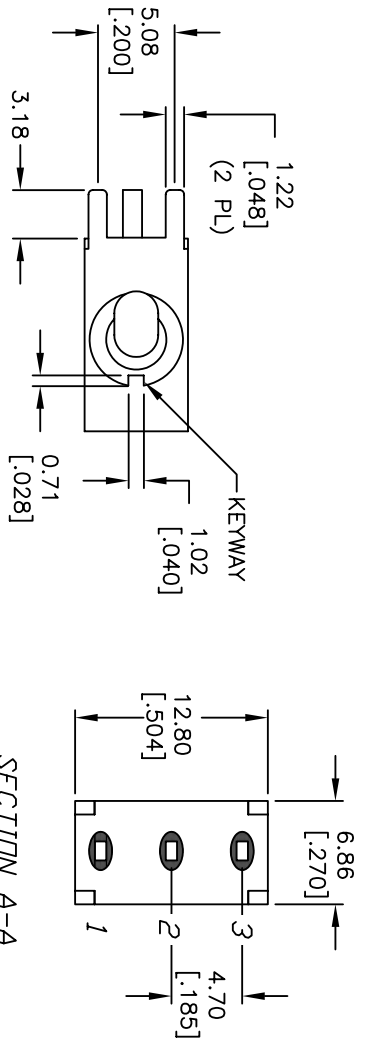

REV.	ECN No.	DESCRIPTION	DATE	CHKD
E	15789	EDIT TOP VIEW, ADD RCHS	2/17/06	PH
D	15200	CHANGES NOTED WITH ⑩	8/24/05	PH
C	14044	ACTUATOR HEIGHT	5/27/04	AR
B	12547	REVISED AND REDRAWN	12/2/02	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE				
100 SP-1 T2 B4 M7 RE (GOLD CONTACTS)				
SCALE	DATE	DR	DWG	REV
2:1	--	--	T110003	E

E-SWITCH®