

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[100SP3T2B4M7RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SPDT CIRCUIT

CONTACT CONFIGURATION

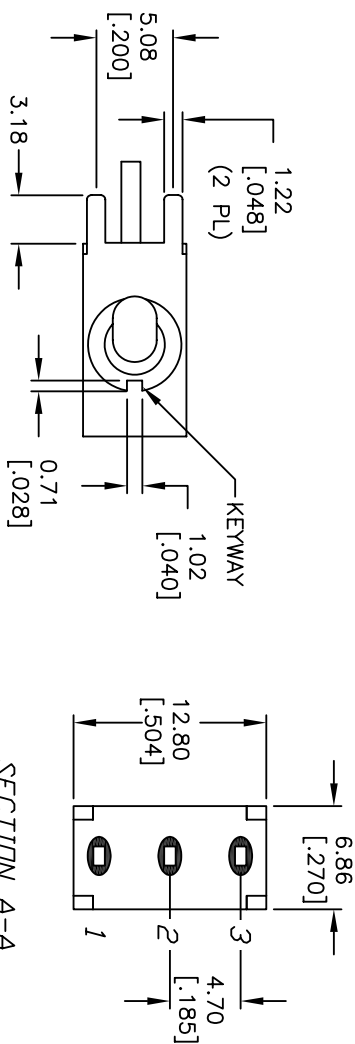
SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
DN	OFF	DN	
2-3	OPEN	2-1	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4VA @20V AC or DC max.
5. FIXED TERM. & MOVING CONTACT:
COPPER Alloy w/ GOLD plate over
Nickel plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$
10. ▲ DENOTES CRITICAL PARAMETER

B	16058	EDIT DIMENSIONS	5/30/06	CT
A	12547	RELEASED	12/2/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE	SCALE	DATE	NO	W/C	REV
100 SP-3 T2 B4 M7 RE (GOLD CONTACTS)					

E-SWITCH®

SECTION A-A

