

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[ATT-0640-03-29M-02](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

NOTES:

1.0 SPECIFICATIONS.

- 1.1 FREQUENCY RANGE: DC to 40.0 GHz
- 1.2 ATTENUATION ACCURACY:

	DC to 26.5 GHz	26.5 to 40.0 GHz
3 & 6dB:	±0.5dB	±0.8dB
10 & 20dB:	±0.6dB	±1.0dB

1.3 MAXIMUM VSWR:

DC to 18.0 GHz	1.30:1
18.0 to 40.0 GHz	1.40:1

1.4 MAXIMUM INPUT POWER:


1 WATTS AVG. AT +25°C DERATED  
 LINEARLY TO 0.5 WATTS AT +125°C.

1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2.0 MARKING.

- 2.1 MARK UNIT AS SHOWN.  
 (REF.: INK-08094-27-XX)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

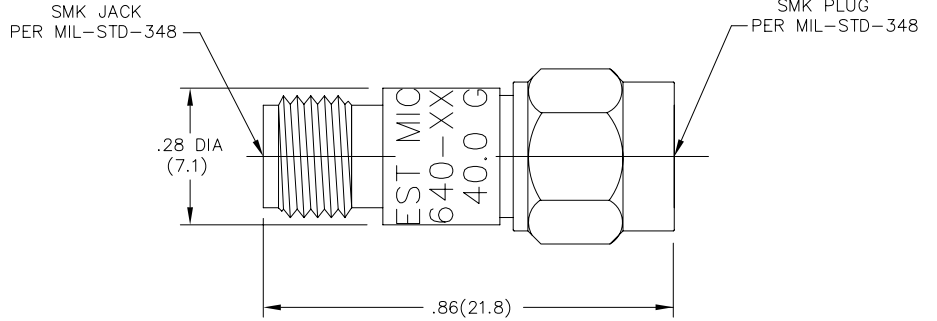

MODEL NUMBER  
 ATT-0640-XX-29M-02  
 REV. B

REV.	DESCRIPTION	DATE
1	RELEASED	11/19/02
A	EON 19924	6/29/04
B	EON 19989	8/2/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FORM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave TITLE: ATTENUATOR 2.9MM	
DRAWN/DATE: S. ORLOV 11/14/02 CHECKED/DATE: _____	ENG/DATE: G. KOZAK 11/19/02 APPROVED/DATE: _____	DRAWING NUMBER: ATT-0640-XX-29M-02 SCALE: 5=1 SHEET 1 of 1