
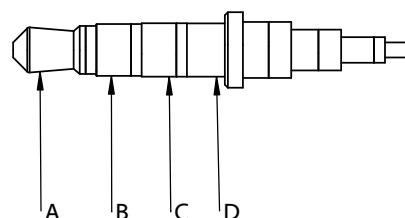


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00008	Connector, 3.5xL26.6 mm, 4C audio plug, brass, nickel plated	2	
2	30-00413	Wire, 4C TC, 26 AWG, 30V, 80C, 3.7 mm, shielded, PVC, 89A	1	
3	24-00075	Overmold, PVC, black	2	

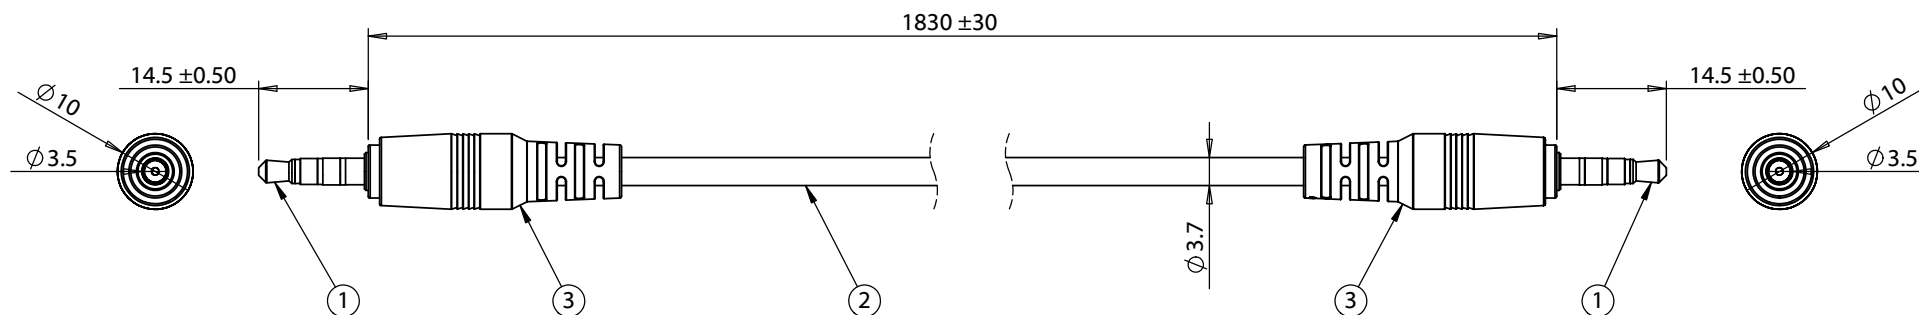

50-00008	Wiring diagram Wire Color	50-00008
A	Red	A
B	Black	B
C	Yellow	C
D	Green	D

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	TENSILITY 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com		
A	1/19/2009	Re-issue CUI to Tensility template	VERIFIED:	RoHS and REACH compliant			
A1	5/11/2009	Added p/n 50-00008 to spec		Function test: no open, no reversed polarity, no short circuit, no intermittent			
A2	8/30/2011	Updated description & connector information	DIMENSIONS ARE IN MILLIMETERS	Hi-Pot test: 300 Vac, 0.5 mA, 1 second			
A3	3/20/2014	Updated description		Current rating: 2 A			
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Cable, 1830 mm, 4C 3.5 mm 50-00008 plug to same, 26 AWG, 30-00413	SIZE A	PART NUMBER 053-0114R (CA-354S-MM)	
						SCALE: 1:1	SHEET 1 OF 1