



**Distributor of Bel Fuse Inc.: Excellent Integrated System Limited**

Datasheet of 40-9725M - D-Sub Connector Plug, Male Pins 25 Position Free Hanging (In-Line)  
Solder Cup

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## **Excellent Integrated System Limited**


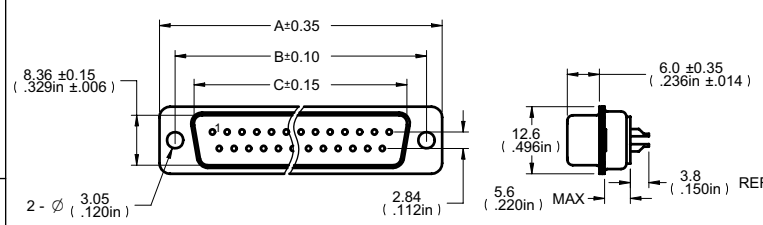
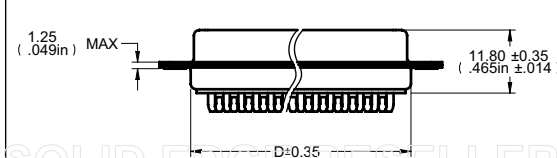

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[40-9725M](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

	5	4	3	2	1																														
<b>受控 CONTROLLED DOCUMENT</b> <b>CONTACT US: sales@integrated-circuit.com Website: www.integrated-circuit.com</b>					DRAWING NO. <b>40-97XXM</b>																														
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:15%;">编号 P/N</td> <td style="width:15%;">40-97XXM</td> <td style="width:15%;">版本 Rev</td> <td style="width:15%;">02</td> <td style="width:15%;">日期 Rel'd Date</td> <td style="width:15%;">Jul11,11</td> </tr> </table>	编号 P/N	40-97XXM	版本 Rev	02	日期 Rel'd Date	Jul11,11	Description: 97 Series Solder Style Panel & Cable Mount D-Sub Connectors  Part No: 40-97xxM  Application: For Cable  Crimp Tool: N/A  Impedance: N/A  Frequency Range: 0-15 MHz  Material: Housing Steel Nickel plated Insulator PBT+Fiber-glass UL94-V0 White Contact Cu-alloy, Gold plated  RoHS Compliance: Yes  Technical Detail: N/A			<b>REVISIONS</b> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="6">OFFICIAL RELEASE</th> </tr> <tr> <td style="width:10%;">01</td> <td style="width:10%;">02-20-09</td> <td style="width:10%;">V</td> <td style="width:10%;">B</td> <td style="width:10%;">T</td> <td style="width:10%;"></td> </tr> <tr> <td colspan="6">                     CHANGE SHELL PLATING FROM YELLOW ZINC TO NICKEL;                      CHANGE DIMENSIONS:                      3.50MAX TO 3.8REF;                      D DIMENSION FOR 40-9725M FROM 41.28 TO 41.10;                      ADD DIMENSIONS:                      1.25MAX; 5.6MAX;                 </td> </tr> <tr> <td>03-25-11</td> <td>J</td> <td>J</td> <td>D</td> <td></td> <td>ECO-11-0055</td> </tr> </table>		OFFICIAL RELEASE						01	02-20-09	V	B	T		CHANGE SHELL PLATING FROM YELLOW ZINC TO NICKEL; CHANGE DIMENSIONS: 3.50MAX TO 3.8REF; D DIMENSION FOR 40-9725M FROM 41.28 TO 41.10; ADD DIMENSIONS: 1.25MAX; 5.6MAX;						03-25-11	J	J	D		ECO-11-0055
编号 P/N	40-97XXM	版本 Rev	02	日期 Rel'd Date	Jul11,11																														
OFFICIAL RELEASE																																			
01	02-20-09	V	B	T																															
CHANGE SHELL PLATING FROM YELLOW ZINC TO NICKEL; CHANGE DIMENSIONS: 3.50MAX TO 3.8REF; D DIMENSION FOR 40-9725M FROM 41.28 TO 41.10; ADD DIMENSIONS: 1.25MAX; 5.6MAX;																																			
03-25-11	J	J	D		ECO-11-0055																														
D				D																															
C	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>P/N</th> <th>Pins</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>40-9709M</td> <td>9</td> <td>30.80</td> <td>24.99</td> <td>16.92</td> <td>19.20</td> </tr> <tr> <td>40-9715M</td> <td>15</td> <td>39.15</td> <td>33.32</td> <td>25.25</td> <td>27.70</td> </tr> <tr> <td>40-9725M</td> <td>25</td> <td>53.00</td> <td>47.04</td> <td>38.96</td> <td>41.10</td> </tr> <tr> <td>40-9737M</td> <td>37</td> <td>69.30</td> <td>63.50</td> <td>55.42</td> <td>57.30</td> </tr> </tbody> </table>			P/N	Pins	A	B	C	D	40-9709M	9	30.80	24.99	16.92	19.20	40-9715M	15	39.15	33.32	25.25	27.70	40-9725M	25	53.00	47.04	38.96	41.10	40-9737M	37	69.30	63.50	55.42	57.30	C	
P/N	Pins	A	B	C	D																														
40-9709M	9	30.80	24.99	16.92	19.20																														
40-9715M	15	39.15	33.32	25.25	27.70																														
40-9725M	25	53.00	47.04	38.96	41.10																														
40-9737M	37	69.30	63.50	55.42	57.30																														
B				B																															
A				A																															
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>TOLERANCE UNLESS OTHERWISE SPECIFIED</td> <td>DRAWN BY <b>JEAN.JIN</b></td> <td>DATE 03-25-11</td> </tr> <tr> <td>DECIMALS</td> <td>CHECKED BY <b>JEAN.JIN</b></td> <td>DATE 03-25-11</td> </tr> <tr> <td>X</td> <td>± 0.5</td> <td></td> </tr> <tr> <td>X.X</td> <td>± 0.3</td> <td></td> </tr> <tr> <td>X.XX</td> <td>± 0.1</td> <td></td> </tr> <tr> <td>ANGLES</td> <td>± 0.5°</td> <td></td> </tr> <tr> <td></td> <td>APPROVED BY <b>DONALD</b></td> <td>DATE 03-25-11</td> </tr> <tr> <td></td> <td>U/M</td> <td>mm</td> </tr> </table>				TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY <b>JEAN.JIN</b>	DATE 03-25-11	DECIMALS	CHECKED BY <b>JEAN.JIN</b>	DATE 03-25-11	X	± 0.5		X.X	± 0.3		X.XX	± 0.1		ANGLES	± 0.5°			APPROVED BY <b>DONALD</b>	DATE 03-25-11		U/M	mm	<b>CUSTOMER COPY</b>  TITLE 97 SERIES SOLDER STYLE PANEL & CABLE MOUNT D-SUB CONNECTORS							
TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY <b>JEAN.JIN</b>	DATE 03-25-11																																	
DECIMALS	CHECKED BY <b>JEAN.JIN</b>	DATE 03-25-11																																	
X	± 0.5																																		
X.X	± 0.3																																		
X.XX	± 0.1																																		
ANGLES	± 0.5°																																		
	APPROVED BY <b>DONALD</b>	DATE 03-25-11																																	
	U/M	mm																																	
THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.				SHEET 1 OF 1	DRAWING NO. <b>40-97XXM-CUST</b>																														
				SIZE A																															
5	4	3	2	1																															