

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Cinch Connectivity Solutions](#)
[27-9104](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

ITEM ①	ITEM ②	ITEM ③	ITEM ④	ITEM ⑤
PART NUMBER	BODY	CONTACT	INSULATOR	CRIMP SLEEVE
27-9104	BRASS NICKEL PLATED	BRASS GOLD PLATED	DELTRIN	BRASS NICKEL PLATED
				ZINC NICKEL PLATED

DRAWING NO.	27-9104
REVISIONS	
01	OFFICIAL RELEASE 08-18-09
	2009.09 09.24.05 TUBRO

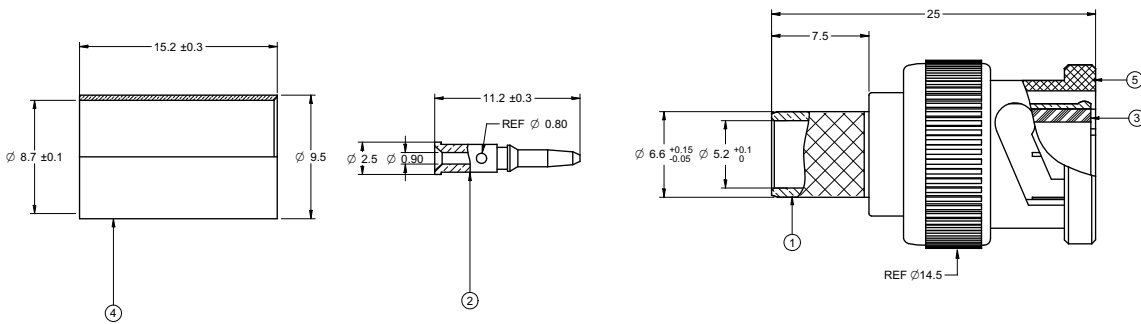

受控 CONTROLLED DOCUMENT				
编号 P/N	27-9104	版本 Rev	01	日期 Rel'd Date
				SEP 14,09

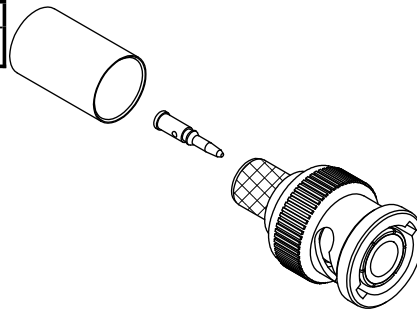

NOTES:

1. IMPEDANCE: 50 OHMS NOMINAL
2. FREQUENCY RANGE: 0-4 GHz
3. CABLE ACCEPTABILITY: BELDEN 8281
4. CABLE RETENTION: 20 lbs MIN
5. RECOMMENDED TEMPERATURE RANGE: -55 °C TO +85 °C
6. FURTHER TECHNICAL DETAIL: REFER TO EMERSON DOCUMENT P/N 27-0000

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY LINDA WU	DATE 08-18-09	 cinch connectivity solutions a bel group
DECIMALS	mm	CHECKED BY LINDA WU	DATE 08-18-09	
X	+ 0.5	APPROVED BY THOMAS	DATE 08-18-09	
.XX	+0.2	TITLE BNC 3PC CRIMP FOR 8281		
ANGLES	+ 0.5°	UM		
THIS DRAWING WAS PRODUCED BY COMPUTER. DO NOT SCALE DRAWING OR UPDATE MANUALLY.				
SHEET 1 OF 1			DRAWING NO. 27-9104	SIZE C