

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol RF](#)
[242201](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REV.	DATE	DESCRIPTION
NC	05/28/07	INITIAL RELEASE

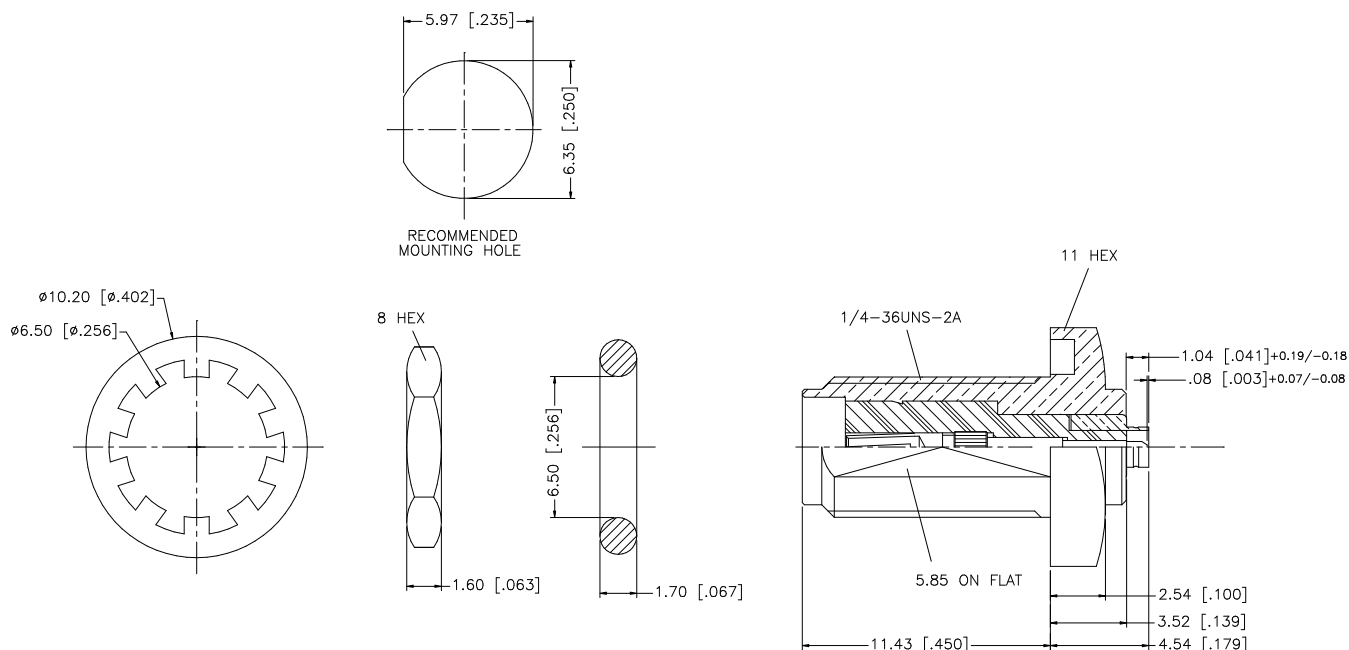

NOTE:
1. MAX. PANEL THICKNESS = 3.8mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex SMA JACK TO U.FL MALE ADAPTER —					
8					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	G.R.S.	05/28/07							
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED								PART DESCRIPTION	
6	HEX NUT	BRASS	GOLD	1			ISSUED									
5	LOCK WASHER	BRASS	GOLD	1			SHEET	1 OF 1				PART NO.				
4	GASKET	SILICONE	RED	1							242201					
3	CONTACT PIN	BER. COPPER	GOLD	1			CAD FILE		C:/242/242201.DWG		DWG. NO. 242201.DWG		REV. NC	SIZE A	SCALE NA	
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING											